




2023




PRODUCT CATALOG

**LIGHTING • WIRING DEVICES • POWER DISTRIBUTION & CONTROL • GENERATORS
POLE MOUNTING & HARDWARE • VENTILATION & HEATING • VIDEO SURVEILLANCE
WIRE/CABLES/CORD • FIRE DETECTION • HVAC • OIL & GAS • ...& MUCH MORE!**

 West Palm Beach, FL

 litestoreusa.com

 TOLL FREE: 1-888-414-0872

AUTHORIZED

DISTRIBUTOR



Table of Contents

ABOUT US	6	WIRING DEVICES	
LIGHTING: LED LAMPS		SWITCHES.....	30
A LAMPS.....	8	RECEPTACLES.....	31
GU10.....	8	GFCI / AFCI RECEPTACLES.....	32
DECORATIVES.....	8	POWER OUTLETS & PLUGS.....	34
PL LAMPS.....	9	LOCKING DEVICES.....	36
PARS.....	9	POWER STRIPS & EXTENSION CORDS.....	37
R-LAMPS.....	10	OCCUPANCY/VACANCY SENSORS.....	38
MR LAMPS.....	10	DATA COM.....	39
FILAMENT LAMPS.....	10	MISC.....	40
LIGHTING: TAPE KITS & UNDER CABINETS		POWER DISTRIBUTION & CONTROL	
TAPE KITS.....	11	HIGH VOLTAGE TRANSFORMERS.....	43
LIGHTING: LED DOWNLIGHT RETROFIT KITS		LOAD CENTERS.....	44
4-INCH.....	11	METERS/METER SOCKETS.....	45
6-INCH.....	11	SURGE PROTECTION & CIRCUIT BREAKERS.....	46
LIGHTING: LED TUBES		UTILITY ELBOWS & FUSES.....	47
T8 TUBES.....	12	MISC.....	48
U-BEND T8 TUBES.....	12	POLE MOUNTING & HARDWARE	
T5 TUBES.....	13	TENON ADAPTERS/REDUCERS.....	50
SIGN HERO T8.....	13	WRAP AROUND BRACKETS.....	51
REFRIGERATION LIGHTS.....	13	CANTILEVER WOOD POLE BRACKETS.....	51
LIGHTING: LED WAFERS, RETROFIT KITS & DISK LIGHTS		BULLHORN BRACKETS.....	52
FLAT PANEL DOWNLIGHT.....	14	RIGHT ANGLE BRACKETS.....	53
DISK LIGHTS.....	14	MISC.....	53
LIGHTING: LED HIGH BAY RETROFIT LAMPS		VENTILATION & HEATING	
HIGH BAY LAMPS.....	15	EXHAUST FANS.....	54
RETROFIT LAMPS.....	15	HAND DRYERS.....	55
FLOOD HALF MOON RETROFIT LAMPS.....	15	VIDEO SURVEILLANCE	
LIGHTING: DOWNLIGHT HOUSING	15	IP CAMERAS.....	57
LIGHTING: LED EMERGENCY & EXIT SIGNS	16	RECORDING DEVICES.....	57
LIGHTING: LED HID RETROFIT LAMPS	17	STORAGE.....	57
LIGHTING: LED TROFFERS & TROFFER RETROFIT KITS		WIRE/CABLE/CORD	
1x4 TROFFERS.....	18	CABINETS/RACKS.....	58
2x2 TROFFERS.....	19	PDUS/POWER EQUIPMENT.....	60
2x4 TROFFERS.....	18	TV ACCESSORIES.....	60
LIGHTING: LED FLAT PANELS		COMPUTER MONITORS.....	60
1x4 FLAT PANELS.....	19	GENERATORS	
2x2 FLAT PANELS.....	19	HOME BACKUP GENERATORS.....	62
2x4 FLAT PANELS.....	19	TRANSFER SWITCHES.....	64
LIGHTING: LED WALL PACKS		PORTABLE GENERATORS.....	66
MINI WALL PACKS.....	20	GENERATOR PADS.....	67
FORWARD THROW WALL PACKS.....	20	POWER INLET BOX.....	67
FULL CUTOFF WALL PACKS.....	21	FIRE DETECTION	
WALL LIGHTS.....	22	FIRE ALARM CABLES.....	68
CYLINDER LIGHTS.....	23	ANNUNCIATORS.....	68
LIGHTING: LED LINEAR WRAPS & STRIP FIXTURES		REMOTE LYNC.....	68
LINEAR HIGH BAYS.....	23	FLAME DETECTORS.....	69
VAPOR TIGHT MOUNTS.....	23	SMOKE DETECTORS.....	69
LINEAR WRAPS.....	24	EXTINGUISHERS.....	70
VAPOR PROOFS.....	24	CONTROL PANELS.....	72
STRIPS.....	25	FIRE ALARM ACCESSORIES.....	73
HIGH BAY FIXTURES.....	25	SMOKE ALARMS.....	74
LIGHTING: LED FLOODLIGHTS, SPORT LIGHTERS, MOTION SENSORS & TEMP LIGHTS		ADDRESSABLE DEVICES.....	75
FLOODLIGHTS.....	26	HORN STROBES.....	76
SPORT LIGHTERS.....	27	CABINETS.....	76
MOTION SENSORS SECURITY LIGHTS.....	27	ESCAPE LADDERS.....	76
LIGHTING: LED AREA, CANOPY & BARN LIGHT FIXTURES		HVAC	
CANOPY LIGHTS.....	28	HVAC DRIVES.....	78
AREA LIGHTS.....	29	AC MOTORS.....	78
BARN LIGHTS.....	29	MINISPLITS.....	78
LIGHTING: GROW LIGHTS	29	CONDENSATE ADAPTERS.....	79
LIGHTING: LED SPORT LIGHTERS	29	MOTOR CAPACITORS.....	79
		MISC.	
		WIRE CONNECTORS NON-WINGED.....	80
		WIRE CONNECTORS WINGED.....	81
		PHOTO CONTROLS.....	82
		TIME SWITCHES.....	86
		SAFETY.....	87
		ELECTRICAL MOTOR.....	88
		SOCKETS.....	89



Industrial, Electrical & Lighting



PROCUREMENT, SOURCE AND SERVICE WORLDWIDE

Lite Store USA specializes in the global procurement and supply of equipment to diverse industrial markets.

We are authorized distributors of quality electrical products serving the engineering, construction, petrochemical, commercial, OEM, and utility industries.

We support the procurement, sourcing, shipping, storage and delivery of critical equipment, supplies, spare parts and operational products required at global locations.



ABOUT US//

WHAT WE DO

Successful people ask better questions, and as a result, they get better answers! Lite Store USA is a full line electrical distributor who is committed to providing the highest quality products, competitively priced, with services exceeding our customers' expectations. We continue to provide added value to our business customers. Lite Store USA believes customers in today's market are more demanding than ever and they deserve the best.

We at Lite USA Holdings, Inc will strive to build strong business partnerships with our customers assisting them to grow their business with our quality electrical products, technical knowledge and keeping them updated on all the newest products and labor-saving ideas We carry all types of energy savings products including LED lighting and we perform free energy audits. We carry a full line of electrical distribution products, wire and cable and even data com, and A/C electrical supplies.

PLAN

We are there for our customers! As our business and clients grow, we supply our services throughout Florida, the Caribbean, and the World Wide Web across America. We will take that same loyalty and commitment in representing our customers all over the world.



WORLD TODAY

The future of our business is long-term! In this competitive market, it is essential that companies like Lite Store USA carry a wide range of stock. Thus, we believe customers in today's market are more demanding than ever and they deserve the best. We will strive to build strong business partnerships with our customers assisting them to grow their business with our quality products, technical knowledge and keeping them updated on all the newest products and labor-saving ideas.

S/MBE

We are part of the Small Minority Business Enterprise. Lite Store USA Holdings, Inc d/b/a Lite Store USA is proud to announce our approval for Small/Minority Business Enterprise Certification with the Palm Beach County.

This certificate will benefit us bringing numerous opportunities and special job classifications in the Palm Beach County and other counties.

CONTACT US//

Toll Free: 1-888-414-0872

Email: support@litestoreusa.com



KEYSTONE KT-LED9.5A19-O-850/G2 LED 9.5W A19 LAMP 5000K

- Replaces 60 Watt Incandescent
- Smooth diffused lens for comfortable glare free performance



ITEM #	LUMENS
KT-LED9.5A19-O-850/G2	800L

SATCO S8487 LED 18W FROSTED MEDIUM BASE LED A21 LAMP 5000K

- Uses medium E26 base
- Only utilizes 18W of power



ITEM #	LUMENS	LIFESPAN
S8487	1600L	25,000hrs

SATCO S11254 10W LED WI-FI RGB & TUNABLE WHITE A19 BULB

- Uses medium base
- Can adjust color and white tones



ITEM #	LUMENS	WATTAGE
S11254	800L	10W

SATCO S11250 5W LED WI-FI CLEAR TUNABLE WHITE A19 FILAMENT BULB

- Uses medium base
- Can adjust white tones



ITEM #	LUMENS	WATTAGE
S11254	450L	5W

SATCO S11409 9.8W LED A19 60W EQUAL 5000K

- Uses medium base



ITEM #	LUMENS	WATTAGE
S11409	800L	9.8W

SATCO S11271 5.5W LED WI-FI RGB & TUNABLE WHITE MR16-GU10 LAMP

- Smart LED Bulb
- Has RGB and tunable white colors



ITEM #	LUMENS	WATTAGE
S11271	400L	5.5W

NATURALLED 5942 LED5G25/FIL/35L/922 5 WATT FILAMENT LAMP 2200K

- Equivalent Wattage: 40
- CRI: >90
- Input line voltage: 120
- Powerfactor >0.9
- Dimmable



ITEM #	LUMENS	WATTAGE
5942	350L	5W

NATURALLED 5994 LED6.5A19/FIL/45L/922 6.5 WATT FILAMENT LAMP 2200K

- Equivalent Wattage: 40
- CRI: >90
- Input line voltage: 120
- Powerfactor >0.9
- Dimmable



ITEM #	LUMENS	WATTAGE
5994	450L	6.5W

SATCO S9872 LED 2.5W T6 CANDELABRA LAMP 2700K

- Incandescent Equivalent: 15W
- Lamp Shape: T6
- Base: Candelabra
- ANSI Base: E12



ITEM #	VOLTS	WATTAGE
S9872	120V	2.5W

SATCO S11251 4.5W LED WI-FI CLEAR TUNABLE WHITE G25 FILAMENT GLOBE

- Type: Globe G25
- Base: E26 Medium Screw
- CRI: 80



ITEM #	VOLTS	WATTAGE
S11251	120V	4.5W

TOPAZ LP16/6 SERIES LED 6.5W DIMMABLE PAR16 LAMP

- PAR Series suits multiple residential and commercial interior and exterior applications
- Used as an economic, energy efficient replacement to traditional halogen lamps



ITEM #	LUMENS	WATTAGE
79676-79679	500L	6.5W

NATURALLED 5626 LED-9PAR20/DIM/NFL/40K PAR 20 9 WATTS DIMMABLE 4000K

- Uses medium E26 base
- Has a 4000K white color temperature



ITEM #	LUMENS	WATTAGE
5626	530L	9W

SATCO LED 13W PAR30 LAMP 5000K

- Uses medium E26 base
- Has a 5000K color temperature
- Wattage: 13W
- Lumens: 1000L



ITEM #	NECK LENGTH
S9424	Short
S9434	Regular

NaturalLED 5998 15W LED Medium E26 Base Dimmable PAR38 Lamp 4000K

- Uses medium base and long neck
- Has a 4000K color temperature
- Has a beam angle of 40 degrees



ITEM #	LUMENS	WATTAGE
5998	1200L	15W

SATCO S11258 15W LED WI-FI RGB & TUNABLE WHITE PAR38 FLOOD

- Uses medium base and long neck
- Has a color temperature between 2700K - 5000K



ITEM #	LUMENS	WATTAGE
5998	1200L	15W

LIGHT EFFICIENT DESIGN LED-7318-27A LED 4-PIN (G24Q) PL LAMP-26W CFL EQUAL-857 LUMENS-2700K-BYPASS/ELECTRONIC-VERTICAL

- Efficacy (lm/W):70
- CRI: 81
- Color Temp: 2700K



ITEM #	LUMENS	WATTAGE
LED-7318-27A	837L	12W

LIGHT EFFICIENT DESIGN LED-7300-35K-G2 5 WATT LED PL LAMP-2-PIN GX23 BASE-3500K-550 LUMENS-120-277V OR BALLAST COMPATIBLE

- Input Voltage: Ballast Dependent, 120-277V, 120-277V or Ballast Dependent



ITEM #	LUMENS	WATTS
LED-7300-35K-G2	550L	5W


LIGHT EFFICIENT DESIGN LED-7324-50K-G3 LED 4-PIN (G24Q) PL LAMP - 42W CFL EQUAL - 1200 LUMENS - 5000K - BYPASS/ELECTRONIC

- Efficacy (lm/W): 109
- CRI: 80
- Color Temp: 5000K



ITEM #	LUMENS	WATTS
LED-7324-50K-G3	1200L	11W

SATCO LED 5W A19 CLEAR MEDIUM BASE LED FILAMENT LAMP 2700K

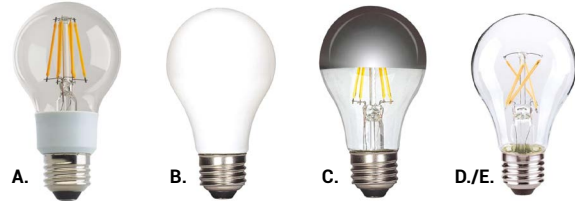

	ITEM #	WATTS	COLOR TEMP	FINISH
A	S29875	5W	2700K	Clear
B	S39825	7.5W	2700K	Soft White
C	S9826	6.5W	2700K	Silver Crown
D	S9845	9W	2700K	Clear
E	S9846	9W	3000K	Clear

KEYSTONE 7W GU5.3 BASE NARROW SPOT 12V MR16 LED BULB

- Incandescent Equivalent: 50W
- Halogen Equivalent: 50W
- Lumens Per Watt: 71
- CRI: 90+



	ITEM #	COLOR TEMP	LUMENS	VOLTS
	KT-LED7MR16-S-930	3000K	500L	12V
	KT-LED7MR16-S-950	5000K	500L	12V

SATCO S11271 5.5W LED WI-FI RGB & TUNABLE WHITE MR16-GU10 LAMP

- Type: Reflector MR16
- Base: E2-Prong Twist-Lock GU10
- CRI: 80



	ITEM #	ENERGY USED	VOLTS
	S11271	5.5W	120V

NATURALLED 5724 LHO18R40/DIM/30K 18 WATTS LED R40 DIMMABLE 3000K

- Direct Replacment for Incandescent R40 Lamp
- Equivanlent wattage: 120 watts
- 40,000 Hours Rated Average Life



	ITEM #	COLOR TEMP	LUMEN OUTPUT
	5724	3000K	1,230

TOPAZ LBR30/8 SERIES LED ECO INDOOR REFLECTORS

- Ambient temp: -4°F to 104°F
- Average Rated Life: 25,000 Hours



	ITEM #	WATTAGE	COLOR TEMP	LUMENS
	74168	8W	2700K	650L
	74169	8W	3000K	650L
	73410	16W	5000K	1200L

SATCO S11257 9.5W LED WI-FI RGB & TUNABLE WHITE BR30 REFLECTOR, T20

- Type: Reflector BR30
- Base: E26 Medium Screw
- CRI: 90



	ITEM #	ENERGY USED	COLOR TEMP	VOLTS
	S11257	9.5W	2700K-5000K	120V

SYLVANIA 40460 9W 120V LED MEDIUM SCREW (E26) BASE BR30 LIGHT BULB 2700K

- Color Changing Available
- Bulb Type: BR30
- Base Type: Medium Screw (E26)



	ITEM #	WATTAGE	FINISH	VOLTS
	40460	9W	Warm White	120V

SATCO S11800 7W 4" LED ADJUSTABLE CCT RETROFIT RECESSED DOWNLIGHT

- Incandescent Equivalent: 50W
- Fixture Type: Retrofit
- Base: Connector



	ITEM #	VOLTS	WATTS
	S11800	120V	7W

TCP LEDWSDR56CCT 6" COLOR & WATT SELECTABLE LED DOWNLIGHT

- Color Temperature: 3000K / 4000K / 5000K
- Life Hours: 50,000
- Dimmable: Yes
- CRI: 80



	ITEM #	VOLTS	LUMENS
	LEDWSDR56CCT	120V	1400L

SATCO S11824 LED 10.5W ADJUSTABLE COLOR TEMP 5-6IN RETROFIT DOWNLIGHT

- Lumen Output: 800
- CRI: 90
- Beam Angle: 90
- Rated Hours: 50000



	ITEM #	VOLTS	WATTS
	S11824	120V	10.5W

SATCO S39759 7W 4" Square Recessed Downlights 5000K

- Lumen Output: 600
- CRI: 90
- Beam Angle: 90
- Rated Hours: 50000



	ITEM #	VOLTS	WATTS
	S39759	120V	7W

SATCO S11260 LED WI-FI 5-6" 10W TUNABLE WHITE RECESSED RETROFIT DOWNLIGHT

- Average Lifetime: 25000hrs
- Base: E26 Medium Screw
- CRI: 90



	ITEM #	VOLTS	WATTS
	S11260	120V	10W

WESTGATE RDPF6-MCT5 LED 6" 13W ADJUSTABLE CCT RECESSED DOWNLIGHT

- Color Temperatures: 2700K/ 3000K/ 3500K/ 4000K/ 5000K
- Dimming: TRIAC DimmingTotal
- Efficacy: 80 LPW
- Lumens: 1040L



	ITEM #	VOLTS	WATTS
	RDPF6-MCT5	120V AC	13W

Westgate RDL4-ST-MCT5 4" 10W LED Smooth Recessed Trim, CCT

- Color Temperature: 27K/30K/35K/40K/50K
- Lumens: 700
- CRI: 90+



	ITEM #	VOLTS	LUMENS
	S11265	120V	2500L

WESTGATE ULR-IN-16F-SO-50K 24V INDOOR STANDARD OUTPUT LED RIBBON 5000K

- Dimming: Dimmable using a magnetic driver
- Max Run: 49ft.
- Efficacy: 66LM/W per ft



	ITEM #	WATTAGE
	ULR-IN-16F-SO-50K	1.5W per ft.

SATCO S11265 LED WI-FI 16' 28W OUTDOOR RGB & TUNABLE WHITE TAPE LIGHT

- Average Lifetime: 25000hrs
- Color Temp: 2700K-6500K
- Type: 28W LED
- CRI: 80



	ITEM #	VOLTS	LUMENS
	S11265	120V	2500L

KEYSTONE 43W T8 8FT LED LAMP

- Replacement for Conventional T8/T12 8 Foot Single-Pin Fluorescent Lamp
- Lumens: 5550L
- 50000 Average rated hours



ITEM #	COLOR TEMP
KT-LED43T8-96G-850-D	5000K
KT-LED43T8-96G-865-D	6500K

SATCO 4FT 12.5W LED SELECTABLE CCT T8 LAMP (CASE OF 25)

- Double Or Single End Wiring
- Lumens: 1800L



ITEM #	COLOR TEMP
S11969	3000K, 3500K, 4000K
S11929	4000K, 5000K, 6500K

KEYSTONE KT-LED18T8-U6GC-840-D 18W LED T8 6" U-BEND LAMP 4000K

- Replacement for Conventional Fluorescent Lamp
- Improved Lamp Durability with Shatterproof Coated Glass



ITEM #	COLOR TEMP
KT-LED18T8-U6GC-840-D	4000K
KT-LED18T8-U6GC-850-D	5000K

SATCO S29993 LED 10W T8 MEDIUM BI-PIN BASE LAMP 5000K

- 50000 Average rated hours
- Medium Bi Pin base
- 10 Watt T8 LED



ITEM #	LUMENS	COLOR TEMP
S29993	1450L	5000K

SATCO S39907 LED 17W MEDIUM BI PIN BASE T8 LAMP 5000K

- 50000 Average rated hours
- Medium Bi Pin base
- 17 Watt T8 LED



ITEM #	LUMENS	COLOR TEMP
S39907	2200L	5000K

WESTGATE T8-EZ6-GS-4FT-18W-50K-C 18 WATTS LED GLASS TUBE LAMPS 5000K

- Provides bright and even lighting
- Do not burn out easily
- 50000 Average rated hours



ITEM #	LUMENS	COLOR TEMP
T8-EZ6-GS-4FT-18W-50K-C	2200L	5000K

WESTGATE T8-EZ6-GS-4FT-18W-50K-F 18 WATTS LED GLASS TUBE LAMPS 5000K

- Provides bright and even lighting
- 50000 Average rated hours
- Do not burn out easily



ITEM #	LUMENS	COLOR TEMP
T8-EZ6-GS-4FT-18W-50K-F	2160L	5000K

SATCO LED 4W LED T5 BI-PIN BASE TUBE LAMP

- Fluorescent Equivalent: 13W
- LED Energy Efficient Fixture
- No external driver option for lasting retrofit conversion.



ITEM #	COLOR TEMP
S11908	4000K
S11909	5000K

KEYSTONE 25.5W 4FT T5 LED LAMP 4000K

- Improved Lamp Durability with Shatterproof Coated Glass
- Passes drop tests: 6' on hard surface
- Suitable for Dry/Damp Locations
- Wattage: 25.5W
- Lumens: 3205



ITEM #	COLOR TEMP
KT-LED25.5T5HO-48GC-840-S	4000K
KT-LED25.5T5HO-48GC-840-S	5000K

WESTGATE LED REFRIGERATOR LAMP

- Operates on line voltage with existing electronic ballast
- Color Temperature: 5000K
- Beam Spread: 120°



ITEM #	LUMENS	WATTS
T-RFG-5FT-22W-50K-C	3100L	22W
T-RFG-6FT-30W-50K-C	4200L	30W

SATCO LED 25W LED 4FT T5 BI-PIN BASE TUBE LAMP

- 3250 Lumens
- 120-277 Volts
- Cool white temperature
- Shatter-proof materials



ITEM #	COLOR TEMP
S29718	4000K
S29719	5000K

KEYSTONE 22W T5 LED TUBE LAMP

- 22W T5 LED Tube
- 10V Dimming



ITEM #	COLOR TEMP
KT-LED22T5HO-48G-840-E	4000K
KT-LED22T5HO-48G-850-E	5000K

KEYSTONE LED 18W 4FT T8 FREEZER/CABINET TUBE LAMP

- Uniquely Made for Freezer/Cabinet/Display Applications
- Includes Mounting Brackets and 72" Power Cord, 2-Prong US Plug
- Lumens: 2250L
- Beam Spread: 220°



ITEM #	COLOR TEMP
KT-FTLED18T8-48P-840	4000K
KT-FTLED18T8-48P-850	5000K

KEYSTONE LED T8 SIGN HERO 360 LAMP

- Replacement for conventional T12HO and T8HO fluorescent lamps for sign applications
- Single- or double-sided outdoor signage
- Color Temperature: 4000K/6500K



ITEM #	LUMENS	WATTS	SIZE
KT-LED7T8-18P2S-840-D / KT-LED7T8-18P2S-865-D	865L / 900L	16W	1.5ft
KT-LED16T8-36P2S-840-D / KT-LED16T8-36P2S-865-D	1900L / 2000L	7W	3ft
KT-LED26T8-60P2S-840-D / KT-LED26T8-60P2S-865-D	3120L / 3250L	26W	5ft
KT-LED16T8-72P1S-840-D / KT-LED16T8-72P1S-865-D	1920L / 2000L	16W	6ft

KEYSTONE KT-LED24T8-108P1S-840-D 24W 9FT SINGLE SIDED BALLAST BYPASS LED T8 SIGN LAMP 4000K (CASE OF 9)

- 180° Single-Sided SignHero lamp for 1-sided signs
- Installed in less than 5 minutes
- Color Temperature: 4000K



ITEM #	LUMENS
KT-LED24T8-108P1S-840-D	2900L

ESL VISION ODSK-6-15W-22750-DA 6-IN 15W LED DISK LIGHT W/ PIR SENSOR, 1100 LM, 120V, SELECTABLE CCT


- Selectable CCT: 2700K/3000K/3500K/4000K/5000K
- Time delay settings
- Slim Profile



ITEM #	LUMENS
ODSK-6-15W-22750-DA	≤1100L

EURI-LIGHTING DLC4SQ-2000E 9W LED 4" SQUARED SLIMLINE TRIM 3000K

- Lumen Output: 600
- Efficacy: 66 Lm/W
- Beam Angle: 120°
- Color Temperature: 3000K/4000K/5000K
- CRI: 80



ITEM #	VOLTS	WATTS
2000E	120V/60Hz	9W

EURI-LIGHTING DLC6S-12W105SE 12W LED 6" SLIMLINE TRIM, CCT ADJUSTABLE

- Lumen Output: 1000
- Efficacy: 83 Lm/W
- Beam Angle: 120°
- CRI: 80



ITEM #	VOLTS	WATTS
DLC6S-12W105SE	120V/60Hz	12W

TCP 219F12A227KBN 20W LED 12" FLUSH MOUNT FIXTURE 2700K

- Mounts directly to junction box
- Brushed nickel finish for a sleek, modern look



ITEM #	COLOR TEMP
219F12A227KBN	2700K
218F12A235KBN	3500K

SATCO S11260 LED WI-FI 5-6" 10W TUNABLE WHITE RECESSED RETROFIT DOWNLIGHT

- Average Lifetime: 25,000hrs
- Light Output: 850L
- Base: Direct Wired
- CRI: 80



ITEM #	SIZE	WATTS
S11261	4in.	10W
S11262	6in.	22W

ESL VISION WAFERS KELVIN ADJUSTABLE

- Color Temperature: 2700/3000/3500/4000/5000K
- CRI: 80
- Voltage: 120VAC



ITEM #	WATTS	LUMENS
ESL-WFR-4-10W-22750	10W	650L
ESL-WFR-6-15W-22750	15W	1000L

SATCO/NUVO BLINK LUXE LED 13" ROUND DESIGNER SURFACE MOUNT FIXTURE 3000K

- Frequency: 50/60Hz
- Voltage: 120-277V



ITEM #	COLOR
62-1515	White
62-1516	White
62-1518	Nickel

ESL VISION 4IN DISKS, 120 V TRIAC

- Universal Input 120-277V
- CRI: 90+
- Wattage: 10W



ITEM #	COLOR	LUMENS
ESL-DSK-4-10W-327-WH	White	650L
ESL-DSK-4-10W-330-BZ	Bronze	850L
ESL-DSK-4-10W-340-WH	White	650L

ESL VISION 6" 15W SURFACE MOUNT DOWNLIGHT

- Lumen Output: Up to 1,150L
- Input Voltage: 120 VAC
- CRI: >90



ITEM #	COLOR TEMP
ESL-DSK-6-15W-327	2700K
ESL-DSK-6-15W-330	3000K
ESL-DSK-6-15W-340	2700K

ELITE LIGHTING B6IC-AT-W 6" UNIVERSAL IC AIRSHUT HOUSING

- With quick connects
- Air shut gasket



ITEM #	SIZE	DIMENSIONS
B6IC-AT-W	6in.	25" x 7" x 7.25"

ROYAL PACIFIC 8301HA 4 INCH LOW VOLTAGE AIRTIGHT HOUSING

- UL, cUL listed
- Non-IC
- MR16 bulb



ITEM #	SIZE	VOLTS	WATTS
8301HA	4in.	12V	50W

ROYAL PACIFIC 8102HRA 6 INCH IC AIRTIGHT REMODEL HOUSING

- IC Rated
- Incandescent



ITEM #	SIZE	WATTS
8201HRA	6in.	75W (max)

TOPAZ LED FIRE RATED NEW CONSTRUCTION RECESSED HOUSING

- 2 hour fire rated UL Listed
- ASTM Standard E283-04



ITEM #	SIZE
70290	4in.
70291	6in.

KEYSTONE 8" SCONCE LED RETROFIT 4000K

- Total System Drive Current: 350mA
- Lumens Per Watt: 127 Lm/W
- Driver Efficiency: 80%
- Volts: 120V



ITEM #	WATTS	LUMENS
KT-RKIT-HCP-8-650-840-FDMI	7W	650L
KT-RKIT-HCP-8-1150-840-FDMI	11W	1150L

KEYSTONE 115W MOGUL BASE EX39 HID REPLACEMENT LED LAMP

- Input Voltage: 120-277Vac
- Lumens: 15100
- Efficacy: 131 Lm/W
- Visible Light Area: 180°



ITEM #	COLOR TEMP
KT-LED115HID-V-EX39-840-D	4000K
KT-LED115HID-V-EX39-850-D	5000K

SATCO 70W LED HID REPLACEMENT ADJUSTABLE CORN BULB

- Power Factor: 0.90
- Base: Mogul Extended



ITEM #	COLOR TEMP	HID EQUIV.
S13120	2700K	250
S13121	4000K	250
S13122	5000K	250

KEYSTONE KT-RKIT-RP-11-4000-850-VDIM 11" 26 / 34W RECTANGULAR LED RETROFIT 5000K

- Lumens Per Watt: 112 - 127 Lm/W
- Lumens: 3030 - 4200
- Driver Efficiency: 85%
- Wattage: 26 / 34W



ITEM #	VOLTS
KT-RKIT-RP-11-4000-850-VDIM	120-277V

KEYSTONE MOGUL BASE EX39 HID REPLACEMENT LED LAMP 5000K

- Input Voltage: 120-277Vac
- Efficacy: 148 Lm/W



ITEM #	WATTS	LUMENS
KT-LED27HID-H-EX39-850-D	27W	4000L
KT-LED45HID-H-EX39-850-D	45W	6350L
KT-LED63HID-H-EX39-850-D	63W	9450L

WESTGATE LED 180° HID RETROFIT LAMP 5000K

- Housing: Magnesium alloy,AL,PC
- Powerfactor: 0.9
- Efficacy: 110LM/W



ITEM #	WATTS
CL-FLT-115W-50K-E39	115W
CL-FLT-54W-50K-E39	54W
CL-FLT-75W-50K-E39	75W

MORRIS 73432 LED RED COMBO WH HOUSE SQUARE

- Completely Self-Contained
- Fully Automatic Operation
- Push to Test Switch
- Automatic Low Voltage Disconnect (LVD)



ITEM #	VAC OPERATION
73432	120 or 277

MORRIS 73603 LED NEW YORK CITY CODE EMERGENCY LIGHT

- 20-Gauge Steel Housing
- Dual-Voltage input 120/277V
- Maintenance-Free Nickel-Cadmium Battery
- Optional 3rd Lamp Head Included



ITEM #	OPERATION TEMP.
73603	50°F - 104°F

MORRIS 73452 LED WET LOCATION RED EXIT SIGN

- Low-Profile, Unobtrusive Design
- Ni-Cad or NI-Mh Battery Backup
- Completely Self-Contained
- Fully Automatic Operation



ITEM #	VAC OPERATION
73452	120 - 277

PROFUSION LED PLEDU2RMWEM EDGELIT DOUBLE FACE RED EXIT SIGN

- Ultra bright, energy efficient, long life Red LEDs



ITEM #	INPUT VOLTAGE
73432	120/277V (dual voltage)

TOPAZ 75120 STEEL, NYC APPROVED LED RED EXIT WITH BATTERY BACKUP

- Red EXIT letters - 8" height & 1" stroke
- 20-gauge steel housing with white powder coating
- Ceiling, wall, or side mounting



ITEM #	INPUT VOLTAGE
75120	120/277V (dual voltage)

TOPAZ LED COMPACT EXIT SIGN WITH BATTERY BACKUP

- Location: Damp
- Construction: Thermoplastic
- Frequency: 50/60 Hz
- CRI: N/A



ITEM #	INPUT VOLTS	COLOR
75119	120/277V (dual voltage)	Red
77588	120/277V (dual voltage)	Green

TOPAZ 77589 LED GREEN EXIT SIGN AND EMERGENCY LIGHT COMBO 120/277V

- Long-life, energy-efficient LED light source
- Universal mounting canopy for easy installation
- Uses less than 4 watts
- Push to test switch



ITEM #	INPUT VOLTAGE
73432	120/277V (dual voltage)

TOPAZ 75140 STEEL NYC APPROVED EXIT SIGN AND EMERGENCY LIGHT COMBO

- 8" height & 1" stroke with three, 1W glare-free adjustable LED lamp heads
- 20-gauge steel housing with white powder coating
- Wall or side mounting capability



ITEM #	INPUT VOLTAGE
75140	120/277V (dual voltage)

PROFUSION LED PRLCDCNYXTE3RW43 LED 3 HEAD EXIT & EMERGENCY STEEL COMBO

- Knockouts provided on sides of unit to relocate lamp heads
- Ultra bright, energy efficient, long life
- Red LED exit sign illumination
- LVD (low voltage disconnect)



ITEM #	INPUT VOLTAGE
PRLCDCNYXTE3RW43	120/277V (dual voltage)

SATCO S39393 45W HIGH-PRO INDUSTRIAL/COMMERCIAL MOGUL EX LED CORN BULB 5000K

- Incandescent Equivalent: 300W
- Fluorescent Equivalent: 65W
- HID Equivalent: 175W



ITEM #	VOLTS	WORKING VOLTS
S39393	120-277V 50/60Hz	AC90-305V

SATCO S39395 80W HIGH-PRO INDUSTRIAL/COMMERCIAL MOGUL EX LED CORN BULB 5000K

- Incandescent Equivalent: 400W
- Fluorescent Equivalent: 100W
- HID Equivalent: 320W



ITEM #	VOLTS	WORKING VOLTS
S39395	120-277V 50/60Hz	AC90-305V

SATCO S29679 90W HIGH LUMEN HIGH-PRO LED MULTI-BEAM CORN BULB 5000K

- Built in Surge Protection: 5KV
- Power Factor: >0.9
- Base: Mogul Extended



ITEM #	VOLTS	WORKING VOLTS
S29679	120-277V 50/60Hz	AC90-305V

GE 93096445 LED450BT56/750 LED 450W HIGH BAY RETROFIT 4000K

- CRI: 70+
- Dimmable: No



ITEM #	VOLTS	LUMENS
93096445	277-480V	65,000L

GE 93096547 LED450BT56/750 LED 450W HIGH BAY RETROFIT 5000K

- Dimmable: No
- CRI: 70
- Life Hours: 50,000



ITEM #	VOLTS	LUMENS
93096547	277/347/480	65,000L

ESL VISION CL SERIES

- Efficacy: Up to 123 lm/W
- CRI: >80
- Input Voltage: 120-277 VAC
- Color Temperature: 3000K, 4000K, 5000K



ITEM #	BASE	WATTS
ESL-CL-0918W-53050-S-M	E26	9/12/18
ESL-CL-0918W-53050-EX39	EX39	9/12/18
ESL-CL-1227W-53050-S-M	E26	12/18/27

ESL VISION CORN LAMP, 100-277VAC, 3000/4000/5000 KELVIN ADJUSTABLE

- Lumens: 4,680
- Operating Temperature: -4 to 149°F



ITEM #	LAMP BASE	WATTS
ESL-CL-36W-53050-S-M	E26	36W
ESL-CL-36W-53050-S-M	EX39	36W
ESL-CL-46W-53050-S-M	E26	46W
ESL-CL-46W-53050-EX39	EX39	46W
ESL-CL-55W-53050-S-M	E26	55W
ESL-CL-55W-53050-EX39	EX39	55W
ESL-CL-80W-53050-EX39	E26	80W
ESL-CL-120W-53050-EX39	EX39	80W

CREE CR14-40L-40K-S 44W 1 X 4 LED RECESSED ARCHITECTURAL TROFFER 4000K

- Applications: Area Lighting, Cove Lighting
- Voltage: 120V-277V AC
- Emergency Backup
- UL Listed



CREE LIGHTING

ITEM #	WATTS
CR14-40L-40K-S 44W	44W

KEYSTONE 1X4 34W LED CENTER BASKET TROFFER

- CRI: >82
- Lumens: 4215 - 4390
- Efficacy: 124 - 129 Lm/W
- Input Voltage: 120-277V
- Wattage: 34W



KEYSTONE

ITEM #	COLOR TEMP
KT-CBLED34-14A-840-VDIM-P	4000K
KT-CBLED34-14A-850-VDIM-P	5000K

WESTGATE LTRE-2X2-MCTP LED SELECTABLE COLOR TEMP. & WATTAGE TROFFER

- Wattage: 26W, 32W, 40W
- Color Temperature: 3000K, 4000K, 5000K



WESTGATE

ITEM #	INPUT VOLTAGE
LTRE-2X2-MCTP	AC100V-277V, 50/60Hz

CREE ZR14-40L-850-10V5-UNV 29W 1X4 LED TROFFER CENTER BASKET 4000 LUMENS 5000K

- Lumens: 3490
- Voltage: 120V-277V
- Efficacy (lm/W): 125
- CRI: 80



CREE LIGHTING

ITEM #	WATTS
ZR14-40L-850-10V5-UNV	29W

ESL VISION ESL-SPE-930-14-SMK SURFACE MOUNT KIT FOR 1X4 TROFFER

- Dimensions: 47.36in(L) x 11.93in(W) x 2.47in(H)



ESL

ITEM #
ESL-SPE-930-14-SMK

TCP TRV2UZD38CCT 38W 2X2 LED WATTAGE & CCT SELECTABLE VOLUMETRIC TROFFER

- Selectable Color - 3500, 4100, or 5000 Kelvin
- Lumens - 2600, 3200, or 4200
- DLC 5.0 premium



TCP

ITEM #	WATTS	DIMMING
TRV2UZD38CCT	38W	0-10V

CREE CR24-40L-40K-S 2X4 LED HIGH DEFINITION 4000K ARCHITECTURAL TROFFER

- Lumens Per Watt: 90
- High Definition Color : CRI 80+



CREE LIGHTING

ITEM #	WATTS
CR24-40L-40K-S	44W

TCP TRV4UZD38CCT 50W 2X4 LED WATTAGE & CCT SELECTABLE VOLUMETRIC TROFFER

- Selectable Color - 3500, 4100, or 5000 Kelvin
- Lumens - 2600, 3200, or 4200

TCP



ITEM #	WATTS
TRV4UZD38CCT	38W

ESL VISION ESL-SPE-930-22-SMK SURFACE MOUNT KIT FOR 2X2 TROFFER

- Dimensions: 24in(L) x 24in(W) x 2.47in(H)

ESL



ITEM #
ESL-SPE-930-22-SMK

CREE CR22-32L-40K-S 32W 2X2 LED TROFFER CENTER BASKET 3200 LUMENS 4000K

- Initial Delivered Lumens: 2,000, 3,200 lumens
- Input Power: 22-35W



CREE LIGHTING

ITEM #	EFFICACY
CR22-32L-40K-S	2 3/8 in.

SATCO/NUVO 65-429 LED 40W 2X4 PREMIUM TROFFER FIXTURE 5000K

- Shade Description: Prismatic Lens
- Operating Frequency: 50/60Hz
- Shade Material: Acrylic



SATCO NUVO

ITEM #	WATTS	VOLTAGE
65-429	40W	100-277V

KEYSTONE KT-CBLED45-24A-850-VDIM-P 2X4 45W LED CENTER BASKET TROFFER 5000K

- Efficacy: 124 - 128 Lm/W
- Lumens: 5535 - 5760
- CRI: >82

KEYSTONE



ITEM #	WATTS
KT-CBLED45-24A-850-VDIM-P	45W

WESTGATE LTRE-2X4-MCTP LED SELECTABLE COLOR TEMP. & WATTAGE TROFFER

- Average Life (Hours):50000
- Control:0-10V Dimming
- CRI:80

WESTGATE



ITEM #	WATTS
LTRE-2X4-MCTP	32/40/50

ESL VISION ESL-SPE-930-24-SMK SURFACE MOUNT KIT FOR 2X4 TROFFER

- Dimensions: 47.36in(L) x 24in(W) x 2.47in(H)

ESL



ITEM #
ESL-SPE-930-24-SMK

NUVO 65-573 40W 1X4 LED BACKLIT FLAT PANEL, ADJUSTABLE CCT

- Lumen Output: 4200-4400L
- Adjustable CCT: 3500K/4000K/5000K
- Rated Hours: 50000
- CRI: 80+



NUVO

ITEM #	WATTS	VOLTAGE
65-573	40W	100V-277V

SATCO/NUVO 65-572 50W 2X4 LED BACKLIT FLAT PANEL, ADJUSTABLE CCT

- Lumen Output: 5250L - 5500L
- Adjustable CCT: 3500K/4000K/5000K
- Rated Hours: 50000
- CRI: 80+




SATCO NUVO

ITEM #	WATTS	VOLTAGE
65-572	50W	100V-277V

SATCO/NUVO 65-571 40W 2X2 LED BACKLIT FLAT PANEL, ADJUSTABLE CCT

- Lumen Output: 4200L/4400L/4400L
- Adjustable CCT: 3500K/4000K/5000K
- Rated Hrs: 50000
- CRI: 80+



SATCO NUVO

ITEM #	WATTS	VOLTAGE
65-571	40W	100V-277V

NATURALLED FXPNL50/2X4/8/CCT3 50 WATT 2X4 BACK LIT FLAT PANEL FIXTURE COLOR SELECTABLE

- Fixture Type: 2 x 4 Ft
- Lumen Output: 5,500
- Voltage: 120V-277V
- CRI: >80



naturalled

ITEM #	WATTS
FXPNL50/2X4/8/CCT3	50W

ESL VISION 820 PANEL SURFACE MOUNT KITS FOR 2X4



ITEM #	FITS SIZE	DIMENSIONS
ESL-CSS-820-24-SMK	2x4	23.79in(L) x 47.81in(W) x 1.66in(H)
ESL-CSS-820-14-SMK	1x4	23.79in(L) x 23.79in(W) x 1.66in(H)
ESL-CSS-820-22-SMK	2x2	23.79in(L) x 47.81in(W) x 1.66in(H)

ESL

NaturaLED 7774 LED-FXSECW20/50K/MV 20W LED Security Wall Pack 5000K

- Color Temperature: Natural Light
- Bulb Shape: Linear LED Module
- Lumens: 1769L



ITEM #	WATTS
LED-FXSECW20/50K/MV	20W

SATCO/NUVO 20W LED SMALL WALL PACK 5000K

- Voltage: 100-277V
- Operating Frequency: 50/60Hz



ITEM #	VOLTS
65-266	Black
65-270	White

WESTGATE LED MINI CUTOFF WALL LIGHTS 5000K

- Power factor: >0.9
- Wattage: 12W



ITEM #	FINISH
LMW-12W-50K	Bronze
LMW-12W-50K-WH	White

PROFUSION LED LEDWPPC20W-4K 20 WATTS MINI LED WALL PACK 4000K

- Universal 120-277 AC voltage (50-60Hz) is standard
- CRI:>80



ITEM #	LUMENS
LEDWPPC20W-4K	1,031L

TOPAZ 70746 F-AWP/90/50K/BZ-80 LED 90W ARCHITECTURAL SLIM WALL PACK 5000K

- Average Rated Life: 50,000 (L70)
- HID Equivalent: 320W
- Lumens: 10500
- CRI: 70



ITEM #	VOLTS	WATTS
70746	120-277V, 60Hz	90W

Westgate LED Small Non-Cut-off Wall Pack With Photocell 5000K

- Efficacy: 125 LM/W
- Power factor: 0.9
- Wattage: 20W



ITEM #	FINISH
LESW-20W-50K-P	Bronze
LESW-20W-50K-P-WH	White

ESL VISION ESL-MWP-0815W-13050-BZ MINI WALL PACK, 08/12/15W WATTAGE ADJ., 3000/4000/5000 KELVIN ADJ.

- Operating Temp.: -40°F-113°F



ITEM #	LUMENS	DIMMING
73432	1,901L	0-10V

ESL VISION LED MINI WALL PACK SERIES

- Color Temperatures: 3000K, 4000K, 5000K
- Input Voltage Options: 120-277 VAC
- Life: >60,000 hours



ITEM #	LUMENS	DIMMING
ESL-MWP-1530W-1	3,724L	0-10V

NATURALED 7087 LED-FXTWP40/50K/DB 40W WALLPACK 5000K

- Comes with removable wire guard
- Fixture Voltage: 120/277V
- CRI: 75 • Dimmer



ITEM #	LUMENS	BEAM TYPE
7087	3,043L	Forward Throw

PROFUSION LED PL-WPLED-80W-MV-50K 80 WATTS LED WALL PACKS 5000K

- Power Factor: > 0.98
- Efficacy: 118 Lm/W
- #LED's: 192
- Current: 60mA



ITEM #	LUMENS
PL-WPLED-80W-MV-50K	9,400L

WESTGATE LW360-25W-40K 25W LED ROTATABLE WALL PACK 4000K

- Efficacy: 125LM/W~130LM/W
- Voltage: 120-277VAC 50/60Hz
- Power Factor: >0.9



ITEM #	LUMENS	BEAM ANGLE
73432	3125L/3250L	60°

WESTGATE WML-80NW 80W LED NON-CUTOFF WALL PACK 4000K

- Input current: 0.88A Max
- Power factor: >0.9



ITEM #	LUMENS	BEAM ANGLE
WML-80NW	120-277VAC 50/60Hz	90°

WESTGATE WMX-MCTP-D LED 80 WATTS WALL PACK, CCT TUNEABLE

- Power factor: >0.95
- Efficacy: 110LM/W



ITEM #	VOLTS	WATTS
WMX-MCTP-D	120-277VAC 50/60Hz	80W Max.

TCP TWPUZDB1CCT 35/45/55W LED WALL PACK LUMINAIRE

- Color Temperature: 3000/4000/5000
- Lumens: 4275L or 7425L
- Wattage: 35/45/55



ITEM #	VOLTS
TWPUZDB1CCT	120-277V

ESL VISION LED WALL PACK SERIES

- Selectable Color Temperature: 3000K, 4000K, 5000K
- Input Voltage: 120-277VAC
- Selectable Wattage



ITEM #	LUMENS	EFFICACY
ESL-WP-1545W-53050	6,016L	133lm/W
ESL-WP-30100W-53050	13,422L	135lm/W

SATCO/NUVO 65-259 120W LED CUT-OFF WALL PACK 4000K

- Operating Temp.: -20C (-4F) - +45C (+113F)
- Operating Frequency: 50/60Hz
- Lumen Output: 15102



ITEM #	WATTS	VOLTS
73432	120W	100-277V

NATURALED 9209 LED-FXCWP60/50K/BZ 60W LED WALL MOUNT FIXTURE 5000K

- Die-cast aluminum housing
- Dimmable: 0-10V
- CRI: 70



ITEM #	WATTS	VOLTS
9209	60W	100-277V

NATURALED 9311 LED-FXSWP45/840/BK 45W LED SLIM WALL PACKS 4000K

- Adjustable fixture angle from 0° to 90°
- 1/2" NPT knock out
- CCT: 4000K, 5000K
- CRI:80



ITEM #	DIMMABLE	VOLTS
9311	1-10V	120-277V

TOPAZ 74554 LED 40W FULL CUT-OFF WALL PACK, 5000K

- Efficacy: 125 lm/W
- Perfect for lighting outdoor walkways, landscapes, parking areas and perimeters



ITEM #	COLOR TEMP	WATTS
73432	5000K	40W

WESTGATE 50W LED CUTOFF ADJUSTABLE WALL PACK

- Voltage: 120-277VAC 50/60Hz
- Input Current: 0.38A Max
- Lumens: 4900 - 5200
- CRI: >80



ITEM #	COLOR TEMP	FINISH
LWA-50WW-WH	3000K	White
LWA-50NW	4000K	Bronze

PROFUSION LED 80 WATTS LED FULL-CUTOFF WALL PACK

- Lumens: 9,128
- Lm/W: 117
- Power Factor: > .90



ITEM #	COLOR TEMP
LEDWPFC80W-5K	5000K
LEDWPCA80W-4K	4000K

SATCO 62-102 TRAX LED WALL SCNCE 3000K

- Color Temperature: Warm White
- CRI: 82
- Lumen Output: 285



ITEM #	WATTAGE	VOLTAGE
62-102	10W	120V

SATCO 62-125 FRAME LED WALL SCNCE 3000K

- Finish: Hazel Bronze
- Color Temperature: Warm White
- CRI: 82
- Lumen Output: 800



ITEM #	WATTAGE	VOLTAGE
62-125	10W	120V

WESTGATE LDS-MCT-D-BZ LED 12W BRONZE SELECTABLE CCT DECORATIVE WALL SCNCE

- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Total Lumens: 1200LM
- Rated life: 50,000 Hrs



ITEM #	WATTAGE	VOLTAGE
73432	12W	120V

SATCO/NUVO 20W LED BULKHEAD FIXTURE 3000K

- Voltage: 100-277V
- Operating Frequency: 50/60Hz
- Shade Material: Frosted Glass



ITEM #	FINISH
65-113	White
65-114	Black

SATCO 62-104 WAVE LED WALL SCNCE 3000K

- Color Temperature: Warm White
- CRI: 82
- Lumen Output: 285



ITEM #	WATTAGE	VOLTAGE
62-104	10W	120V

WESTGATE LDS-12W-30K-D LED 12W DECORATIVE WALL SCNCE 3000K

- Efficacy: 100LM/W
- Dimming: Dimmable
- Total lumens: 1200LM
- Color rendering index: >90



ITEM #	WATTAGE	VOLTAGE
LDS-12W-30K-D	12W	120V, 60Hz

NATURALLED 10W BULKHEAD WALL LIGHT

- Aluminum Housing + Frosted Glass Lens
- Input Voltage: 120V
- Beam Angle: Flood
- Instant On



ITEM #	COLOR TEMP	FINISH
7025	5000K	Black
7062	5000K	White

WESTGATE WMC-DL-MCT-BR-DT 15W LED BRONZE OUTDOOR LIGHTING CYLINDER

- Power Factor: >0.95
- Efficacy: 80 LPW



ITEM #	WATTS	VOLTS
WMC-DL-MCT-BR-DT	15W	120V

WESTGATE WMC-DL-MCT-BN-DT 15W LED BRUSHED NICKEL OUTDOOR LIGHTING CYLINDER

- Color Rendering Index: CRI ≥ 80
- Total Lumens: 1200LM
- Color Temperatures: 3000K/4000K/5000K



ITEM #	WATTS	VOLTS
WMC-DL-MCT-BN-DT	15W	120V

WESTGATE WMC-UDL-MCT-BR-DT 30W LED BRONZE OUTDOOR LIGHTING CYLINDER

- Power Factor: >0.95
- Efficacy: 80 LPW



ITEM #	WATTS	VOLTS
WMC-UDL-MCT-BR-DT	30W	120V

WESTGATE WMC-UDL-MCT-BN-DT 30W LED BRUSHED NICKEL OUTDOOR LIGHTING CYLINDER

- Color Rendering Index: CRI ≥ 80
- Total Lumens: 2400LM
- Color Temperatures: 3000K/4000K/5000K



ITEM #	WATTS	VOLTS
WMC-UDL-MCT-BN-DTF	30W	120V

ESL VISION ESL-LHB-2-105W-350-CS3W6P LENSED HIGH BAY, 14175 LUMENS, 80CRI, 0-10V DIMMING

- Wattage: 105 Watts
- Universal Input 120-277V
- Color temperature: 5000K



ITEM #	LUMENS
ESL-LHB-2-105W-350-CS3W6P	14,175L

COMMERCIAL LED L165W5KHBCL11 LED 165W LINEAR HIGH BAY 5000K

- Dimensions: 24.8 x 11.8 x 1.9 in.
- Lumens: 22,500
- CRI: 80



ITEM #	WATTS	VOLTS
L165W5KHBCL11	165W	120-277V

HALCO LHB-4-WS-50-U 320 WATTS PROLED WATTAGE SELECTABLE HIGH BAY-LIN-EAR CCT

- Beam Angle: Wide
- Beam Spread: 110
- Dimmable: Yes
- CRI: 80



ITEM #	COLOR TEMP
LHB-4-WS-50-U	5000K

WESTGATE VTU-20W-50K 20 WATT LED UNIVERSAL ALL MOUNTING VAPOR TIGHT 5000K

- Power factor: >0.95
- Efficacy: 89 LM/W



ITEM #	VOLTS	LUMENS
VTU-20W-50K	120~277V/60Hz	1,785L

SATCO/NUVO 65-173 20W LED ADJUSTABLE VAPOR TIGHT FIXTURE 5000K

- Operating Frequency: 50/60Hz
- Shade Material: Acrylic
- Bulb Base: Direct Wired



ITEM #	VOLTS	LUMENS
65-173	100-277V	2,200L

ESL VISION ID F 414, 153 LM/W

- Operating Temperature: -4 to 104°F
- Universal Input 120-277V
- CRI: +80



ITEM #	COLOR TEMP	WATTS	LUMENS
ESL-ID-F414-S-24W-F35	3500K	24W	3672L
ESL-ID-F414-S-24W-F40	4000K	24W	3672L
ESL-ID-F414-S-24W-F50	3500K	24W	3720L
ESL-ID-F414-S-36W-F35	3500K	36W	5508L
ESL-ID-F414-S-36W-F40	4000K	36W	5436L
ESL-ID-F414-S-36W-F50	5000K	36W	5508L

WESTGATE WAS-4FT-42W-40K-D 42 WATTS LED STANDARD WRAPAROUND 4000K

- Input Voltage: 120-277VAC 50/60Hz
- Power factor: 0.95
- Lm/W: 105
- CRI: >82



WESTGATE

ITEM #	LUMENS	WATTS
WAS-4FT-42W-40K-D	4400L	42W

CREE LS8-80L-40K-10V 8FT LED STRIP LIGHT 88W 4000K 120-277V

- Operating Temperature: -28°C - 35°C
- Rate Life: 50,000 hours
- CRI: 90



CREE LIGHTING

ITEM #	LUMENS	EFFICACY
LS8-80L-40K-10V	8000L	91lm/W

TCP LWR6300135 63W 4FT LED WRAP LIGHT 3500K

- Control: 0-10V Dimming
- Ballast: 9999
- DLC Premium
- CRI: 80



TCP

ITEM #	VOLTAGE	LUMENS
LWR6300135	120-277V	7700L

WESTGATE SCLR-4FT-40W-40K-D 40 WATTS LED SUSPENDED STRIP LIGHT 4000K

- Powerfactor:>0.95
- Efficacy: 110LM/W



WESTGATE

ITEM #	VOLTS	WATTS
SCLR-4FT-40W-40K-D	120-277VAC 50/60Hz	40W

PROFUSION LED SL-8FT-80L-5K 8FT 64 WATTS LED LENSED STRIP 5000K

- Long-life LEDs provide 190,000 hours of operation with at least 70% of initial lumen output
- 0-10vdc dimming capability
- Power factor > 0.90



ProfusionLED

ITEM #	VOLTS
SL-8FT-80L-5K	120-277 AC

KEYSTONE LED VAPOR TIGHT FIXTURE 5000K

- Input Voltage: 120-277V
- Efficacy: 128 Lm/W
- CRI: >82



KEYSTONE

ITEM #	SIZE	WATTS	LUMENS
KT-VTLED44-4A-850-VDIM-P	4ft	44W	5630L
KT-VTLED90-8A-850-VDIM-P	8ft	90W	11520L

ESL VISION VAPOR TIGHT, 4FT, +80CRI, 1-10V DIMMING

- Operating Temperature: -40 to 122°F
- Universal Input 120-277V



ESL

ITEM #	COLOR TEMP	WATTS
ESL-VP4-25W-140	4000K	25W
ESL-VP4-25W-150	5000K	25W
ESL-VP4-45W-140	4000K	45W
ESL-VP4-45W-150	5000K	45W
ESL-VP8-90W-140	4000K	90W
ESL-VP8-90W-150	5000K	36W

ESL VISION LED 860 RETROFIT STRIP SERIES

- Selectable Kelvin: 3500K, 4000K, 5000K
- Input Voltage Options: 120-277 VAC
- Input Frequency: 50/60 Hz
- Max. Efficacy: 130lm/w
- Dimming: 0-10V



ESL

ITEM #	SIZE	LUMENS
ESL-CSS-860-4-2240W-3550K	22W, 30W, 40W	5200L
ESL-CSS-860-8-4575W-3550K	45W, 60W, 75W	9750L

KEYSTONE KT-RHLED100-10C SERIES 100W ROUND LED HIGH BAY FIXTURE

- Input Voltage: 120-277V
- Lumens: 13,000
- Efficacy: 130 Lm/W
- Beam Angle: 110°



KEYSTONE

ITEM #	WATTS
KT-RHLED100-10C-850-VDIM-P	100W

ESL VISION ECONOMY ROUND HIGH BAY SERIES

- Efficacy: 160 lm/W
- Input Power: 120-277VAC
- Color Temperature: 5000K



ESL

ITEM #	WATTS	MAX. OUTPUT	COLOR	DIMENSIONS
ESL-ERHB-90W-150-WH-90D	90W	15,783L	White	10.85x3.95
ESL-ERHB-90W-150-BK-90D	90W	15,783L	Black	10.85x3.95
ESL-ERHB-135W-150-WH-90D	135W	22,080L	White	10.85x3.95
ESL-ERHB-135W-150-BK-90D	135W	22,080L	Black	10.85x3.95
ESL-ERHB-180W-150-WH-90D	180W	29,959L	White	12.42x3.95
ESL-ERHB-180W-150-BK-90D	180W	29,959L	Black	12.42x3.95

ESL VISION LED 800 STRIP SERIES

- Selectable Kelvin: 3000K, 4000K, 5000K
- Input Voltage: 120-277 VAC
- Input Frequency: 50/60 Hz
- Dimming: 0-10V



ESL

ITEM #	SELECTABLE WATTS	LUMENS
ESL-CSS-800-2-20W-3050K	20W	2456L
ESL-CSS-800-4-2245W-3050K	22W, 33W, 45W	5201L
ESL-CSS-800-8-3369W-3050K	33W, 50W, 69W	8251L

KEYSTONE KT-RHLED100-10C SERIES 100W ROUND LED HIGH BAY FIXTURE

- Input Voltage: 120-277V
- Lumens: 13,000
- Efficacy: 130 Lm/W
- Beam Angle: 110°



KEYSTONE

ITEM #	WATTS
KT-RWDLED150-17C-850-VDIM-P	150W

COMMERCIAL LED UFO HIGH BAY 5000K

- Lumens: 32,400
- CRI: 80
- Voltage: 100-277V



COMMERCIAL LED

ITEM #	DIMENSIONS	WATTS
L240W5KUFOCL11	14.17in x 8.98in	240W
L250W5KUFOCL99	16.54in x 6.97in	250W

WESTGATE LF3-50WW-KN 50 WATT LED FLOOD LIGHT 3000K

- Finish: Dark Bronze
- Color Temperature: 3000K
- Beam Angle: 104°



WESTGATE

ITEM #	WATTS	LUMENS
LF3-50WW-KN	50W	4900L

NATURALLED 9316 LED-FXFDL30/77/50K/ BZ-KNC 30W MINI FLOOD LIGHT 5000K

- Excellent thermal design
- Knuckle can be adjusted +/- 90°
- CCT: 4000K, 5000K
- Rated 50,000 hours average life



naturalled

ITEM #	INPUT VOLTS	CRI
9316	120-277V	80

PROFUSION LED FLOOD LIGHT WITH SLIP FITTER 5000K

- Housing: Die-cast aluminum with powder coat finish (Dark Bronze)
- Voltage: 120-277 volts, 60Hz AC



ProfusionLED

ITEM #	WATTS	LUMENS
PLEDESB-240W-50K	240W	31,200L
PLEDESB-300W-50K	300W	39,000L

WESTGATE LED MULTI-POWER HIGH LUMEN FLOOD LIGHT

- Voltage: 120~277V AC/50~60 Hz
- Wattage: 50/ 80/ 100/ 150W
- Total Lumens: 21400LM Max.
- Dimming: 0~10V dimmable



WESTGATE

ITEM #	COLOR TEMP
LFX-LG-50-150W-40K	4000K
LFX-LG-50-150W-50K	5000K

WESTGATE LFCO-100W-50K 100W LED HIGH LUMEN FLOOD LIGHTS 5000K

- Efficacy: 140LM/W
- Power factor: >0.90
- THD: <20%
- Dimmable: 0~10V Dimming



WESTGATE

ITEM #	VOLTS	WATTS
LFCO-100W-50K	120~277V	100W

NATURALLED 9318 LED-FXFDL50/77/50K/ BZ-KNC 50W MINI FLOOD LIGHT 5000K

- Die-cast aluminum housing and polycarbonate lens
- Excellent thermal design
- Knuckle can be adjusted +/- 90°
- CCT: 4000K, 5000K
- Rated 50,000 hours average life



naturalled

ITEM #	INPUT VOLTS	CRI
9318	120-277V	80

NATURALLED 7641 LED-FXSAL360/50K/ DB/3S 360 WATT SLIM AREA LIGHT 5000K

- Operating Temp: -22°F~122°F
- Lumens: 43200
- CRI: 70



naturalled

ITEM #	WATTS	VOLTS
7641	360W	120-277V

WESTGATE LFX-XL-150-300W-30K LED MULTI-POWER HIGH LUMEN FLOOD LIGHT 3000K

- Voltage: 120~277V AC/50~60 Hz
- Wattage: 150/ 200/ 240/ 300W
- Power Factor: >0.9



WESTGATE

ITEM #	COLOR TEMP
LFX-XL-150-300W-30K	3000K
LFX-XL-150-300W-40K	4000K
LFX-XL-150-300W-50K	5000K

WESTGATE LFX-XXL-300-600W-50K LED MULTI-POWER HIGH LUMEN FLOOD LIGHT

- Voltage: 100~277V AC/50~60 Hz
- Wattage: 300/ 400/ 500/ 600W
- Power Factor: >0.9
- THD: <20%
- Dimming: 0~10V dimmable



WESTGATE

ITEM #	LUMENS	EFFICACY
LFX-XXL-300-600W-50K	84000L	140 LPW

WESTGATE MANUFACTURING 3 CCT 2-HEADS SECURITY LIGHT WITH MOTION SENSOR

- Wattage: 20W
- Voltage: 100 to 277
- Lumens: 1900
- CRI: 80



WESTGATE

ITEM #	COLOR
SL-20W-MCT-BZ-P	Bronze
SL-20W-MCT-WH-P	White

ESL VISION CONTRACTOR AREA LIGHT SERIES

- Finish: Bronze or White



ESL

ITEM #	WATTS	LUMENS	EFFICACY (lm/W)	COLOR TEMP
ESL-CAL-80185W-140-ff-T3	80W	12640	158	4000K
	120W	18240	152	
	150W	22200	148	
ESL-CAL-80185W-150-ff-T3	80W	12800	160	5000K
	120W	18360	153	
	150W	22500	150	
ESL-CAL-200350W-140-ff-T3	185W	26833	147	4000K
	200W	30600	153	
	240W	35760	149	
ESL-CAL-200350W-150-ff-T3	280W	39480	141	5000K
	350W	48671	141	
	200W	30800	154	
ESL-CAL-200350W-150-ff-T3	240W	36000	150	5000K
	280W	39760	142	
	350W	50601	147	

WESTGATE LED STADIUM FLOOD LIGHT

- Color Temperature: 5000K
- Voltage: 120~277VAC
- Lens: Prismatic polycarbonate lens
- LED: Philips Lumileds Luxeon 5050



WESTGATE

ITEM #	WATTS
SFX-G5-600W-30D-50K	600W
SFX-G5-1000W-30D-50K	1000W

NATURALLED 9396 LED SPORT LIGHT

- Surge Protect Level: 20KV
- DLC Premium Qualified
- IP66 Rated
- ETL Listed



naturalled

ITEM #	COLOR TEMP	INPUT VOLTAGE	SURGE PROTECTOR LEVEL	WATTS
9396	4000K	277-480V	20KV	400W
9442	5700K	120-277V	6KV	500W
9399	4000K	277-480V	12KV	650W

ESL VISION FLOOD LIGHT SERIES

- Selectable Color Temp: 3000K/4000K/5000K
- Mounting: Universal 1/2" Knuckle & Yoke
- Dimensions: 7.0" x 3.0" x 5.0"
- Finish: Bronze or White



ESL

ITEM #	WATTS	LUMENS	EFFICACY (lm/W)
ESL-FLD-1535W-13050-ff	15W	2064/2224/2186	138/148/146
	25W	3258/3480/3379	130/139/135
	35W	4503/4796/4772	129/137/136
ESL-FLD-5090W-13050-ff	50W	6909/7415/7337	138/148/147
	70W	9085/9777/9679	130/140/138
	90W	10967/11896/11473	122/132/127
ESL-FLD-105150W-13050-ff	105W	14099/15148/14837	134/144/141
	120W	15591/16590/16027	130/138/134
	150W	19557/20793/20154	130/139/134

PROFUSION LED CPLED-45W-5K-MV-TH 45 WATT LED CANOPY 5000K

- CRI: >80
- Color Temperature: 5000K



ITEM #	WATTS	LUMENS
CPLED-45W-5K-MV-TH	45W	4948L

WESTGATE CGL-100W-40K 100W LED GARAGE LIGHT 4000K

- Lens: Prismatic polycarbonate lens
- Dimmable: 0~10V Dimming
- LED: Philips Lumileds LEDs
- Total lumens: 13000LM



ITEM #	COLOR TEMP	WATTS
CGL-100W-40K1	4000K/5000K	100W

WESTGATE CDX-35W-35K-BR 35W 120-277V PENTALUX LED ADJUSTABLE CANOPY LIGHT 3500K

- Lens: Prismatic polycarbonate lens
- Housing Color: Bronze or White
- Dimmable: 0~10V Dimming
- Power factor: 0.90



ITEM #	WATTS	LUMENS	COLOR TEMP
CDX-35W-35K-BR	35W	4600L	3500K

NATURALED SLIM CANOPY FIXTURE

- Housing: Powder-coated painted aluminum
- Operating Temperature: -22 to 122
- Mounting: Pendant or J-Box
- Watts: 42W
- CRI: 80



ITEM #	LUMENS	COLOR TEMP
9418	5517L	4000K
9419	5517L	5000K

NATURALED 7555 LED-FXGSC150/50K/WH 150 WATT GAS STATION CANOPY 5000K

- 50,000 Hours rated average life
- Beam Angle: 115°
- CRI: 80



ITEM #	VOLTS	WATTS	COLOR TEMP
7555	120-277V	150W	5000K

WESTGATE CDL2-80CW 80W 120-277V CANOPY/GARAGE LIGHT 5000K

- Lens: Prismatic polycarbonate lens
- Dimmable: 0~10V Dimming
- Power factor: 0.90



ITEM #	COLOR TEMP	WATTS
CDL2-80CW	5000K	80W

ESL VISION ESL-CP-3060W-43050-BZ 30-40-60W LED CANOPY

- Lumen Output: Up to 7,296 Lumens
- Wattage: 30 - 40 - 60W



ITEM #	INPUT VOLTAGE
ESL-CP-3060W-43050-BZ	120-277 VAC

SATCO 11" LED COLOR SELECTABLE ROUND CANOPY FIXTURE

- Color Temperature: 3000K/4000K/5000K
- Lumens: 11946-13999LM
- Efficacy: 135LM/W



ITEM #	WATTS	COLOR
65-632	100W	Bronze
65-631	100W	White

PROFUSION LED PL-FLLED-300W-MV-50K 300 WATTS LED FLOOD LIGHT 5000K, 120-277V

- Number of LED's: 96
- Current: 150mA
- Dimmable: 0-10V



ITEM #	WATTS
PL-FLLED-300W-MV-50K	300W

PROFUSION LED PLSBC8-300W-120V-50K-AW LED 300W WHITE SHOEBOX AREA LIGHT 5000K

- LED Lifetime: 50,000 Hours
- Chipset: Philips Lumileds
- 10KA Surge Protection



ITEM #	WATTS	LUMENS
PLSBC8-300W-120V-50K-AW	300W	42,000

SATCO/NUVO 65-538 50W LED LARGE FLOOD LIGHT 4000K

- Lumen Output: 5717 - 5793
- Voltage: 120V / 277V
- Wattage: 50W
- CRI: 80



ITEM #	COLOR TEMP
65-538	4000K
65-539	5000K

SATCO/NUVO 25W LED DUSK TO DAWN AREA LIGHTING FIXTURE

- Watts: 25W
- Finish: Black Finish



ITEM #	COLOR TEMP	VOLTS	LUMENS
65-244	4000K	120-277V	2200L
65-245	5000K	120-277V	2200L

TCP LED SECURITY LIGHT 4000K

- Can be used outdoors when protected from elements
- Impact resistant acrylic lens, durable silver powder coat
- Mounts to a wall or horizontal arm up to 1.63in O.D.
- Volts: 120V-277V



ITEM #	WATTS	LUMENS
RSLUA140KPCSV	40W	5500L
RSLUA240KPCSV	27W	3800L

PLANTMAX LED JN-LED/G6 630W JUNGLE GROW LIGHTS

- External controller connectivity
- External Control Connectivity
- Multiple spectral options
- Full-cycle Spectrum



ITEM #	WATTS	VOLTS
JN-LED/G6	630W	100-277V

PLANTMAX LED JN-LED/G2/J1 240W JUNGLE GROW LIGHTS

- External Control Connectivity
- Multiple spectral options
- Corrosion Resistance
- Full-cycle spectrum
- Surge Protection



ITEM #	WATTS	VOLTS
JN-LED/G2/J1	240W	100-277V

PLANTMAX LED JN-LED/T5/44 T5 44 FIXTURE

- Rated Diode Lifetime: 50,000 hours
- Certification: UL1993, UL1598C, CE
- Light Output: 14,000LM
- Wattage per LED: 25W



ITEM #	WATTS	VOLTS
JN-LED/T5/44	100W	100-277V

HOWARD FLOOD LIGHT FIXTURE SPORTS ARENA METAL HALIDE

- UL Listed for wet locations
- ANSI Ballast type: M47 CWA



ITEM #	WATTS	VOLTS
SL-1000-MH-4T	1000W	Quad-Tap 4T
SL-1000-MH-480	1000W	480V
SL-1500-MH-4T	1500W	Quad-Tap 4T
SL-1500-MH-480	1500W	480V

COMBO TWO SINGLE POLE SWITCHES

COMMERCIAL GRADE

- Single Pole / Single Pole AC
- Grounding
- Side Wired



Aida
CORPORATION

ITEM #	VOLTS	AMPS	COLOR
020101	120V	15	White

THREE WAY TOGGLE SWITCHES

COMMERCIAL GRADE

- Grounding
- Side Wired



Aida
CORPORATION

ITEM #	VOLTS	AMPS	COLOR
020041	120V	15	White

SINGLE POLE TOGGLE SWITCHES

COMMERCIAL GRADE

- Grounding
- Side Wired



Aida
CORPORATION

ITEM #	VOLTS	AMPS	COLOR
020011	120V	15	White

FOUR WAY FRAMED TOGGLE SWITCH

COMMERCIAL GRADE

- Grounding
- Side Wired



Aida
CORPORATION

ITEM #	VOLTS	AMPS	COLOR
020071	120V	15	White

SINGLE POLE TOGGLE SWITCHES

COMMERCIAL GRADE

- Grounding
- Back & Side Wired



LEVITON

ITEM #	VOLTS	AMPS	COLOR
110453	120-277	30	Green

DOUBLE POLE TOGGLE SWITCHES

COMMERCIAL GRADE

- Grounding
- Back & Side Wired



LEVITON

ITEM #	VOLTS	AMPS	COLOR
44831	120-277	30	Green
50446	120-277	20	Red

SINGLE POLE DECORA ROCKER SWITCH

COMMERCIAL GRADE

- Grounding
- Back & Side Wired



ENERLITES

ITEM #	VOLTS	AMPS	COLOR
91150-W	120-277	15	White

THREE WAY DECORA ROCKER SWITCH

COMMERCIAL GRADE

- Grounding
- Back & Side Wired



ENERLITES

ITEM #	VOLTS	AMPS	COLOR
93150-W	120-277	15	White

LOCKING SWITCH

INDUSTRIAL GRADE

- Single Pole
- Self-Grounding
- Back & Side Wired
- Dimmer



Aida
CORPORATION

ITEM #	VOLTS	AMPS	COLOR
08002	120V	15	White

LOCKING SWITCH KEY

LEVITON

ITEM #
DUEL-153P-WH



COMBO SWITCHES

COMMERCIAL GRADE

- Single Pole / 5-15R AC
- Grounding
- Side Wired



Aida
CORPORATION

ITEM #	VOLTS	AMPS	COLOR
020111	120-277	15	White

TAMPER RESISTANT SINGLE RECEPTACLES

COMMERCIAL GRADE

- 125V
- 2P/3W
- Back & Side Wired
- Self-Grounding



Aida
CORPORATION

ITEM #	VOLTS	AMPS	COLOR
030381	120-277	15	White

AMP FLUSH MOUNT RECEPTACLE

INDUSTRIAL GRADE



Aida
CORPORATION

ITEM #	VOLTS	AMPS	COLOR
030646	120V	15	White

FOUR-PORT USB RECEPTACLE

- Type A 2.0 USB Chargers
- 4.2 Amp Charging Power
- 25 Watt



ENERLITES

ITEM #	VOLTS	AMPS	COLOR
620004USB5.8W	120V	5.8	White

DUPLEX RECEPTACLES

HOSPITAL GRADE

- 125V
- 2P/3W
- Narrow Body
- Back & Side Wired
- Isolated Ground
- Nickel-Plated Steel Strap



ENERLITES

ITEM #	VOLTS	AMPS	COLOR
62110	125V	20	Orange

TAMPER RESISTANT DUPLEX

COMMERCIAL GRADE

- 125V
- 2P/3W
- Back & Side Wired
- Self-Grounding



ENERLITES

ITEM #	VOLTS	AMPS	COLOR
61580_TR-W	125V	15	White

TAMPER RESISTANT

COMMERCIAL GRADE

- 125V
- 2P/3W
- Side Wired
- Self-Grounding



ENERLITES

ITEM #	VOLTS	AMPS	COLOR
62040_TR-W	125V	20	White

TAMPER & WEATHER RESISTANT

INDUSTRIAL GRADE

- 125V
- 2P/3W
- Back & Side Wired
- Self-Grounding



Aida
CORPORATION

ITEM #	VOLTS	AMPS	COLOR
030134	120V	15	White

DECORA DUPLEX RECEPTACLE

COMMERCIAL GRADE

- Self Grounding
- Back & Side Wired
- Steel Strap - White



ENERLITES

ITEM #	VOLTS	AMPS	COLOR
61501_TR-W	125V	15	White

TAMPER RESISTANT USB RECEPTACLE

- 2.0 USB Chargers
- Back & Side Wired



LEVITON

ITEM #	VOLTS	AMPS	COLOR
031071	120-277	15	Green
031091	120-277	20	Red

WEATHER & TAMPER RESISTANT RECEPTACLE

GFCI

- Back & Side Wired
- Self Indicator Light
- Self Grounding



Aida
CORPORATION

ITEM #	VOLTS	AMPS	TYPE
010081	120V	20	WEATHER
010071	120V	20	TAMPER

SMARTLOCK PRO DUPLEX W/ AUDIBLE ALARM

HOSPITAL GRADE GFCI

- 2P/3W
- Side Wired
- Surge w/ Indicator Light
- Audible Alarm



Audible alarm alerts you when surge protection is gone.

LEVITON

ITEM #	VOLTS	AMPS	COLOR
16492	125V	15	White
398183	125V	15	Ivory



SMARTLOCK PRO DUPLEX

GFCI

- 2P/3W
- Back & Side Feed-Through
- Wallplate & Self Grounding Clip
- Self Testing
- Monochromatic

ITEM #	VOLTS	AMPS	COLOR
851394	125V	15	White
851396	125V	15	Ivory
851464	125V	20	White
852142	125V	20	Ivory

LEVITON

AFCIs

SMARTLOCK PRO DUPLEX

- Screws & Self-Grounding Clip
- Arc Fault - Tamper Resistant
- 2P/3W
- Back & Side Wired



LEVITON

ITEM #	VOLTS	AMPS	COLOR
461423	125V	15	White
475703	125V	15	Ivory
470893	125V	20	White
498553	125V	20	Ivory

SMARTLOCK PRO DUPLEX

HOSPITAL GRADE GFCI

- 2P/3W
- Back & Side Feed-Through




LEVITON

ITEM #	VOLTS	AMPS	COLOR
868644	125V	20	Red
875751	125V	20	White
870694	125V	20	Ivory

TAMPER RESISTANT SMARTLOCK PRO DUPLEX

GFCI

- Back & Side Wired
- Nylon Wallplate
- Self Grounding Clip
- Self Testing
- Monochromatic



Aida
CORPORATION

ITEM #	VOLTS	AMPS	RESISTANCE
010031	120V	15	Tamper
010041	125V	15	Tamper/Weather

AFCI VS. GFCI




ARC FLASH CIRCUIT INTERRUPTERS or AFCIs detect dangerous arcing in a circuit, extension cord, or appliance that could cause a fire. When arcing is detected, the AFCI trips immediately, cutting electricity to the circuit.



GROUND FAULT CIRCUIT INTERRUPTERS or GFCIs detect the slightest amount of unwanted electrical current flow and trip immediately, cutting power to the circuit and protecting the person using the outlet. Without GFCI protection, a person could be shocked or electrocuted.

MORRIS SCREWLESS WALLPLATES

These sleek decorative wallplates have a screwless snap-in design that gives a smooth finish without recessed lines. The decorative compatible two piece kit allows easy retrofit to any decorative installation, and they're made of a virtually unbreakable thermoplastic material that is easy to clean & maintain attractive appearance. (UL Listed)

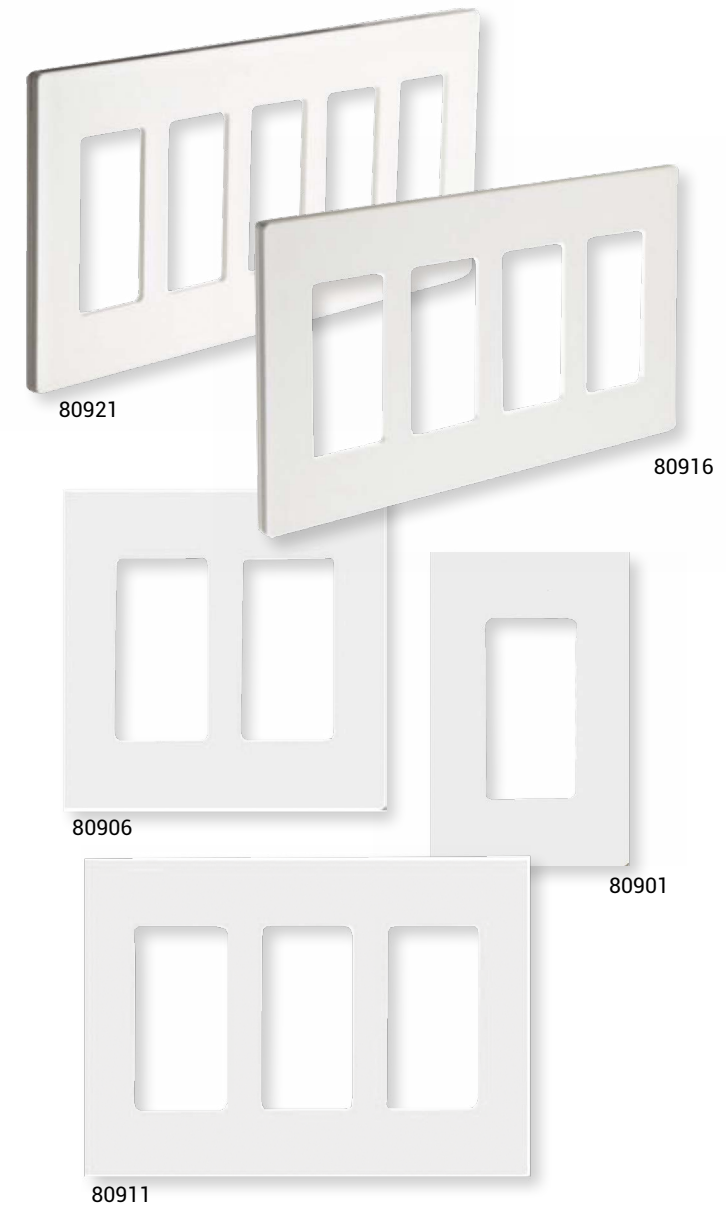

COLOR OPTIONS:





Built from durable thermoplastic, Aida power devices are available: in flush mount and surface mount versions, come equipped with heavy-gauge, double-wire copper alloy contacts. To ensure correct and speedy wiring, terminals have ID markings. Flush mount receptacles fit Aida range of wall plates and mounting screws is included. Angle plugs are made of tough, heavy-duty nylon for a long dependable service life.

FLUSH MOUNT OUTLET

FLUSH MOUNT POWER OUTLET	NEMA	AMPS	VOLTS	PART #	WIRING TYPE
30 Amp Flush Mount Power Outlet	6-30R	30	250V	030606	2-Pole, 3-Wire
50 Amp Flush Mount Power Outlet	6-50R	50	250V	030616	2-Pole, 3-Wire
30 Amp Flush Mount Dryer Outlet	10-30R	30	125/250V	030626	3-Pole, 3-Wire
50 Amp Flush Mount Range Outlet	10-50R	50	125/250V	030636	3-Pole, 3-Wire
30 Amp Flush Mount Dryer Outlet	14-30R	30	125/250V	030646	3-Pole, 4-Wire
50 Amp Flush Mount Dryer Outlet	14-50R	50	125/250V	030656	3-Pole, 4-Wire
30 Amp Flush Travel Trailer Outlet	TT-30R	30	125V	030666	2-Pole, 3-Wire

SURFACE MOUNT POWER OUTLET

SURFACE MOUNT POWER OUTLET	NEMA	AMPS	VOLTS	ITEM #	WIRING TYPE
30 Amp Grounding Surface Mount Power Outlet	6-30R	30	250V	030676	2-Pole, 3-Wire
50 Amp Grounding Surface Mount Power Outlet	6-50R	50	250V	030686	2-Pole, 3-Wire
30 Amp Surface Mount Power Outlet	10-30R	30	125/250V	030696	3-Pole, 3-Wire
50 Amp Surface Mount Power Outlet	10-50R	50	125/250V	030706	3-Pole, 3-Wire
30 Amp Grounding Surface Mount Power Outlet	14-30R	30	125/250V	030716	3-Pole, 4-Wire
50 Amp Grounding Surface Mount Power Outlet	14-50R	50	125/250V	030726	3-Pole, 4-Wire

ANGLE PLUG

ANGLE PLUG	NEMA	AMPS	VOLTS	PART #	WIRING TYPE
30/50 Amp 3-Prong Plug	6-30R & 6-50P	30/50	250V	030736	2-Pole, 3-Wire
30/50 Amp 3-Prong Plug	10-30P & 10-50P	30/50	125/250V	030746	2-Pole, 3-Wire
30/50 Amp 4-Prong Plug	14-30P & 14-50P	30/50	125/250V	030756	3-Pole, 4-Wire
30/50 Amp Power Outlet Angle Plug	7-30P & 7-50P	30/50	277V	030786	2-Pole, 3-Wire
30/50 Amp Power Outlet Angle Plug	24-30P & 24-50P	30/50	347V	030796	2-Pole, 3-Wire
30 Amp Power Outlet Angle Plug	15-30P	30	250V	030806	3-Pole, 4-Wire
50 Amp Power Outlet Angle Plug	15-50P	50	250V	030816	3-Pole, 4-Wire
60 Amp Power Outlet Angle Plug	15-60P	60	250V	030826	3-Pole, 4-Wire
60 Amp Power Outlet Angle Plug	14-60P	60	125/250V	030836	3-Pole, 4-Wire
30 Amp Power Outlet Angle Plug	18-30P	30	120/208V	030846	4-Pole, 4-Wire
50 Amp Power Outlet Angle Plug	18-50P	50	120/208V	030856	4-Pole, 4-Wire
60 Amp Power Outlet Angle Plug	18-60P	60	120/208V	030866	4-Pole, 4-Wire

TRAVEL TRAILER PLUG

TRAVEL TRAILER PLUG	NEMA	AMPS	VOLTS	ITEM #	WIRING TYPE
30 Amp Travel Trailer Plug	TT-30P	30	125V	030766	2-Pole, 3-Wire
30 Amp Travel Trailer Plug	TT-30P	30	120V	030776	2-Pole, 3-Wire

FEATURES & BENEFITS

- Heavy-gauge, double-wipe copper alloy contacts
 - Easy-to-wire terminals accept up to #4 AWG conductors
 - Terminals marked for easy identification and fast wiring
 - All mounting hardware included
 - Flush-mount devices fit single or two-gang outlet boxes
 - Surface-mount devices are commercial grade and have concentric knockouts for 3/4" and 1" conduit and adjustable cord clamp for back and bottom entrance of cable
- Angle Plugs**
- Made of tough, heavy-duty nylon for long service life
 - Devices feature heavy-sectioned dead-front right-angle
 - Pressure-clamp terminal design
 - Terminals accept up to #4 AWG stranded conductors
 - Four-way positioning front module
 - Solid brass blades for maximum conductivity

Aida's locking devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Aida device combines the best materials available with superior production standards to produce a broad selection of locking devices of unmatched flexibility and dependability.

LOCKING PLUGS

LOCKING PLUG	NEMA	AMPS	VOLTS	PART #	WIRING TYPE
20 Amp Locking Plug	L5-20P	20	125V	040156	2-Pole, 3-Wire
30 Amp Locking Plug	L5-30P	30	125V	040056	2-Pole, 3-Wire
20 Amp Locking Plug	L6-20P	20	250V	040166	2-Pole, 3-Wire
30 Amp Locking Plug	L6-30P	30	250V	040116	2-Pole, 3-Wire
20 Amp Locking Plug	L14-20P	20	125/250V	040136	3-Pole, 4-Wire
30 Amp Locking Plug	L14-30P	30	125/250V	040196	3-Pole, 4-Wire

LOCKING CONNECTORS

LOCKING CONNECTOR	NEMA	AMPS	VOLTS	PART #	WIRING TYPE
20 Amp Locking Connector	L14-20R	20	125/250V	040146	3-Pole, 4-Wire
30 Amp Locking Connector	L14-30R	30	125/250V	040206	3-Pole, 4-Wire
20 Amp Locking Connector	L5-20R	20	125V	040046	2-Pole, 3-Wire
30 Amp Locking Connector	L5-30R	30	125V	040066	2-Pole, 3-Wire
20 Amp Locking Connector	L6-20R	20	250V	040106	2-Pole, 3-Wire
30 Amp Locking Connector	L6-30R	30	250V	040126	2-Pole, 3-Wire

LOCKING RECEPTACLES

LOCKING RECEPTACLE	NEMA	AMPS	VOLTS	PART #	WIRING TYPE
20 Amp Locking Receptacle	L5-20R	20	125V	040596	2-Pole, 3-Wire
30 Amp Locking Receptacle	L5-30R	30	125V	040546	2-Pole, 3-Wire
20 Amp Locking Receptacle	L6-20R	20	250V	040576	2-Pole, 3-Wire
30 Amp Locking Receptacle	L6-30R	30	250V	040556	2-Pole, 3-Wire
20 Amp Locking Receptacle	L14-20R	20	125/250V	040566	3-Pole, 4-Wire
30 Amp Locking Receptacle	L14-30R	30	125/250V	040586	3-Pole, 4-Wire



Part# 040056



Part# 040146



Part# 040556



Part# 040586

FEATURES & BENEFITS

- Super tough nylon body resists damage from severe impact, abrasion and chemicals
- Ergonomic, fluted body design with radial grip ridge is ideal for gripping, turning and pulling
- Back wire terminal clamps for easy secure wiring
- One-piece, rivet-less 0.035" thick brass connector contacts and solid brass plug blades provide maximum conductivity and long service life

#14/3 & #12/3 GA. SJTW-3 ORANGE OUTDOOR EXTENSION CORDS

CAT NO.	FOOTAGE	DESCRIPTION	AMPS	WATTAGE	MASTER/INNER
93-5008	25ft.	14-3 SJTW-3 Orange Cord w/Sleeve	15A/125V	1875W	12
93-5009	50ft.	14-3 SJTW-3 Orange Cord w/Sleeve	15A/125V	1875W	6
93-5010	100ft.	14-3 SJTW-3 Orange Cord w/Sleeve	13A/125V	1675W	6
93-5017	25ft.	12-3 SJTW-3 Orange Cord w/Sleeve	15A/125V	1875W	12
93-5018	50ft.	12-3 SJTW-3 Orange Cord w/Sleeve	15A/125V	1875W	6
93-5019	100ft.	12-3 SJTW-3 Orange Cord w/Sleeve	13A/125V	1675W	4



#16/3 GA. SJTW-3 OUTDOOR EXTENSION CORDS

CAT NO.	FOOTAGE	DESCRIPTION	AMPS	WATTAGE	MASTER/INNER
93-5024	25ft.	16-3 SJTW-3 Green Cord w/Sleeve	13A/125V	1625W	12
93-5025	50ft.	16-3 SJTW-3 Green Cord w/Sleeve	13A/125V	1625W	12
93-5026	80ft.	16-3 SJTW-3 Green Cord w/Sleeve	10A/125V	1250W	4
93-5034	8ft.	16-3 SJTW-3 Orange Cord w/Sleeve	13A/125V	1625W	24
93-5035	15ft.	16-3 SJTW-3 Orange Cord w/Sleeve	13A/125V	1625W	12
93-5005	25ft.	16-3 SJTW-3 Orange Cord w/Sleeve	13A/125V	1625W	12
93-5006	50ft.	16-3 SJTW-3 Orange Cord w/Sleeve	13A/125V	1625W	12
93-5007	100ft.	16-3 SJTW-3 Orange Cord w/Sleeve	10A/125V	1250W	6



HEAVY DUTY METAL SURGE POWER STRIP 1,200 JOULES

91-235



FEATURES:

- 1,200 Joules
- LED Indicator
- 5 + 1 Outlets
- 6ft. 14/3 SJT Cord
- Safety Covers
- Ground Protection
- Plastic Housing in Ivory
- Built In Circuit Breaker
- 15A/120V/60HZ
- Case Pack: 6

SURGE SUPPRESSORS

91-229



FEATURES:

- 245 Joules
- 6 Outlet Standard
- Surge Strip W/flat Plug
- 6' Cord
- 15A/125V/1875W
- Case Pack: 12/Master

HEAVY DUTY PLASTIC SURGE POWER STRIP 3,000 JOULES

91-234



FEATURES:

- 3,000 Joules
- Plastic Housing in Black
- Ground Protection
- LED Indicator
- 6 + 2 Outlets
- 2 USB Ports - 2.1A Charging
- 2 Coax Cable Protection
- 6ft. 14/3 SJT Cord
- 15A/120V/60HZ
- Case Pack: 4

STRAIGHT PLUG 6 OUTLET METAL STRIP

91-232



FEATURES:

- 300 Joules
- Surge Indicator Light
- 1 Adapter Receptacle
- 15A/120V/1875W
- Case Pack: 6



800W PIR HIGH BAY OCCUPANCY SENSOR

RESIDENTIAL GRADE

- Single Pole
- Push-In Terminals
- Side Wired



ENERLITES

ITEM #	VOLTS	WATTS	AMPS	COLOR
91150-W	120/277V	800W	15	White

OCCUPANCY PIR MOTION SENSOR

COMMERCIAL & RESIDENTIAL GRADE

- Automatic Lighting Control
- Ground Wire Required
- Pet Immunity



Aida
CORPORATION

ITEM #	VOLTS	WATTS	AMPS	COLOR
070011	120V	800W	15	White

OCCUPANCY/VACANCY MOTION SENSOR IN-WALL SWITCH

COMMERCIAL GRADE

- Wall Switch
- Wired



ENERLITES

ITEM #	VOLTS	WATTS	COLOR
MWOS-W	120/277V	800W	White

VACANCYS SENSOR

COMMERCIAL & RESIDENTIAL GRADE

- Automatic Lighting & Fan Control
- Ground Wire Required
- Pet Immunity



Aida
CORPORATION

ITEM #	VOLTS	WATTS	AMPS	COLOR
070021	120V	800W	15	White

PIR OCCUPANCY MOTION SENSOR SWITCH CEILING MOUNT

RESIDENTIAL GRADE

- Selectable Operation Mode
- Power Pack Required
- Auto-Off After Selected Time-Delay



ENERLITES

ITEM #	VOLTS	AMPS	COLOR
MDC-50L-W	24V	20	White

120-277 VAC POWER PACK

COMMERCIAL & RESIDENTIAL GRADE

- Self-Contained Power Supply
- Low-Voltage Wiring
- Able to Link Up to Six Sensors at a Time




ENERLITES

ITEM #	VOLTS	COLOR
MPP-24-W	120/277V	White

SINGLE GANG WALLPLATES

WHITE

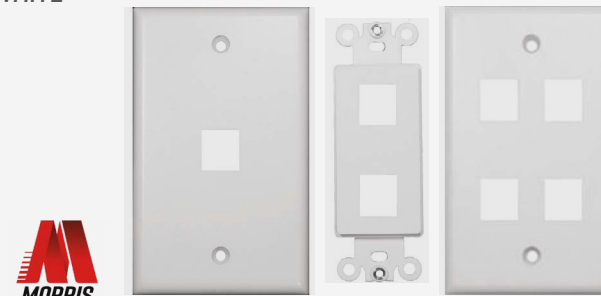


MORRIS

ITEM #	# OF PORTS
88162	1
88114	2
88168	4

WALLPLATE INSERTS


WHITE

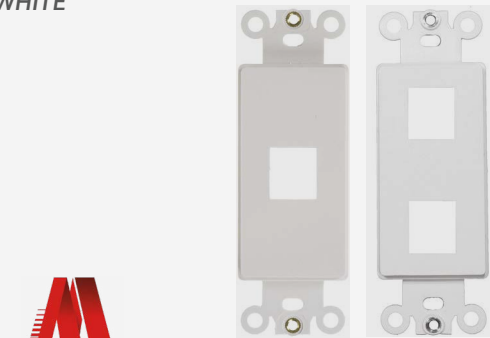

MORRIS

ITEM #	# OF PORTS
88112	1
88114	2


PATCH CORDS

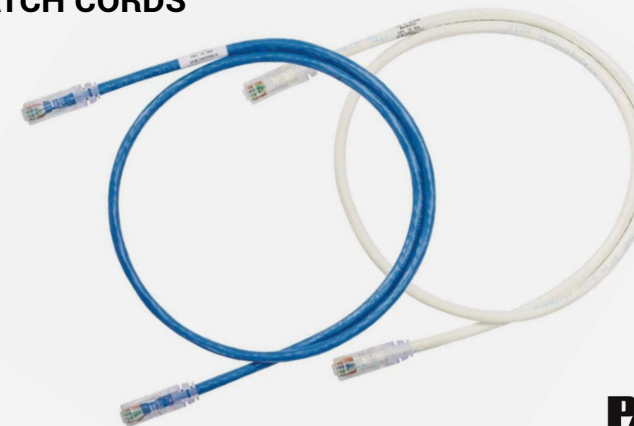

PANDUIT

ITEM #	CATEGORY	COLOR	LENGTH
437754	5E	Blue	5'
535291	5E	Blue	10'
383077	6E	Blue	5'
383079	6E	Blue	10'
781848	5E	Off White	5'
204864	5E	Off White	10'
781849	6E	Off White	5'
202037	6E	Off White	10'


SNAP IN CONNECTORS

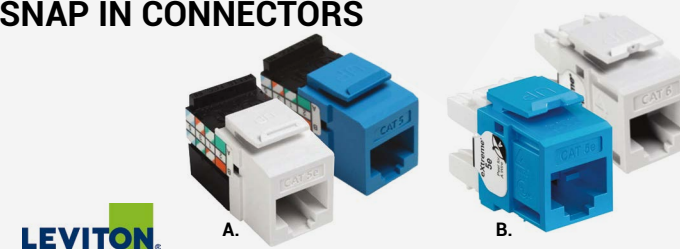

LEVITON

	ITEM #	COLOR	LENGTH
A	54756	5E	Blue
A	54293	5E	White
B	54223	6	Blue
B	54038	6	White

SNAP IN CONNECTORS

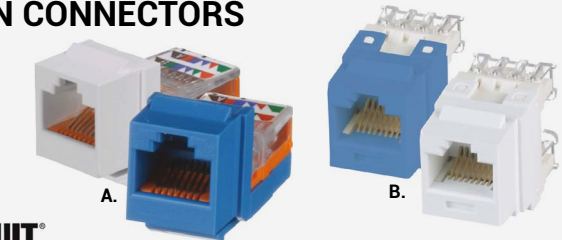


PANDUIT

	ITEM #	COLOR	LENGTH
A	41165	5E	Blue
A	327811	5E	White
B	40774	6	Blue
B	262078	6	White

ON-OFF METAL ROTARY SWITCH 3/8IN

COMMERCIAL RESIDENTIAL GRADE

- Switch: On-Off
- Safety Listing: RU
- Single Circuit

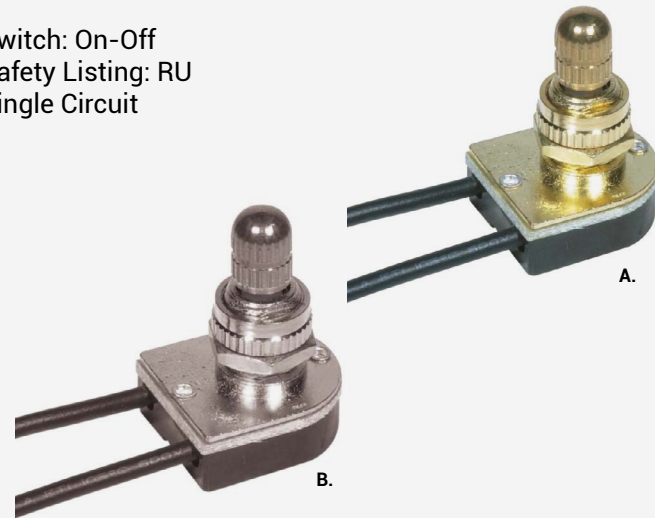

	ITEM #	AMPS/VOLTS	FINISH
A	90-501	6A-125V 3A-250V	Brass Plated
B	90-507	6A-125V 3A-250V	Nickel Plated

ON-OFF METAL ROTARY SWITCH 1 1/2IN

COMMERCIAL RESIDENTIAL GRADE

- Switch: On-Off
- Safety Listing: RU
- Single Circuit
- Metal Bushing



ITEM #	AMPS/VOLTS	FINISH
80-1414	6A-125V 3A-250V	Nickel Plated

20A DUPLEX ROUND FLIP COVER PLATE FLOOR BOX

COMMERCIAL RESIDENTIAL GRADE

- 1-Gang
- Tamper/Weather Resistant
- Outlet Type: Duplex



ITEM #	AMPS	COLOR
975517-C	20	Brass
975517-S	20	Nickel

NON-METALLIC FLOOR BOX W/ THREADED PLUG

- 1-Gang
- UL Listed



ITEM #	MATERIAL	SHAPE	COLOR
FLBRF101BR	Plastic	Rectangular	Brown

AFCIs

SMARTLOCK PRO DUPLEX

- Screws & Self-Grounding Clip
- Arc Fault - Tamper Resistant
- 2P/3W
- Back & Side Wired



ITEM #	VOLTS	AMPS	COLOR
461423	125V	15	White
475703	125V	15	Ivory

SMARTLOCK PRO DUPLEX

HOSPITAL GRADE GFCI

- 2P/3W
- Back & Side Feed-Through



ITEM #	VOLTS	AMPS	COLOR
868644	125V	20	Red

PENDANT STATION WITH STRAIN RELIEF PUSHBUTTON

COMMERCIAL GRADE

- Single-Speed Button
- High-Impact Thermoplastic Enclosure
- Pendant Station



ITEM #	COLOR
9001BW98Y	Yellow

150 WATT MAX CFL AND LED WHITE DIMMER

COMMERCIAL GRADE

- Legend: Start/Stop
- Flush Round
- Mounting: Surface



ITEM #	COLOR
CR104PES12	Red/Black

UNLIGHTED RECTANGULAR BUTTON

RESIDENTIAL GRADE

- Unlighted Rectangular Button
- Raised Design
- Textured White Finish



ITEM #	COLOR
SH-B4008	White

LED/CFL DIMMER - 3-WAY / SINGLE-POLE

RESIDENTIAL GRADE

- Single Pole / 3-Way
- Rocker / Slide Switch
- 150 Watt



ITEM #	VOLTS	COLOR
59302-W	120V	White

150 WATT MAX CFL AND LED WHITE DIMMER

RESIDENTIAL GRADE

- Single Pole / 3-Way
- 150 Watt
- Wall Switch Box



ITEM #	VOLTS	COLOR
DVCL-153P-WH	120V	White


TOUCH PANEL SMART DIMMER

RESIDENTIAL GRADE

- Ergonomic Design
- Mobile App Control
- Power-Saving Mode



ITEM #	VOLTS	WIFI CONTROL
080021	120V	No
080031	120V	Yes

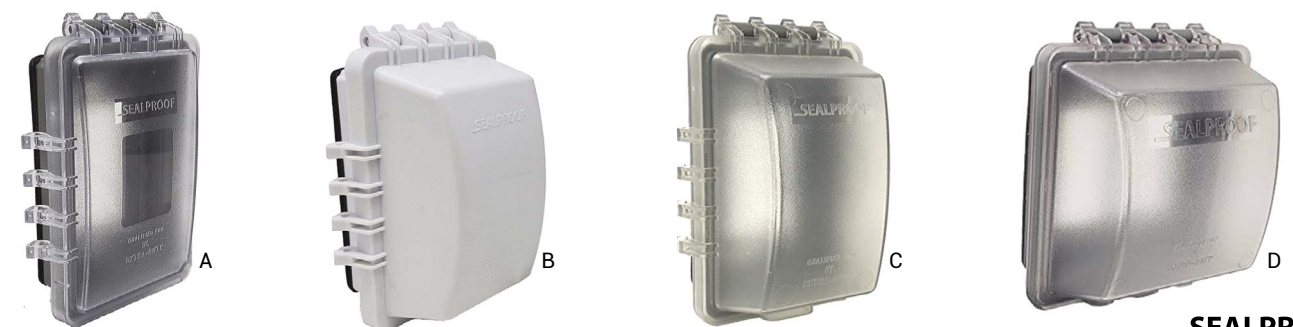

SEALPROOF 1 & 2-GANG WEATHERPROOF IN USE ELECTRICAL POWER OUTLET COVER

GFCI, DUPLX, SWITCH OR ROUND

- Lockable
- Includes Gasket & Mounting Hardware
- Waterproof



ITEM #	CONFIGURATIONS	GANGS	COLOR
A 1GWIUXDSL	18	1	Clear Frost
B 1GWIUXDWH	18	1	White
C 1GWIUXD	18	1	Clear Frost
D 2GWIUXD	45	2	Clear Frost

3P750KVAPM 750 KVA THREE PHASE PAD MOUNT, RC TYPE, PRIMARY 11847Y/6840, SECONDARY 480/277V RECONDITIONED TRANSFORMER

3 PHASE - 750KVA - PAD MOUNT - RECONDITIONED

FEATURES	
Product Type	Reconditioned
Transformer Type	Pad Mount
KVA	750
Phase	3
High Voltage	11847Y/6840
Low Voltage	480Y/277
Taps	W/TAPS 2x2 1/2% +/-
IMP	5.90% imp
Weight	6,770 lbs
Dimensions	66"H x 52"D x 85"W

ACCESSORIES:

- Primary Bushings, Dead Front, Radial Feed
- 8.3/14.4 KV Wells with Inserts
- Bayonet Fusing
- Secondary Bushings, St. Stud Connections w/ Spades
- Oil Level Gauge
- Temperature Gauge
- Pressure/Vacuum Gauge
- Pressure Relief Device
- Pentahead Entry Assembly
- Mineral Oil (standard)
- Non-PCB Label
- Drain Valve with Sampler
- Bell Green Paint
- Undercoating
- Warranty: 36 Month Guarantee

High Voltage: 11847Y/6840
 Low Voltage: 480Y/277
 Taps: W/TAPS 2 X 2 1/2% +/-
 SKU: 3P750KVAPM

***FOR ADDITIONAL INFORMATION, PLEASE EMAIL US AT SUPPORT@LITESTOREUSA.COM.**



Contact us for a dependable supply of transformers and other high voltage electrical apparatus to municipalities, REA's, investor-owned utilities, commercial and industrial customers.

www.litestoreusa.com

1-888-414-0872

support@lifestoreusa.com

1832 Wabasso Drive Suite N
 West Palm Beach, Florida 33409

SQUARE D HOM2448M125PC LOAD CENTER HOMELINE LC 125 A 120/240 V 1 PH MB PON 24 SP N1 COMBO

COMMERCIAL / RESIDENTIAL GRADE

- Load Center Type: Main Breaker
- Combo Flush / Surface Cover
- Electrical Connection: Lugs
- Enclosure Rating: NEMA 1 Indoor
- Tin Plated Aluminium Busbar



ITEM #	SPACES / CIRCUITS	RATED CURRENT
HOM2448M125PC	24 / 48	125A

SIEMENS MC0816B1200RTH 200 AMP 8-SPACE 16-CIRCUIT OH/UG RINGLESS METER COMBO WITH FEED-THRU LUGS

COMMERCIAL / RESIDENTIAL GRADE

- Outdoor
- Combo Flush Load Center
- Meter Socket Type: Ringless-No Bypass
- Mounting Type: Bolt On
- Electrical Product Type: Load Center



ITEM #	VOLTAGE	MAX AMPS
MC0816B1200RTH	120 / 240	200

GE INDUSTRIAL TLM2020CCU 1-PHASE 3-WIRE CONVERTIBLE MAIN LUG LOAD CENTER

- 40 Circuits
- NEMA 1 PowerMark



ITEM #	AMPS	VOLTS	COLOR
TLM2020CCU	200	120 / 240	Gold



GE INDUSTRIAL TLM2412CCU 1-PHASE 3-WIRE CONVERTIBLE MAIN LUG LOAD CENTER

- 24 Circuits
- NEMA 1 PowerMark



ITEM #	AMPS	VOLTS	COLOR
TLM2412CCU	125	120 / 240	Gold



GE INDUSTRIAL TLM3220CCU 200A 32-SPACE 40-CIRCUIT MAIN LUG LOAD CENTER

- 40 Circuits
- NEMA 1 PowerMark



ITEM #	AMPS	VOLTS
TLM3220CCU	200	120 / 240



SQUARE D SC2040M200C 200 AMP 20-SPACE 40-CIRCUIT OUTDOOR RING TYPE MAIN BREAKER METER COMBO

- Outdoor
- ANSI Certified, UL Listed



ITEM #	VOLTS	AMPS
SC2040M200C	120 / 240	200



METERS



ACLARA 727X200001 I-210+ 60 HZ 240V SINGLE PHASE METER

RESIDENTIAL GRADE

- Single Phase
- Utility Revenue Meter
- ANSI Approved



ITEM #	VOLTS
727X200001	240



ACLARA DEMAND FM16S 120-480V METER

UTILITY GRADE

- Service Voltages: 120/208Y or 277/480 or 120/240
- Socket Required: 7 Terminal 200 200 Amp



ITEM #	AMPS
78AX400047	320
KV2CE	200

METER SOCKETS

MILBANK 4 TERMINAL TRIPLEX GROUND RINGLESS METER SOCKET

OVERHEAD OR UNDERGROUND ENTRY

- Standard: UL Listed; Type 3R
- Voltage Rating: 600 VAC
- Phase: 1 Phase
- Frequency Rating: 60 Hz



ITEM #	AMPS
UAP7040	200
UAP8435-XL-TG-HSP	125

SIEMENS TALON 320A OH/UG ALUMINUM ENCLOSURE METER

OVERHEAD OR UNDERGROUND ENTRY

- IP/NEMA Rating: 3R
- Type: Meter Base
- Certification: UL



ITEM #	VOLTS
41105-02FL	600
49107-02FL	120 / 240

MIDWEST M075C010 100A METERED POWER OUTLET

- 50A/30A/20A Receptacles/Breakers
- Ring Type Surface Mount



ITEM #	VOLTS
M075C010	120 / 240

ZONE MASTER ZM11201 SURGE PROTECTION DEVICE

COMMERCIAL / RESIDENTIAL GRADE

- Replaceable Bolt-In Modules
- Thermal / Short Circuit Fusing
- 15 Year Warranty



ITEM #	VOLTS	AMPS
ZM11201	120/208-3PH-4WW	200A-400A

SQUARE D SDSA1175T SURGE PROTECTION DEVICE 36KA 120 VAC 1 PHASE 3 WIRE 25KA SCCR NEMA 1

- Range: Surgologic
- 1 Phase / 3-Wire
- EU RoHS Directive Compliant



ITEM #	VOLTS	SURGE
SDSA1175T	120V	36 kA

SQUARE D B125 1-1/4 IN. BOLT-ON HUB FOR DEVICES WITH B OPENINGS

- Hub
- ANSI Certified
- UL listed
- CSA listed



ITEM #	MOUNTING TYPE	COLOR
B125	Bolt On	Silver

SQUARE D QOM2200VH MAIN BREAKER 200A 2 POLE 120/240 VAC

- Standard Trip
- Plug-In Mount
- UL Listed



ITEM #	VOLTS	AMPS
QOM2200VH	120V/240V	200-225

SQUARE D QOC24UF COVER, QO, LOAD CENTER, 24 CIRCUITS, FLUSH COVER

INDOOR LOAD CENTER

- ANSI-Certified
- UL Listed



ITEM #	SPACES	SURFACE FINISH
QOC24UF	24	Baked Enamel Grey

SQUARE D EJB34070 70A 480V/277V 3-POLE MOLDED CASE MINIATURE CIRCUIT BREAKER

- 3 Phases
- Bolt-on Connection



ITEM #	VOLTS	AMPS
EJB34070	480/277	70A

SQUARE D AMP 2-POLE CIRCUIT BREAKER

COMMERCIAL GRADE

- 120/240V
- Trip Indicator
- Plug-on design



ITEM #	MAX AMPS	COLOR
QO250	50	Black
QO260	60	Black
QO2125	125	Black

SQUARE D RC816F200C HOMELINE 200-AMP MAIN BREAKER 8-SPACE 16-CIRCUIT

- Ringless Socket
- Surface Mounting
- 8 Spaces
- 16 Circuits
- 8 Tandem Breakers
- Hub type: A
- No Bypass
- UL E-6294 Listed



ITEM #	VOLTS	AMPS
RC816F200S	480/277	200A

UTILITY ELBOWS

ELASTIMOLD 162LR-B-5240 15KV 200 AMP, LOADBREAK ELBOW CONNECTOR

- Connection Type: Push-In
- EPDM Rubber
- ANSI/IEEE Standard 386



ITEM #	AMPS	VOLTS
162LR-B-5240	200A	15kV
162LR-B5220	200A	15kV
162LR-B-2230	200A	15kV
162LR-B-2240	200A	15kV
162LR-B-2250	200A	15kV

FUSES

COOPER BUSSMANN 600V TIME DELAY DUAL ELEMENT FUSE

- Time Delay Power Fuse
- Terminal Type: Ferrule
- Interrupt rating: 200 kAIC



ITEM #	FUSE AMPS	VOLTAGE
A ECSR15	15A	600 VAC
B ECSR20	20A	600 VAC
C ECSR25	25A	600 VAC
D ECSR30	30A	600 VAC



COOPER BUSSMANN HLR-2A 15A 300V CARTRIDGE FUSE HOLDER

- Holder Terminals: Wire Ledged
- No. of Fuses: 1Fuses
- Product Range: HLR Series
- Voltage Rating VAC: 300V

ITEM #	VOLTS	AMPS
HLR-2A	300V	15A

WIRING DEVICES | MISC.

MILBANK U3802 60A NON-FUSED AC DISCONNECT

- Nonfusible
- Can be used with motion sensors



ITEM #	AMPS
U3802	60A

ATLANTIC AI ACD30NF 30 AMP NON-FUSIBLE A/C DISCONNECT SWITCH

OUTDOOR USE / RAINPROOF


- Removable Cover
- Type 3R Enclosure
- Snap-In Dead Front
- Lockable



ITEM #	VOLTS	AMPS
AI ACD30NF	240V	30A

GENERAL ELECTRIC CR306E002 AC NON REVERSING MAGNETIC STARTER

- NEMA Size: 3
- Open Style
- AC Non-Reversing



ITEM #	VOLTS	AMPS
CR306E002	600V Max	90A

LEX POWERHOUSE DB100NP-ABB-S3 100 AMP 3 PHASE PAGODA 15 DUPLEX RECEPTACLES, WEATHER RESISTANT

WEATHER RESISTANT

- NEMA 3R
- 2 Pole
- 3 Wire
- Duplex Receptacles



ITEM #	VOLTS	AMPS
DB100NP-ABB-S3	125V	20A

EATON PC50A GFCI PRO-GRIP 50A EXTENSION CORD

INDOOR LOAD CENTER

- California Style
- 6/4 Flexible UL Extension Cord
- NAFTA
- cULus



ITEM #	VOLTS	AMPS
PC50A	125/250V	50A

LIGHTING MAGNETIC CONTACTOR, 120V AC COIL VOLTS, CONTACTOR TYPE: ELECTRICALLY HELD

- 6 Poles
- Electrically Held
- NEMA Rating: 1

VOLTS	AMPS
120V AC	30A

EATON RHINOBOX 120/240V 50A POWER DISTRIBUTION UNIT

WEATHERPROOF

- DUPX ManRes
- NEMA Type: 3
- cETLus, NOM





ITEM #	VOLTS	AMPS	COLOR
RB300M	120/240V	50A	Red
RB300ME	120/240V	50A	Yellow

MORRIS ABOVE GROUND INSULATION SELF-PIERCING CONNECTORS

- One Port
- 1/2 Bolt Head Size
- Energized Circuits



ITEM #	TORQUE IN-LB.	MAIN RANGE	TAP RANGE
96102	80	2/0-6	8-14
96104	80	750-3/0	10-14
96106	80	1/0-8	2-10
96108	125	4/0-3	2-10
96110	125	1/0-3	1/0-8
96114	160	4/0-2	4/0-4

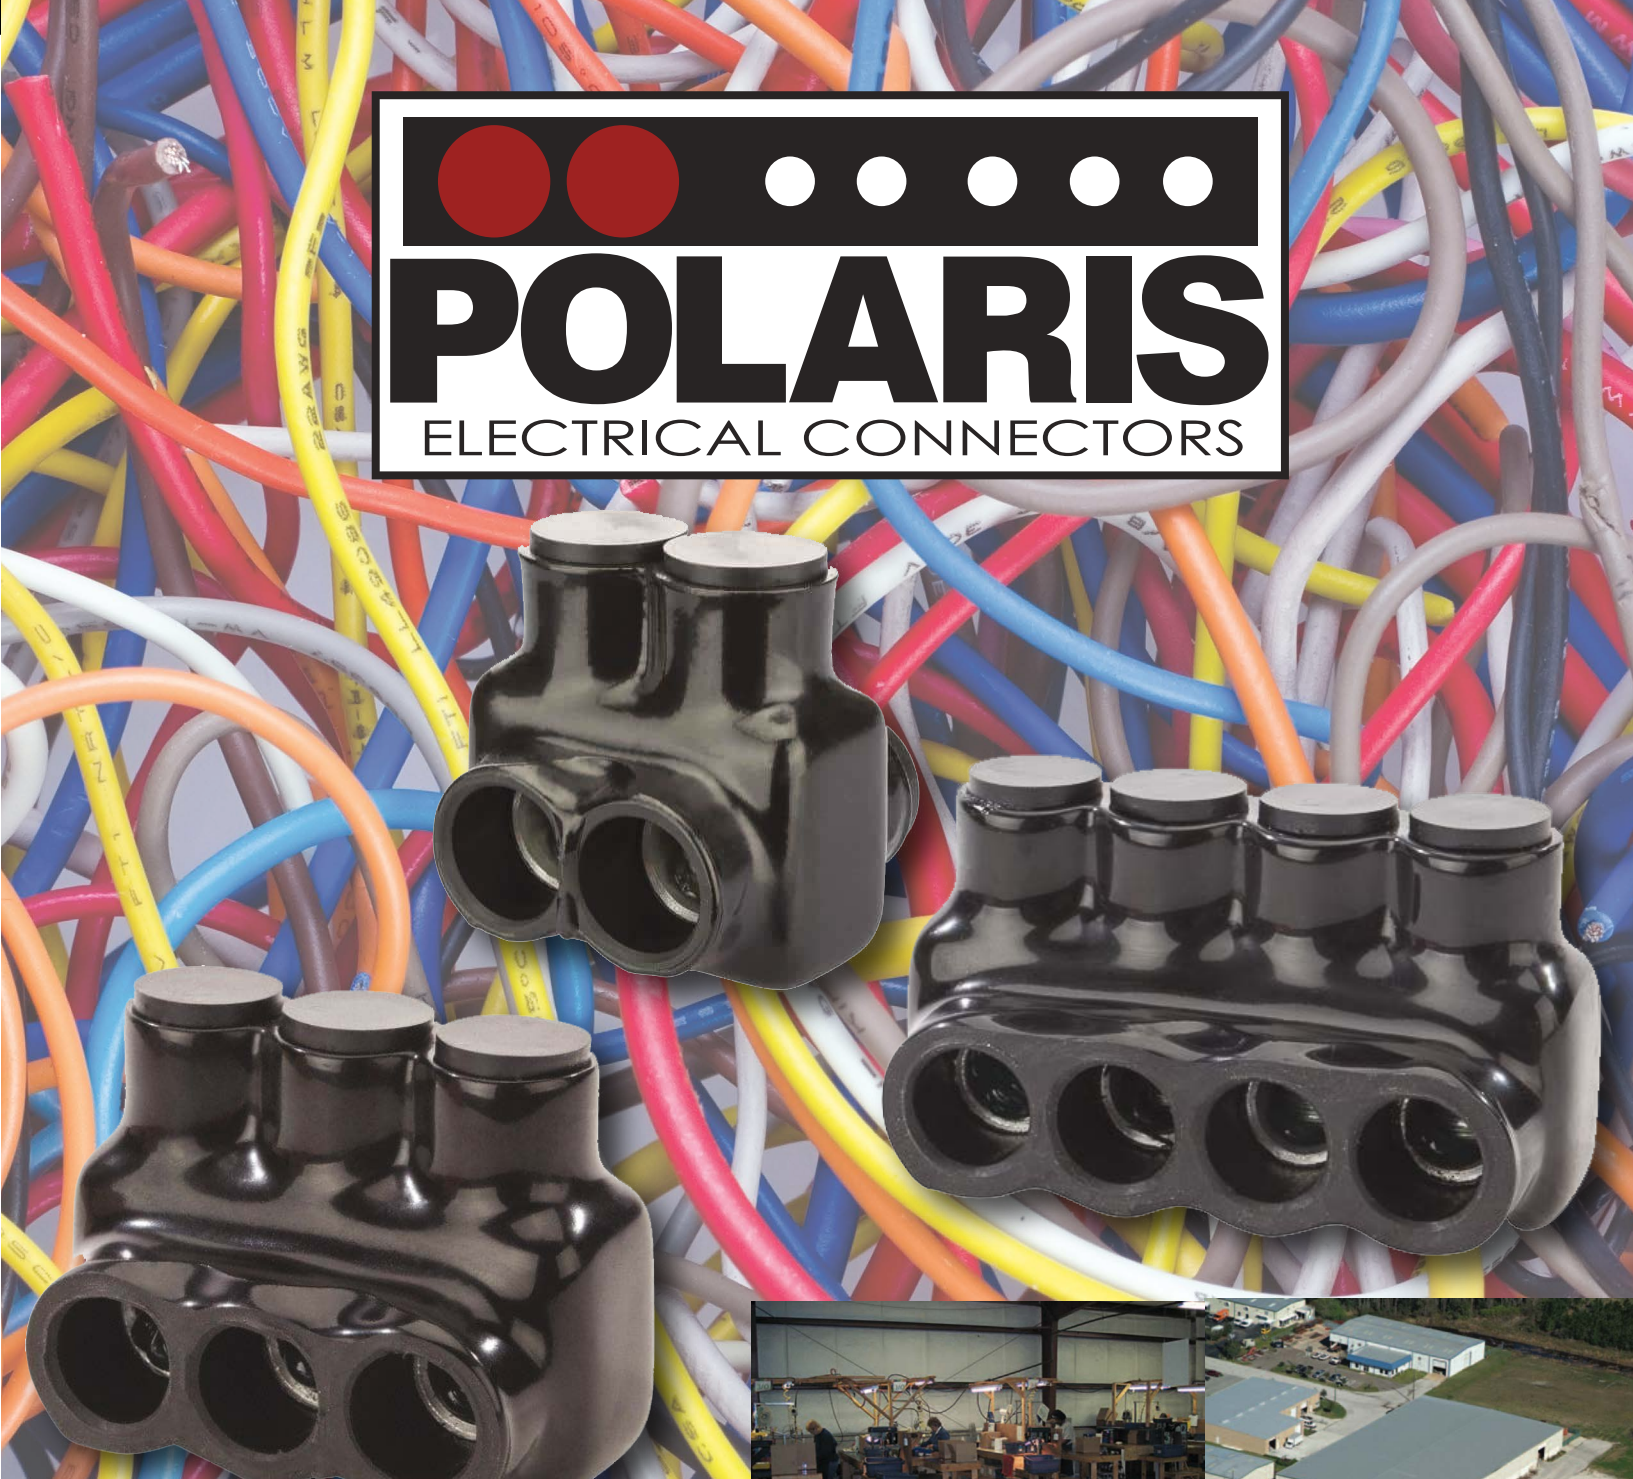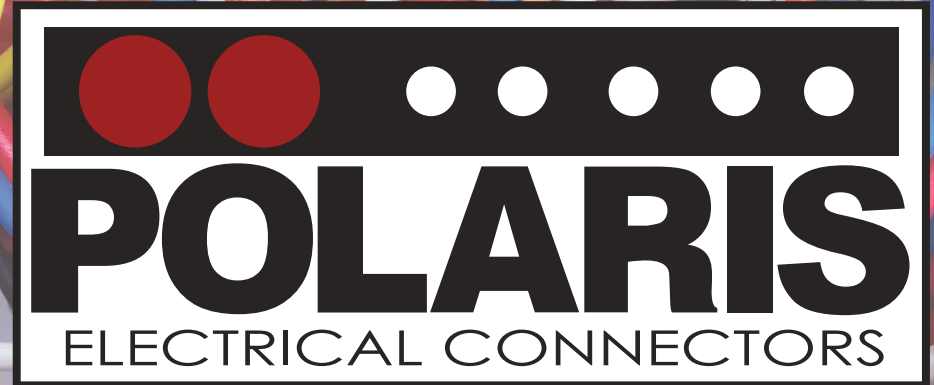

Polaris Connectors operates a 50,000 sq. ft. modern manufacturing facility located in Odessa, Florida. In this facility, we manufacture dual rated (Aluminum and Copper) electrical connectors, neutral bars, box connectors, and insulated block connectors to fit any customer application.

All manufacturing tooling and equipment are developed in house to give us complete flexibility and insure product quality when dealing with special customer needs which may require us to custom make an item.

polarisconnectors.com

1-877-584-LUGS (5847)

info@polarisconnectors.com

Odessa, Fl.

TENON ADAPTER 1 FIXTURE

- Use with 24/16/12 inch floodlight fixtures
- Constructed of Aluminum Tubing & Stainless Steel Hardware
- Super Durable Polyester Powder Coat Finish



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
TH190	2 3/8 in.	1 at 90°

TENON ADAPTER 3 FIXTURE

- Use with 24/16/12/9 inch floodlight fixtures
- Constructed of Aluminum Tubing & Stainless Steel Hardware
- Super Durable Polyester Powder Coat Finish



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
TH390	2 3/8 in.	3 at 90°

TENON ADAPTER 1 FIXTURE

- Use with 24/16/12 inch floodlight fixtures
- Constructed of Aluminum Tubing & Stainless Steel Hardware
- Super Durable Polyester Powder Coat Finish



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
TH290	2 3/8 in.	2 at 90°

TENON ADAPTER 3 FIXTURE

- Use with 24/16/12/9 inch floodlight fixtures
- Constructed of Aluminum Tubing & Stainless Steel Hardware
- Super Durable Polyester Powder Coat Finish



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
TH3120	2 3/8 in.	3 at 120°

HORIZONTAL TENON ADAPTER 2 FIXTURE

- Use with 24/16/12 inch floodlight fixtures
- Constructed of Aluminum Tubing & Stainless Steel Hardware
- Super Durable Polyester Powder Coat Finish



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
TH2180	2 3/8 in.	2 at 180°

TENON ADAPTER 4 FIXTURE

- Use with 24/16/12/9 inch floodlight fixtures
- Constructed of Aluminum Tubing & Stainless Steel Hardware
- Super Durable Polyester Powder Coat Finish



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
TH490	2 3/8 in.	4 at 90°

3" SQUARE POLE TOP MOUNT ADAPTER

- Adapts an existing straight square or round pole
- Constructed of Steel Tubing & Stainless Steel Hardware



ITEM #	POLE SIZE	FIXTURE MOUNT
TVA3	3 in.	Single Fixture

4" SQUARE POLE TOP MOUNT ADAPTER

- Adapts an existing straight square or round pole
- Constructed of Steel Tubing & Stainless Steel Hardware



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
TVA4	2 3/8 in.	Single Fixture

5" SQUARE POLE TOP MOUNT ADAPTER

- Adapts an existing straight square or round pole
- Constructed of Steel Tubing & Stainless Steel Hardware



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
TVA5	2 3/8 in.	Single Fixture

6" SQUARE POLE TOP MOUNT ADAPTER

- Adapts an existing straight square or round pole
- Constructed of Steel Tubing & Stainless Steel Hardware



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
TVA6	2 3/8 in.	Single Fixture

3" ROUND POLE TOP MOUNT ADAPTER

- Round to Vertical Tenon Mount
- Constructed of Steel Tubing & Stainless Steel Hardware



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
TVAR3	2 3/8 in.	Single Fixture

3.5" ROUND POLE TOP MOUNT ADAPTER

- Round to Vertical Tenon Mount
- Constructed of Steel Tubing & Stainless Steel Hardware



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
TR-35-2DB	2 3/8 in.	Single Fixture

4" ROUND POLE TOP MOUNT ADAPTER

- Round to Vertical Tenon Mount
- Constructed of Steel Tubing & Stainless Steel Hardware



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
TVAR4	2 3/8 in.	Single Fixture

5" ROUND POLE TOP MOUNT ADAPTER

- Round to Vertical Tenon Mount
- Constructed of Steel Tubing & Stainless Steel Hardware



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
TVAR5	2 3/8 in.	Single Fixture

1 FIXTURE ROUND POLE MOUNT

- Welded Steel Construction
- Bronze Color



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
RTB1	2 3/8 in.	1

2 FIXTURE ROUND POLE MOUNT

- Welded Steel Construction
- Bronze Color



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
RTB2	2 3/8 in.	2 at 180°

3 FIXTURE ROUND POLE MOUNT

- Welded Steel Construction
- Bronze Color



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
RTB3	2 3/8 in.	3 at 120°

4 FIXTURE ROUND POLE MOUNT

- Welded Steel Construction
- Bronze Color



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
RTB4	2 3/8 in.	4 at 90°

6" ROUND POLE TOP MOUNT ADAPTER

- Round to Vertical Tenon Mount
- Constructed of Steel Tubing & Stainless Steel Hardware



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
TVAR6	2 3/8 in.	Single Fixture

ALUMINUM TAPERED ELLIPTICAL BRACKET FOR WOOD POLE MOUNTING

- Used for Wood Pole Mounting
- Rise: 24 in.



ITEM #	SIZE	PIPE SIZE	WT.
B200A080	2x8ft.	2 in.	19lbs

POLE MOUNTING | BULLHORN BRACKETS



BH2 DOUBLE 180°

- Use with 24/16/12/9 in. floodlight fixtures
- Bronze Finish



BH3 TRIPLE 180°

- Supplied with 3-set screws for mounting
- Bronze Finish



BH3C TRIPLE 180°

- Use with 24/16/12/9 in. floodlight fixtures
- Bronze Finish



BH4 QUAD 180°

- Use with 24/16/12/9 in. floodlight fixtures
- Bronze Finish



ITEM #	BH2	BH3	BH3C	BH4
SLIPFITTER SIZE	2 3/8 in.	2 3/8 in.	2 3/8 in.	2 3/8 in.
FIXTURE MOUNT	2 @ 180°	3 @ 180°	3 @ 120°	4 @ 180°



BH4C QUAD 90°

- Use with 24/16/12 inch floodlight fixtures
- Bronze Finish



DRAB DOUBLE RIGHT ANGLE BRACKET WALL MOUNT 180°

- Bronze Finish



TV2 TENON ADAPTER 2 FIXTURE

- Use with 24/16/12/9 in. floodlight fixtures



TV3 TENON ADAPTER 3 FIXTURE

- Use with 24/16/12/9 in. floodlight fixtures



ITEM #	BH4C	DRAB	TV2	TV3
SLIPFITTER SIZE	2 3/8 in.	2 3/8 in.	2 3/8 in.	2 3/8 in.
FIXTURE MOUNT	4 @ 90°	2 @ 180°	3 Fixtures	3 Fixtures



TENON ADAPTER 2 FIXTURE RV2

- Use with 24/16/12 inch floodlight fixtures



TENON ADAPTER 3 FIXTURE RV3

- Use with 24/16/12 inch floodlight fixtures



TENON ADAPTER 3 FIXTURE RV3120

- Use with 24/16/12 inch floodlight fixtures



TENON ADAPTER 4 FIXTURE RVC4

- Use with 24/16/12 inch floodlight fixtures



ITEM #	RV2	RV3	RV3120	BH4
SLIPFITTER SIZE	2 3/8 in.	2 3/8 in.	2 3/8 in.	2 3/8 in.
FIXTURE MOUNT	2 Fixtures	3 Fixtures	3 @ 120°	4 @ 180°

WALL MOUNT HORIZONTAL WMH

- Wall to Horizontal Tenon Mount
- Welded Aluminum
- Bronze Color



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
WHM	2 3/8 in.	Single Fixture

HORIZONTAL POLE MOUNT PMH

- Round to Vertical Tenon Mount
- Durable Polyester Powder Coat Finish



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
PMH	2 3/8 in.	Single Fixture

ACC-WM2 WALL MOUNT BRACKET

- Wall Mount Bracket
- Bronze Finish
- Weather Resistant Polyester Powder



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
AAC-WM2	2 3/8 in.	Single Fixture

POLE MOUNT VERTICAL PMV

- Pole to Tenon Mount
- Welded Aluminum



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
PMV	2 3/8 in.	Single Fixture

POLE MOUNTING | RIGHT ANGLE BRACKETS & MISCELLANEOUS BRACKETS

WALL/WOOD POLE TENON MOUNT ADAPTER WWPM-T


- Utilizes an Adjustable Slip Fitter
- Durable Polyester Powder Coat Finish



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
WWPM-T	2 3/8 in.	Single Fixture

ACC-WM3 WALL MOUNT BRACKET 90° 2" TENON

- Welded Steel Construction
- Bronze Color



ITEM #	SLIPFITTER SIZE	FIXTURE MOUNT
ACC-WM3	2 3/8 in.	Single Fixture



CUSTOM LIGHT POLES

Contact us at
1-888-414-0872
about getting your made to order light poles made.

LET US CUSTOMIZE YOUR LIGHT POLES TO FIT YOUR NEEDS USING SUPPLIES FROM:




MADE TO ORDER



LOREN COOK RESTROOM EXHAUST FAN

- Gemini fans provide maximum performance, durability, and ease of installation in a wide variety of ceiling (GC) and inline (GN) clean air exhaust applications.
- Made in the USA in an ISO 9001 Certified Factory

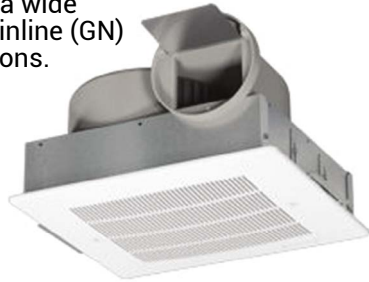

GREENHECK SP-B90 LOW PROFILE BATHROOM EXHAUST FAN 1PH, 57-104 CFM

- Uses 70% Less Energy than a Standard Fan
- Direct Drive
- Controllable Speed



ITEM #	HERTZ	VOLTS	RPM
SP-B90	60	115V	900

LOREN COOK GC622 RESTROOM EXHAUST FAN

- Replacement For Old Gemini Part # 5-15



ITEM #	CFM	RFM	MAX WATTS
GC622	428	960	233

CANARM SD08 2 SPEED EXHAUST FAN W/ CORD & PLUG 8 INCH

- Smooth, quiet, reliable and maintenance-free operations
- 2-Speed Fan with High Efficiency



ITEM #	VOLTS	FINISH
SD08	115V	Grey Powder Coat Finish

CANARM SD10 10-IN. TWO SPEED SHUTTER MOUNTED EXHAUST FAN

- Two Speed Shutter Mounted Exhaust Fan
- Recommended Use: Attic



ITEM #	VOLTS	WATTS
SD10	110-120V	60

DYSON AIRBLADE HU03 HAND DRYER, STAINLESS STEEL

- Sheets of air travelling at 388mph follow the contours of your hands – scraping water from the surface in 10 seconds in Max mode.
- Max: 900W or Eco: 650W
- HEPA filter captures 99.7% of particles, including bacteria and viruses.



ITEM #	VOLTS	AMPS
HU03-LV	Low: 110-120V	20A
HU03-HV	High: 208-240V	20A

EXCEL DRYER XLERATOR® HAND DRYER - BRUSHED STAINLESS STEEL HIGH SPEED AUTOMATIC SURFACE-MOUNTED

- Drying Time: 8-12 seconds
- Brushed Stainless steel Exterior
- Adjustable Speed and Sound Controller
- Adjustable (LOW/MEDIUM/HIGH/OFF) Heating Element



ITEM #	VOLTS	AMPS	WATTS
XL-SB	110-120V	11.3-12.2A	1240-1450W
XL-SVB	208-240V	5.6-6.2A	1160-1490W

EXCEL R76-W HANDS-ON PUSH-BUTTON RECESSED WHITE METAL HAND DRYER

- Semi-Recessed
- Cover: One-Piece of Rib-Reinforced, Die-Cast Zinc Alloy
- Push-Button Operation
- Brushless Motor for Power & Long Life



ITEM #	VOLTS	AMPS	WATTS
R76-W	110/120V	20A	2300W

EXCEL 76-W HAND DRYER WHITE EPOXY ON ZINC ALLOY PUSH-BUTTON SURFACE-MOUNTED

- Rotating Air Nozzle
- Time Cycle: 30 Seconds
- White Epoxy Paint, Chrome Plated
- Push-Button Operation



	VOLTS	AMPS	HERTZ
A	110-120V	15 or 20A	60Hz
B	208-240V	10A	60Hz
C	277V	8A	60Hz

DYSON AIRBLADE SERIES HAND DRYER

- Available Hertz: 50 Hz & 60 Hz
- Dries Hands in 12 Seconds



ITEM #	VOLTS	AMPS	COLOR
HU02-W	110-127V 200-240V	8.33A 5A	Brushed Nickel
HU02-N	110-127V 200-240V	8.33A 5A	Sprayed White

EXCEL HO-IW CAST SERIES HANDS OFF AUTOMATIC HAND DRYER

- Fully Automated with Infrared Sensor
- Surface or Recessed Wall Mounting
- White Epoxy, Painted



ITEM #	VOLTS	AMPS	COLOR
HO-IW	110/120V	15/20A	White



Satco is a leading supplier of lighting products, with solutions for nearly every lighting market across the commercial, residential and industrial landscape. With over 1.5 million square feet of inventory throughout North America, and thousands of products ranging from light bulbs and LED technologies to decorative fixtures, smart lighting and even lighting components, Satco® is the single resource for all of your lighting needs. We do the LIGHT thing.™

www.satco.com

New York Executive Offices & Warehouse
110 Heartland Blvd
Brentwood, NY 11717

DAHUA EPOE IP BULLET IR VARI-FOCAL CAMERA

- True Wide Dynamic Range
- True Day/Night IR Cut filter
- IP67 Ingress Protection
- Able to Operate in Extreme Temperatures
- Color Supported: Color, Monochrome
- HD Recording



ITEM #	EFFECTIVE CAM RES.
VD-N85CB5Z	8 Megapixel
VD-N45CB5Z	4 Megapixel

DAHUA VD-N44CL52 4MP IR MINI DOME CAMERA

- Progressive-Scan Imager with a Fixed Lens
- True Wide Dynamic Range
- True Day/Night IR Cut Filter
- IP67 Ingress Protection
- Able to Operate in Extreme Temperatures
- Color Supported: Color, Monochrome
- HD Recording



ITEM #	EFFECTIVE CAM RES.
VD-N44CL52	4 Megapixel

DAHUA VD-A0832A 4K/32CH/2U/NVR/8SATA/NO-HDD 32 CHANNEL RECORDING DEVICE

- Wired
- Network Video Recorder



ITEM #	VIDEO FORMATS
VD-N44CL52	H.264, H.265, Motion JPEG

DAHUA VD-N52B3P4 EPOE NVR 4K 2 SATA 16 CHANNEL VIDEO SURVEILLANCE STATION

- Maximum 320 Mbps Incoming Bandwidth
- Up to 12 MP Resolution for Preview & Playback



ITEM #	VIDEO FORMATS
VD-N52B3PR	H.264, H.265+

DAHUA N568D124S 12 4K DOME NETWORK CAMERAS WITH 1 16-CHANNEL 4K NVR

- Dual Stream Encoding
- Maximum 320 Mbps Incoming Bandwidth



ITEM #	VIDEO FORMATS
N568D124S	H.265+ & H.264 Dual Codecs

DAHUA TPE-TG160G 16-PORT GIGABIT POE+ SWITCH

- Contains Unmanaged PoE+ Switches Deliver up to 30W per Port of PoE Power
- Only Requires One Set of Cables to Deliver Both Data & Power



ITEM #	INPUT
TPE-TG160G	100 – 240V AC, 50/60Hz, Internal Power Supply

DAHUA VD-N82AL32 8MP 2.8MM STARLIGHT DOME CAMERA

- Smart H.265+ Video Compression
- High-Resolution Video
- Dual Stream Encoding



ITEM #	EFFECTIVE CAM RES.
VD-N82AL32	8 Megapixel

SEAGATE G8-ST8000VXA SKYHAWK 3.5 8TB HARD DRIVE

- Optimised for DVRs and NVRs
- Tuned for 24x7 Workloads in Capacities up to 10TB
- ImagePerfect™ Firmware



ITEM #	STORAGE CAPACITY
G8-ST8000VXA	8TB

LEX PRM2 30 AMP 2RU ENCLOSED RACK RECEPTACLES

- Environmental Rating: NEMA Type 1 (Indoor Use)
- Feed Thru: Yes
- Main Breaker: None



LEX

ITEM #	RECEPTACLES	VAC
PRM2IN-9CC	L21-30 TO DUPLEX	120/208Y VAC
PRM2IN-1CC12GN	L21-30 TO POWERCON®	120/208Y VAC
PRM2IC-9CC	L5-30 TO DUPLEX	125 VAC
PRM2IJ-5CC2DC	L14-30 TO L5-30	125/250 VAC
PRM2IJ-3CC4DC	L14-30 TO L5-30/DUPLEX	125/250 VAC
PRM2IN-7CC	L21-30 TO DUPLEX	120/208Y VAC
PRM2IN-5CC2DC	L21-30 TO L5-30/DUPLEX	120/208Y VAC
PRM2IN-3CC4DC	L14-30 TO L5-30/DUPLEX	120/208Y VAC

LEX PGI12G POWER INPUT PANEL

- Environmental Rating: NEMA Type 3R (Outdoor Use)
- Feed Thru: None
- Overcurrent Protection: None
- 4-Pole, 5-Wire



LEX

ITEM #	AMPS	VAC
PGI12G-GWBRB-GKS	1200 AMPS	120/208Y VAC
PGI12G-GWBOY-GKS	1200 AMPS	277/480 VAC
PGI16G-GWBRB-GKS	1600 AMPS	125/250 VAC
PGI16G-GWBOY-GKS	1600 AMPS	277/480 VAC

LEX PRM3KN-9CC 50 AMP 3RU ENCLOSED RACK, 50 AMP LOCKING INLET TO DUPLEX RECEPTACLES

- Enclosure Type: Rack Mount Box
- Feed Thru: Yes
- Main Breaker: None



LEX

ITEM #	RECEPTACLE	VAC
PRM3KN-9CC	Straight Blade	125/250 VAC

LEX PRMM18Q-2MR8U-X-LV 400 AMP "PRESIDENTIAL" POWERRACK™ TO 19-PIN/L21-30/DUPLEX RECEPTACLES

- Environmental Rating: NEMA Type 1 (Indoor Use)
- Feed Thru: Yes
- Main Breaker: None



LEX

ITEM #	RECEPTACLE	VAC
PRMM18Q-2MR8U-X-LV	Straight Blade	120/208 VAC

LEX PRM3IN 30 AMP 3RU ENCLOSED RACK RECEPTACLES

- 120/208Y VAC
- Environmental Rating: NEMA Type 1 (Indoor Use)
- Feed Thru: Yes
- Main Breaker: None



LEX

ITEM #	RECEPTACLES
PRM3IN-3CC4DC	L21-30 TO L5-30/DUPLEX
PRM3IN-5CC2DC	L21-30 TO L5-30/DUPLEX
PRM3IN-1CC6DC	L21-30 TO L21-30/DUPLEX

LEX PRM1UN-8CA 20 AMP 1RU ENCLOSED RACK, POWERCON® TO DUPLEX RECEPTACLES

- Environmental Rating: NEMA Type 1 (Indoor Use)
- Feed Thru: Yes
- Main Breaker: (1) 100-250 Amp, 600 VAC triple-pole, adjustable electronic, branch-rated circuit breaker



LEX

ITEM #	RECEPTACLE	VAC
PRMK12D-MR4U-2LV	Straight Blade	120/208 VAC

LEX PRM1UN-8CA 20 AMP 1RU ENCLOSED RACK, POWERCON® TO DUPLEX RECEPTACLES

- Environmental Rating: NEMA Type 1 (Indoor Use)
- Feed Thru: Yes
- Main Breaker: None



LEX

ITEM #	AMPS	VAC
PRM1UN-8CA	20 AMPS	125 VAC

LEX PGI12G POWER INPUT PANEL

- Environmental Rating: NEMA Type 3R (Outdoor Use)
- 4-Pole, 5-Wire



LEX

ITEM #	AMPS	VAC
PGI04A-BRBWG-GKL	400 AMPS	120/208Y VAC
PGI04A-BOYWG-GKL	400 AMPS	277/480 VAC
PGI08A-BRBWG-GKL	800 AMPS	120/208Y VAC
PGI08A-BOYWG-GKL	800 AMPS	277/480 VAC

LEX PRM3 30 AMP 3RU ENCLOSED RACK RECEPTACLES

- Enclosure Type: Rack Mount Box
- Feed Thru: Yes
- Main Breaker: None



LEX

ITEM #	RECEPTACLES	VAC
PRM3IN-1CC12GN	L21-30 TO POWERCON®	120/208Y VAC
PRM3IN-9CC	L21-30 TO DUPLEX	120/208Y VAC
PRM3IJ-9CC	L14-30 TO DUPLEX	125/250 VAC

ADI RACKS NI-ER18U 18 UNIT EQUIPMENT RACK, ASSEMBLED

- Removable side panels
- Front and back locking doors with keys
- Tinted front glass door
- 2 easy to access wire channels



ADI

ITEM #	FANS	MATERIAL
NI-ER18U	2	Steel

TRIPP LITE TC-SRW9U SMARTRACK 9U LOW-PROFILE SWITCH-DEPTH WALL-MOUNT RACK ENCLOSURE CABINET

- Secures 9U of 19 in. rack equipment up to 16.5 in. deep
- Mounts to wall or rolls on floor
- RoHS Approved



TRIPP LITE

ITEM #	MAX. LOAD	MATERIAL
TC-SRW9U	200lbs	Steel

LUXUL XWR-3150 DUAL BAND WIRELESS AC3100 GIGABIT ROUTER WITH DOMOTZ & ROUTER LIMITS

- Roaming solved with Luxul Roam Assist™
- High power for extended signal range
- Built-in remote management (Domotz)
- Filter content and internet use with Router Limits



LUXUL

ITEM #	BEAMFORMING	PORTS
XWR-3150	2.4 & 5GHz	USB 3.0

TRIPP LITE TC-PDUMV2024 1.9KW SINGLE-PHASE METERED PDU, 120V OUTLETS, L5-20P/5-20P ADAPTER

- 6 NEMA 5-15/20R outlets
- PDU Type: Metered



TRIPP-LITE

ITEM #	FREQ. COMPATIBILITY	VOLTS	AMPS
TC-PDUMV2024	2.4 & 5GHz	120V	20A

W-BOX 0E-HDMISPL4 4K UHD HDMI SPLITTER

- 1:4 splitter for HDMI with Ultra HD 4K support that reliably distributes
- One HDMI source signal to four HDMI outputs.



WBOX TECHNOLOGIES

ITEM #	INPUT DCC SIGNAL	POWER SUPPLY
0E-HDMISPL4	5 volts p-p (TTL)	5V DC 1A

W-BOX 0E-40APM1337 13" - 37" FULL MOTION PIVOTING TV MOUNT

- Fits 13" - 37" TV's up to 40 lbs
- Easy-to-use
- Tilt, pan & swivel for maximum viewing flexibility



WBOX TECHNOLOGIES

ITEM #	BEAMFORMING	PORTS
XWR-3150	2.4 & 5GHz	USB 3.0

W-BOX 0E-28LED4K2 28" ULTRA HD 4K PRO-GRADE COLOR MONITOR, 3860 X 2160P 4K RESOLUTION

- 3860 x 2160P Full HD Resolution
- 28" Diagonal Viewing Size



WBOX TECHNOLOGIES

ITEM #	QUICK TOUCH SCALABILITY
0E-28LED4K2	16:9/4:3

W-BOX 0E-22LED2 22" FULL HD PRO-GRADE COLOR MONITOR, 1920 X 1080P

- Professional grade widescreen LED 21.5" color monitor
- Offers HDMI, VGA, & BNC inputs



WBOX TECHNOLOGIES

ITEM #	SIZE
0E-22LED2	21.5" Diagonal Viewing Size

W BOX 32LEDMON2 32IN FULL HD PRO-GRADE COLOR MONITOR


- Professional grade widescreen LED 31.5" color monitor
- Offers HDMI, VGA, & BNC inputs



WBOX TECHNOLOGIES

ITEM #	SIZE
0E-22LED2	21.5" Diagonal Viewing Size

ENERLITES®

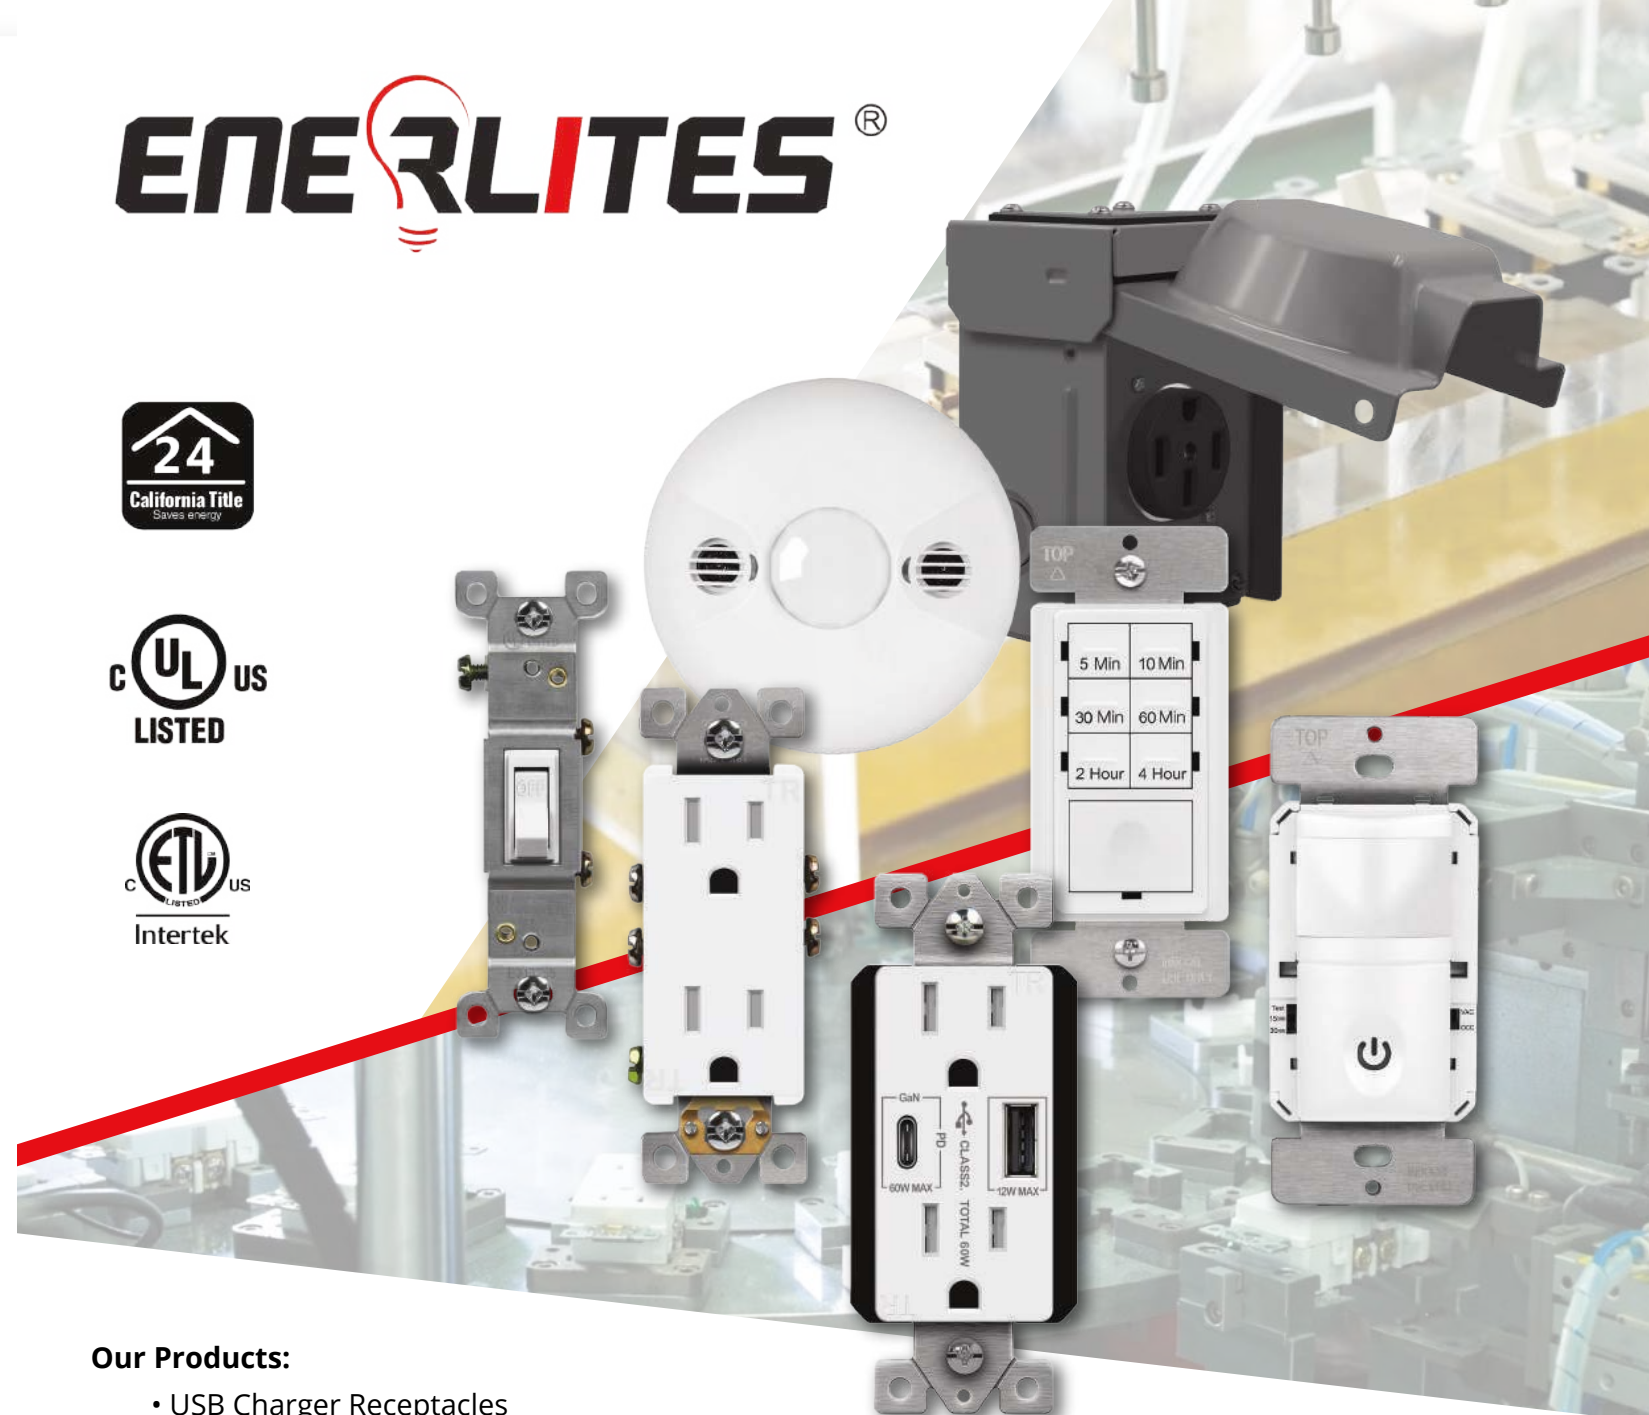

Our Products:

- USB Charger Receptacles
- Sensing Controls
- Plug Load Controls
- Timer Switches
- Dimmers/Fan Speed Controls
- Straight Blade Devices
- Switches
- Combination Devices
- Locking Devices
- Floor Boxes/Covers
- Data-Com Devices & Wall Plates
- Wall Plates/Covers
- Home Automation

Ratings:

- Residential Grade
- Commercial Grade
- Industrial Grade
- Hospital Grade

Visit www.enerlites.com or find us on social media!



New look coming soon!

Enerlites®

GENERAC 7042 22KW GUARDIAN HOME STANDBY GENERATOR WITH WI-FI

- 19.5 / 22 Kilowatt Guardian Series Standby Generator supplies your entire home during an outage



GENERAC		
ITEM #	RATED WATTS	VOLTAGE
7042	22kW LP/19.5 NG	120/240V Single Phase

GENERAC RG NATURAL GAS OR PROPANE STANDBY GENERATOR SINGLE PHASE

- Two Line LCD Multilingual Digital Evolution Controller
- External viewing window for easy indication of generator status and breaker position



GENERAC		
ITEM #	RATED WATTS	RATED AMPS
RG03224ANAX	32kW	133
RG04845ANAX	48kW	200

GENERAC 7209 GUARDIAN 24KW AUTOMATIC HOME STANDBY GENERATOR WI-FI ENABLED

- Takes up 70% less space when compared to competitive output products
- Engine Series: G-Force
- Material: Aluminum



GENERAC		
ITEM #	LIQUID PROPANE RATED WATTAGE	NATURAL GAS RATED WATTAGE
7209	24,000	1,000

GENERAC RD05033JDAL PROTECTOR DIESEL 50KW STANDBY GENERATOR 132GAL TANK SIZE

- UL/CUL 2200-listed
- External viewing window for easy inspection



GENERAC	
ITEM #	FUEL
RD05033JDAL	Diesel

GENERAC RG06024ANAX NATURAL GAS AUTOMATIC STANDBY GENERATOR, 120/240V SINGLE-PHASE

- Designed to withstand severe weather conditions
- Standards: CSA, cUL, EGSA, NEMA, UL
- Natural Gas



GENERAC		
ITEM #	STANDBY POWER RATING	VOLTAGE
RG06024ANAX	60kW	120V AC/240V AC 60 Hz

KOHLER 20RESC-QS10 20KW SINGLE-THREE PHASE LPG/NATURAL GAS GENERATOR

- Peak Motor Starting kVA @240 V: 41 kVA
- Certifications/ Listings: cUL|EPA|CSA|UL 2200



KOHLER				
ITEM #	RATED kW LP	RATED kW NG	AMPS LP	AMPS NG
20RESC-QS10	20kW	18kW	83A	75A

KOHLER STANDBY GENERATOR

- Restores power in as little as 10 seconds
- Application: Emergency Use, Job Site



KOHLER		
ITEM #	WATTS	RATED AMPS
24RCL-QS8	24,000W	133
38RCL-QS5	38,000W	200

KOHLER RCL-QS5 EMERGENCY STANDBY POWER GENERATOR WITH ALUMINUM ENCLOSURE

- Restores power in as little as 10 seconds



KOHLER		
ITEM #	WATTS	FREQUENCY
48RCL-QS5	48,000W	60 Hertz
60RCL-QS5	60,000W	50 Hz 60 Hz

WINCO PSS12H2W/F 12000W VAPOR-FUELED EMERGENCY STANDBY GENERATOR

- Voltage Regulation: Capacitor
- Fuel: LP/NG



WINCO GENERATORS				
ITEM #	WATTS LP	WATTS NG	AMPS LP	AMPS NG
PSS12H2W/F	1200W	10,000W	50A	341A

WINCO PSS20B2W/C 1700W VAPOR-FUELED EMERGENCY STANDBY GENERATOR

- Voltage Regulation: AVR (Automatic Voltage Regulator)
- Fuel: LP/NG



WINCO GENERATORS				
ITEM #	WATTS LP	WATTS NG	AMPS LP	AMPS NG
PSS20B2W/C	1700W	1500W	71A	62A

WINCO PSS/A POWER PAK LIQUID-COOLED VAPOR-FUELED EMERGENCY STANDBY GENERATOR

- Fuel: LP/NG
- Emissions: EPA Standby



WINCO GENERATORS				
ITEM #	WATTS LP	WATTS NG	AMPS LP	AMPS NG
PSS150/A	125,000W	150,000W	266A	188A
PSS600/A	500,000W	600,000W	751A	902A

WINCO PSS60/E POWER PAK LIQUID-COOLED VAPOR-FUELED EMERGENCY STANDBY GENERATOR


- Voltage Regulation: AVR (Automatic Voltage Regulator)
- Fuel: LP/NG



WINCO GENERATORS				
ITEM #	WATTS LP	WATTS NG	AMPS LP	AMPS NG
PSS60/E	60,000W	58,000W	90A	87A

GENERAC RXSW100A3 100 AMP SERVICE RATED 120/240 SINGLE PHASE NEMA 3R SMART TRANSFER SWITCH

- Mountable
- UL Listed

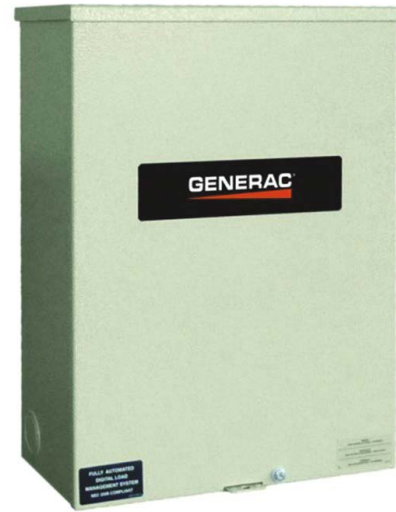

GENERAC

ITEM #	MAX. AMPS	MAX. WATTS	VOLTAGE
RXSW100A3	100A	10,000W	120/140V

GENERAC RXSW SERVICE RATED SERVICE RATE WHOLE HOUSE TRANSFER SWITCH

- Voltage: 120/240V Single Phase
- Enclosure: NEMA 3R Indoor/Outdoor
- UL Listed



GENERAC

ITEM #	MAX. AMPS
RXSW150A3	150A
RXSW200A3	200A

KOHLER RXT-JFNC-ASEQS AUTOMATIC TRANSFER SWITCH SERVICE RATED NEMA 3R

- Automatic Transfer Switch (ATS)
- Nema 3R Indoor/Outdoor



KOHLER.

ITEM #	AMPS	VOLTAGE
RXT-JFNC-100ASEQS4	100A	240V
RXT-JFNC-150ASEQS1	150A	120/240V
RXT-JFNC-200ASEQS4	200A	240V
RXT-JFNC-300ASEQS3	300A	240V
RXT-JFNC-400ASEQS3	400A	240V

ASCO J03ATSA20400FG0C AUTOMATIC TRANSFER SWITCH 400A 2-POLE 240V NEMA 1 ENCLOSURE

- Enclosure: NEMA 1
- Neutral: Solid Buss Bar



ASCO Power Technologies

ITEM #	AMPS	VOLTAGE
J03ATSA20400FG0C	400A	240V

ASCO AUTOMATIC TRANSFER SWITCH

- NEMA 1
- Phase 3



ASCO Power Technologies

ITEM #	AMPS	VOLTAGE
G03ATSA32000CG0C	200A	120/208A
G03ATSA31600CG0C	1600A	120/208A

ASCO 185 SERIES AUTOMATIC TRANSFER SWITCH


- Automatic Transfer Switch (ATS)
- UL 1008 Standard



ASCO Power Technologies

GENERAC RTSW400A3 SMART SWITCH SERVICE RATED AUTOMATIC GENERATOR TRANSFER SWITCH

- All-weather aluminum NEMA 3R enclosure
- UL Listed: UL1008

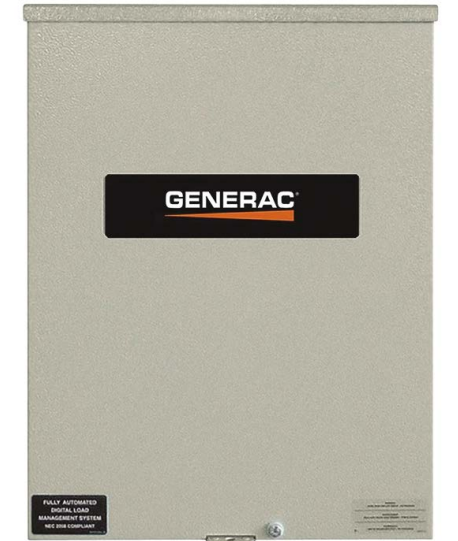

GENERAC

ITEM #	MAX. AMPS	VOLTAGE
RTSW400A3	400A	120/140A

ITEM #	AMPS	ENCLOSURE
97714-365	100A	NEMA 1 Non-SE Rated
97714-366	100A	NEMA 3R Non-SE Rated
97714-432	100A	NEMA 1 SE Rated
97714-433	100A	NEMA 3R SE Rated
97714-367	200A	NEMA 1 Non-SE Rated
97714-368	200A	NEMA 3R Non-SE Rated
97714-375	200A	NEMA 1 SE Rated
97714-376	200A	NEMA 3R SE Rated
97714-374	400A	NEMA 3R Non-SE Rated
97714-377	400A	NEMA 1 SE Rated
97714-378	400A	NEMA 3R SE Rated

GENERAC GP17500E PORTABLE GENERATOR 26,250 SURGE WATTS 17,500 RATED WATTS

- Reliable choice for home, job sites, or outdoor events
- Hour meter with maintenance resets
- Hardened steel tube cradle
- Sturdy, easy-grip handle
- Circuit breaker-protected outlets



GENERAC

ITEM #	SURGE/RATED WATTS	FUEL TYPE
GP17500E	26,000 / 17,500	Gasoline

WINCO W6000HE-03/A 6000W GAS-FUELED PORTABLE GENERATOR

- Reliable choice for any job site or for use at the home shop
- LED meter displays hours, RPMs, voltage, and frequency readings
- Fuel: Gasoline
- Emissions: CARB/California, EPA Prime



WINCO GENERATORS

ITEM #	STARTING/RUNNING WATTS	VOLTAGE OUTPUT
W6000HE-03/A	6000W / 5500W	120/240V Single Phase

WINCO W10000VE-03/A 10000W GAS-FUELED PORTABLE GENERATOR

- Reliable choice for the job site, agriculture, trailer/vehicle mounted, or even around the house
- Fuel: Gasoline
- Emissions: CARB/California, EPA Prime



WINCO GENERATORS

ITEM #	STARTING/RUNNING WATTS	VOLTAGE OUTPUT
W10000VE-03/A	10,000W / 9600W	120/240V Single Phase

WINCO WL12000HE-03/A-PKG 12000W GAS-FUELED PORTABLE GENERATOR PACKAGE

- The receptacle package on this unit includes our popular 50A twist lock plug
- Fuel: Gasoline
- Emissions: CSA, CARB/California, EPA Prime



WINCO GENERATORS

ITEM #	STARTING/RUNNING WATTS	VOLTAGE OUTPUT
WL12000HE-03/A-PKG	12,000W / 10,800W	120/240V Single Phase

WINCO WL18000VE-03/B 18000W GAS-FUELED PORTABLE GENERATOR

- Premium-grade Vanguard engines are application-engineered to power equipment that works for a living
- Fuel: Gasoline
- Emissions: EPA Prime



WINCO GENERATORS

ITEM #	STARTING/RUNNING WATTS	VOLTAGE OUTPUT
WL18000VE-03/B	18,000W / 16,500W	120/240V Single Phase

WINCO WL18000VE-03/A-PKG 18000W GAS-FUELED PORTABLE GENERATOR PACKAGE

- Second largest portable generator we have available
- Fuel: Gasoline
- Emissions: EPA Prime



WINCO GENERATORS

ITEM #	STARTING/RUNNING WATTS	VOLTAGE OUTPUT
WL18000VE-03/A-PKG	18,000W / 15,000W	120/240V Single Phase

WINCO WL22000VE/B 22000W GAS-FUELED PORTABLE GENERATOR

- Premium-grade Vanguard engines are application-engineered to power equipment that works for a living
- Fuel: Gasoline
- Emissions: EPA Prime



WINCO GENERATORS

ITEM #	STARTING/RUNNING WATTS	VOLTAGE OUTPUT
WL22000VE/B	22,000W / 19,000W	120/240V Single Phase

GENERAC 1000007848 4" HURRICANE GENPAD FOR 9-24KW AIR COOLED GENERATOR

- Engineered specifically to fit Generac's 2016+ 9-24kW air-cooled standby generators
- A composite of high strength fibers & cement



ITEM #	SIZE
1000007848	54"x31"x4" @ 275 lbs

GENERAC

GENERAC 1000005771 GENPAD COMPOSITE CEMENT PAD FOR GENERAC LIQUID-COOLED PROTECTOR GENERATORS

- Sturdy, Permanent Base For Liquid-Cooled Generators



ITEM #	COMPRESSION STRENGTH
1000005771	8000PSI

GENERAC

QWIKPRODUCTS QT8200 QWIKPAD FOR GENERATORS HURRICANE RATED UNIVERSAL PAD FOR AIR-COOLED STANDBY GENERATORS

- UV-Resistant, High-Durability Construction
- Fits Generac / Honeywell, Briggs & Stratton and Kohler



QwikProducts
by Mainstream Engineering

ITEM #	WEIGHT
QT8200	Unfilled: 44lbs Filled: 330lbs

RELIANCE CONTROLS PB TRANSFER SWITCH ACCESSORY

- Model Description: Power Inlet Box
- Cabinet Type, NEMA: Outdoor, NEMA 3R
- NEMA Configuration: L14-20



RELIANCE ELECTRIC

ITEM #	MAX. GENERATOR RUNNING WATTS	MAX. GENERATOR INPUT
PB20	5,000W	20A @ 125/250VAC
PB30	7,500W	30A @ 125/250VAC

HONEYWELL SK-5860 REMOTE ANNUNCIATOR

- 4 x 20 LCD remote annunciator used with Silent Knight addressable fire alarm control panels
- Light Gray finish
- UL listed



Honeywell	
ITEM #	FEEDBACK
SK-5860	Tactile & Audible

HONEYWELL ANN-80 80-CHARACTER LCD FIRE ANNUNCIATOR

- Compact, backlit, 80-character LCD fire annunciator that mimics the Fire Alarm Control Panel (FACP) display



Honeywell	
ITEM #	MOUNT
ANN-80	Semi-Flush

KIDDE 21026665 REMOTELYNC WIFI CAMERA FOR SMART HOME

- Base: 3M Command Tape™ for inside use
- Sensor: CMOS Color Sensor
- Video Sensor: Magnetic



Kidde		
ITEM #	LENS	COMPRESSION
21026665	Fixed focus, F# 2.0	H.264

HONEYWELL 41111104 16 AWG 1000FT UNSHIELDED FIRE ALARM CABLE REEL

- Conductors: 2 x solid bare copper
- Insulation: Polypropylene



Honeywell		
ITEM #	GAUGE	JACKET
41111104	16	PVC

SYSTON 6262-SP-RD-1000 1,000 FT. 16/2 RED SOLID UNSHIELDED CL3R/RISER SPOOL UL FIRE ALARM CABLE

- Features: UV Resistant
- Conductors: 2
- Total Length: 1000ft
- ETL Listed, UL Listed



SYSTON CABLE TECHNOLOGY		
ITEM #	GAUGE	CABLE/WIRE TYPE
6262-SP-RD-100	16	LOW VOLT.

SYSTON SP-RD-1000 1,000 FT. RED SOLID UNSHIELDED CL3R/RISER SPOOL UL FIRE ALARM CABLE

- Dry Location Use
- Total Length: 1000ft
- ETL Listed
- UL Listed



SYSTON CABLE TECHNOLOGY		
ITEM #	GAUGE	CABLE/WIRE TYPE
6462-SP-RD-1000	14	LOW VOLT.
6062-SP-RD-1000	18	COPPER

WEST PENN UNSHIELDED SOLID FIRE ALARM CABLE - 1000 FT

- Use With: audio circuits, control circuits, initiating circuits, and notification circuits.
- Solid ASTM Bare Copper
- UL-Listed



WestPenn Power A FirstEnergy Company		
ITEM #	AWG	COLOR
980-RED	18	RED
990-BLUE	16	BLUE
990-OR	16	ORANGE
990-RED	16	RED
990-WHT	16	WHITE
990-YE	16	YELLOW
60993B-OR	14	ORANGE

KIDDE 442020 RADON GAS DETECTION HOME TEST KIT


- Analyzes the amount of radon, a carcinogen, in your home with an EPA-registered facility.
- Includes activated radon sampler tray and return mailer envelope for professional lab analysis



Kidde
ITEM #
442020

KIDDE 442057 MOLD DETECTION KIT

- Attics and basements
- Kitchens and bathrooms
- Heating and air conditioning duct work
- Living and sleeping areas
- Boats and automobiles
- In and around pet areas
- Pools, utility, and storage areas

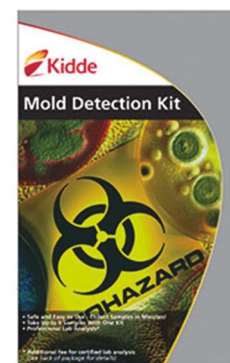

Kidde
ITEM #
442057

KIDDE KA-F2 AC PLUG-IN QUICK CONVERT ADAPTER

- For use with Kidde Firex® wire in smoke alarms



Kidde	
ITEM #	DIMENSIONS
KA-F2	1" x 1"

KIDDE HD135F 135°F 120V AC HEAT DETECTOR

- Temperature Range: -20F to +100F (-29C and +38C)
- Humidity Range: 5%-95% relative humidity (RH)
- Size: 5" in diameter x 2" depth



Kidde		
ITEM #	SENSOR	AUDIO ALARM
HD135F	HEAT	85dB @ 10ft

KIDDE SM120X SMOKE ALARM RELAY MODULE


- Can be used to activate auxiliary warning devices such as external bells and sirens, hallway or stairway lighting.



Kidde		
ITEM #	COLOR	FINISH
SM120X	Black	Wired

KIDDE CO120X CARBON MONOXIDE RELAY MODULE

- Can be used to activate auxiliary warning devices such as external bells and sirens, hallway or stairway lighting.



Kidde		
ITEM #	COLOR	POWER SOURCE
CO120X	Blue	Direct-Wired

KIDDE KA-B2 AC PLUG-IN QUICK CONVERT ADAPTER

- Quick convert adapter allows the installation of a new Kidde alarm to an existing competitive wiring harness



Kidde	
ITEM #	INPUT
KA-B2	1" x 1"

SPECTREX SHARPEYE 40/40C-L4B-642AFY7 INTEGRATED UV/IR FLAME DETECTOR

- Fast detection under five seconds
- Proven false alarm immunity
- SIL3 compatible



SPECTREX	
ITEM #	TEMP RANGE
40/40C-L4B-642AFY7	-40 to +185 °F

KIDDE PRO FIRE EXTINGUISHER

- Multipurpose Dry Chemical
- Supplied with wall hanger
- Suitable for use on most common fires



ITEM #	MODEL PRO	UL RATED
466112	5 MP	3-A, 40-B:C
466204	10 MP	4-A, 60-B:C

KIDDE PRO PLUS FIRE EXTINGUISHER

- Multipurpose Dry Chemical
- Supplied with wall hanger
- Suitable for use on most common fires



ITEM #	MODEL PRO	UL RATED
468001	5 MP	3-A, 40-B:C
468002	10 MP	4-A, 60-B:C

KIDDE RESSP KITCHEN FIRE EXTINGUISHER

- UL listed
- Sodium Bicarbonate
- Supplied with wall hanger



ITEM #	OPERATING PRESSURE	DISCHARGE TIME	DISCHARGE RANGE
RESSP	100psi	8-10sec.	5ft.

KIDDE FA110G MULTIPURPOSE HOME FIRE EXTINGUISHER

- UL Rated: 1-A,10-B:C
- Suitable for use on Class A (trash, wood & paper), Class B (liquids & gases) and Class C fires (energized electrical equipment).



ITEM #	OPERATING PRESSURE	DISCHARGE TIME	DISCHARGE RANGE
FA110G	100psi	8-12sec.	6-8ft.

KIDDE FA5B DISPOSABLE FIRE EXTINGUISHER

- UL rated 5-B:C
- Suitable for use on Class B (liquids & gases) and Class C fires (energized electrical equipment)



ITEM #	OPERATING PRESSURE	DISCHARGE TIME	DISCHARGE RANGE
FA5B	100psi	8-12sec.	4-6ft.

KIDDE FX210R LIVING AREA FIRE EXTINGUISHER

- UL rated 2-A, 10-B:C
- Fights fires common to the home living areas such as wood, fabrics, furnishings, and drapes.



ITEM #	OPERATING PRESSURE	DISCHARGE TIME	DISCHARGE RANGE
FX210R	195psi	13-15sec.	12-18ft.

KIDDE FX210R LIVING AREA FIRE EXTINGUISHER

- UL rated 2-A, 10-B:C
- Fights fires common to the home living areas such as wood, fabrics, furnishings, and drapes.



ITEM #	OPERATING PRESSURE	DISCHARGE TIME	DISCHARGE RANGE
FX210R	195psi	12-18sec.	12-18ft.

KIDDE 466206 PRO 20 MP FIRE EXTINGUISHER

- UL rated 6-A:80-B:C
- Suitable for use on Class A (trash, wood & paper), Class B (liquids & gases) and Class C fires (energized electrical equipment).



ITEM #	OPERATING PRESSURE	DISCHARGE TIME	DISCHARGE RANGE
466206	195psi	19-22sec.	20ft.

KIDDE 21005779 PRO 210 CONSUMER FIRE EXTINGUISHER

- UL rated 2-A, 10-B:C
- Suitable for use on Class A, Class B and Class C fires



ITEM #	OPERATING PRESSURE	DISCHARGE TIME	DISCHARGE RANGE
21005779	100psi	13-15sec.	10-15ft.

KIDDE 468000 PRO PLUS 2.5 MP FIRE EXTINGUISHER

- UL rated 1-A,10-B:C
- Suitable for use on Class A, Class B and Class C fires



ITEM #	OPERATING PRESSURE	DISCHARGE TIME	DISCHARGE RANGE
468000	195psi	8-12sec.	10-15ft.

KIDDE 468003 PRO PLUS 20 MP FIRE EXTINGUISHER

- UL rated 6-A, 120-B:C
- Suitable for use on Class A, Class B and Class C fires



ITEM #	OPERATING PRESSURE	DISCHARGE TIME	DISCHARGE RANGE
468003	195psi	26-28sec.	16-20ft.

KIDDE 466180 PRO 5 CO2 FIRE EXTINGUISHER

- Suitable for use on Class B (liquids) and Class C fires (energized electrical equipment)
- UL rated 5-B:C



ITEM #	OPERATING PRESSURE	DISCHARGE TIME	DISCHARGE RANGE
466180	185psi	7-9sec.	3-8ft.

KIDDE 466181 PRO 10 CD FIRE EXTINGUISHER

- Suitable for use on Class B (liquids) and Class C fires (energized electrical equipment)
- UL rated 10-B:C



ITEM #	OPERATING PRESSURE	DISCHARGE TIME	DISCHARGE RANGE
466181	185psi	8-10sec.	3-8ft.

KIDDE 466182 PRO 15 CD FIRE EXTINGUISHER

- Suitable for use on Class B (liquids) and Class C fires (energized electrical equipment)
- UL rated 10-B:C



ITEM #	OPERATING PRESSURE	DISCHARGE TIME	DISCHARGE RANGE
466182	850psi	12-14sec.	3-8ft.

KIDDE 466183 PRO 20 CD FIRE EXTINGUISHER

- Suitable for use on Class B (liquids) and Class C fires (energized electrical equipment)
- UL rated 10-B:C



ITEM #	OPERATING PRESSURE	DISCHARGE TIME	DISCHARGE RANGE
466183	850psi	15-17sec.	3-8ft.

KIDDE FX5 II DRY CHEMICAL FIRE EXTINGUISHER

- Fire Extinguisher & Dry Chemical
- UL Rating 5B:C



ITEM #	OPERATING PRESSURE	DISCHARGE TIME	EXTINGUISHER TYPE
FX5 II	100psi	8-12sec.	Dry Chemical

KIDDE 466403 PRO 2.5 WATER FIRE EXTINGUISHER

- Suitable for use on Class A (trash, wood & paper) fires



ITEM #	OPERATING PRESSURE	DISCHARGE TIME	DISCHARGE RANGE
466403	100psi	55sec.	30-45ft.

KIDDE 25074 6 LITER CLASS K WET CHEMICAL FIRE EXTINGUISHER

- Suitable for use on Class K cooking grease and oil fires



ITEM #	OPERATING PRESSURE	DISCHARGE TIME	DISCHARGE RANGE
25074	100psi	55-60sec.	8-12ft.

KIDDE 466727 PROPLUS 2.5 H HALOTRON FIRE EXTINGUISHER

- Suitable for use on Class B (liquids) and Class C fires (energized electrical equipment)



ITEM #	OPERATING PRESSURE	DISCHARGE TIME	DISCHARGE RANGE
466727	100psi	9sec.	6-10ft.

KIDDE 466728 PROPLUS 5 H HALOTRON FIRE EXTINGUISHER

- Suitable for use on Class B (liquids) and Class C fires (energized electrical equipment)



ITEM #	OPERATING PRESSURE	DISCHARGE TIME	DISCHARGE RANGE
466728	100psi	9sec.	9-15ft.

**HONEYWELL SK-6808
198-POINT ADDRESSABLE
FIRE ALARM CONTROL PANEL**

- Includes connected panel options, wireless detection, enhanced communications
- Built-in dual path IP & POTS communication for reliable dual path backup



ITEM #	VISIBILITY	PANEL CONNECTIONS
SK-6808	Single Point	17

**HONEYWELL HWTG7LVF0
TELGUARD CLSS-ENABLED
LTE COMMERCIAL FIRE
ALARM COMMUNICATOR**

- Product Type: Fire Alarm Communicator
- Color: Red
- Sensor Connectivity: Hardwired, Wireless
- Transmit Power: 200 mW in all bands



ITEM #	INPUT VOLTAGE	CELLULAR GENERATION
HWTG7LVF0	12 V AC	4G LTE

**HONEYWELL FIRE-LITE
FL-PS10 10 AMP 120VAC
REMOTE CHARGER POWER
SUPPLY**

- Can be connected to any 12V or 24V fire alarm control panel (FACP) or used as a standalone power supply



ITEM #	FLOAT-CHARGE VOLTAGE	MAX. CURRENT CHARGE
FL-PS10	27.6 VDC	1.5 A

**HONEYWELL SK-5496 6A
INTELLIGENT REMOTE
POWER SUPPLY**


- AC power connection, battery charging circuit, & backup battery for use with Silent Knight addressable fire alarm control panels



ITEM #	AMPS
SK-5496	6

**HONEYWELL PWRMOD24 3
AMP NAC POWER EXTENDER
MODULE**

- Product Type: Fire Alarm Control Panel Power Extender
- Device Supported: Control Panel
- Compatibility: Fire-Lite Alarm Endurance Series Control Panels



ITEM #	NAC POWER EXTENDER
PWRMOD24	3A (Additional)

**HONEYWELL MS-9600UDL
ADDRESSABLE FIRE ALARM
CONTROL PANEL**

- 318-point addressable fire alarm control panel
- Optional Digital Alarm Transmitter/Communicator
- Optional second Signaling Line Circuit



ITEM #	ACM
MS-9600UDL	Up to 32 ACM

**HONEYWELL ES-200X
198-POINT ADDRESSABLE
FIRE ALARM CONTROL PANEL**

- Built-in dual path communications
- Programmable buttons
- Supports combined fire and CO addressable detection



ITEM #	PROGRAMMABLE
ES-200X	Yes

**HONEYWELL MMF-300
ADDRESSABLE MONITOR
MODULE**

- Product Type: Fire Alarm Control Panel Power Extender
- Device Supported: Control Panel
- Compatibility: Fire-Lite Alarm Endurance Series Control Panels



ITEM #	NAC POWER EXTENDER
MMF-300	3A (Additional)

**HONEYWELL SK-6700
50-POINT ADDRESSABLE
FIRE ALARM CONTROL
PANEL**

- Max. 100 point single loop addressable fire alarm control panel



ITEM #	ACM
SK-6700	Up to 17

**HONEYWELL FL-ES50X
50-POINT ADDRESSABLE FIRE
ALARM CONTROL PANEL**

- 50-point addressable fire alarm control panel
- Listed to UL Standard 864, 10th edition
- Built-in dual path communications



ITEM #	PROGRAMMABLE
FL-ES50X	Yes

**SIGCOM AN-DAPB100
100W DISTRIBUTED AUDIO
POWER BOOSTER FOR VOICE
EVACUATION SYSTEM**


- Includes 4 fully supervised speaker circuits (Class A or B)
- Supports 25 Vrms speaker circuits and option for 70 Vrms
- Built in UL listed power supply with backup battery charger



ITEM #	DIGITAL AMPLIFIER
AN-DAPB100	110W High Efficiency

**SPACE AGE ELECTRONICS
T24DG T SERIES 24V TERM
SPUD**


- Dataline Protection: Audio, Network, Video/Data
- ABS Polycarbonate type AF-312 Enclosure



ITEM #	VOLTAGE	SERIES VOLTAGE
T24DG	24V	30V

**HONEYWELL SK-ISO-6 6
OUTPUT ISOLATOR MODULE**

- Powered by SLC loop directly, no external power required
- Individual LED status indicators



ITEM #	ISOLATION
B200SWH	6 Groups of Devices

**DITEK DTK-240HW
220V HARDWIRE SURGE
PROTECTOR**

- Product Type: Surge Suppressor/Protector
- Parallel connected AC surge protector



ITEM #	INPUT/OUTPUT VOLTAGE	MAX. LINE CURRENT
DTK-240HW	240 V AC	15 A

**HONEYWELL B5001-WHITE 4"
PLUG-IN DETECTOR BASE**

- Electrical Ratings – includes base and detector
- Listings: UL268, ULC S529



ITEM #	OPERATING VOLTAGE	STANDBY CURRENT
B5001-WHITE	15-32 VDC	150 µA

**HONEYWELL CRF300
ADDRESSABLE RELAY
MODULE**

- A trouble condition on the external power supply will never interfere with the rest of the system
- Built-in type identification automatically identifies this device to the control panel



ITEM #	OUTPUT
CRF300	Dry Contact

KIDDE 120V AC-DC WIRE-IN SMOKE ALARM, BATTERY BACKUP

- Ionization Sensing Technology
- One button design (operates Smart Hush™ and test)
- Large mounting base
- 9V battery backup included
- Tamper resist feature
- Alarm memory
- Pre-stripped wiring harness with tinned strands



ITEM #	DEPTH	DIAMETER	WEIGHT
i12040	1.55"	5.6"	2.50 lbs

KIDDE I12060A 120V AC/DC WIRE-IN IONIZATION SMOKE ALARM WITH 9V BATTERY BACK UP

- Power Source: 120VAC, 60HZ, 9V battery backup
- Audio Alarm: 85dB at 10ft
- Temperature Range: 40°F (4.4°C) to 100°F (37.8°C)
- Humidity Range: 5%-95% relative humidity (RH)



ITEM #	SIZE	WEIGHT
I12060A	5 in diameter x 1.75 in depth	0.5lbs

KIDDE I4618A FIREX 120V SMOKE ALARM WITH BATTERY BACK-UP AND FALSE ALARM CONTROL

- Ionization sensing technology
- UL 217



ITEM #	ALARM POINTS	HORN OUTPUT
I4618A	obs. 1.35 ± 0.7%/ft.	85 decibels at 10ft.

KIDDE KN-COP-IC AC HARDWIRED OPERATED CARBON MONOXIDE ALARM WITH DIGITAL DISPLAY

- Power Source: 120VAC, 60HZ, 9V battery back-up
- Sensor: Electrochemical
- Audio Alarm: 85dB at 10ft



ITEM #	SIZE	WEIGHT
KN-COP-IC	5.75" diameter x 1.8" depth	1lb.

KIDDE PI9010 DUAL SENSOR BATTERY OPERATED SMOKE ALARM

- Power Source: 9V Battery
- Sensor: Dual Ionization & Photoelectric
- Audio Alarm: 85dB at 10ft



ITEM #	SIZE	WEIGHT
PI9010	5.75" diameter x 1.8" depth	1lb.

KIDDE 21006377-N SMOKE AND CO COMBINATION ALARM

- SmokeSensor: Ionization
- Co Sensor: Electrochemical
- Audio Alarm: 85dB at 10ft



ITEM #	SIZE	WEIGHT
21006377-N	5.6" diameter x 1.8" depth	1lb.

KIDDE KN-COU-B ULTRA-SENSITIVE BATTERY POWERED CARBON MONOXIDE MONITOR

- Power Source: 3-AA Batteries
- Sensor: Electrochemical
- Audio Alarm: 85dB at 10ft



ITEM #	SIZE	WEIGHT
KN-COU-B	4.5"L x 2.75"H x 1.5"D	0.5lb.

HONEYWELL SK-PULL-DA ADDRESSABLE DUAL ACTION PULL STATION

- A dual action pull station requiring two motions to activate the station
- Installer can open station without causing an alarm condition
- Key operated test and reset lock using lock plate actuator
- Key matches compatible FACP locks
- Braille text on station handle
- Rotary address switches for fast installation
- UL listed



ITEM #

Honeywell

SK-PULL-DA

HONEYWELL 365 ADDRESSABLE DETECTOR

- Analog communications
- Low standby current
- Rotary address switches
- Dual LEDs for 360° visibility
- Includes 6" mounting base and trim ring



Honeywell

ITEM #	DETECTS
SD365	Photoelectric Smoke
H365	Heat

HONEYWELL SK-PHOTO ADDRESSABLE SMOKE DETECTOR

- Low standby current
- Dual LED design provides 360° viewing angle



Honeywell

ITEM #	TYPE
SK-PHOTO-W	Photoelectric
SK-PHOTO-TW	Photo/Thermal

HONEYWELL B200SWH ADDRESSABLE SOUNDER BASE WHITE

- Addressability for maximum configuration flexibility
- Complies with UL® Standard 268 and UL® Standard 464



Honeywell

ITEM #	OUTPOINT
B200SWH	Multiple Event-Driven Tonal

HONEYWELL 365 ADDRESSABLE DETECTOR

- Analog communications
- Low standby current
- Rotary address switches
- Dual LEDs for 360° visibility



Honeywell

ITEM #	DETECTS
H365	Heat
SD365	Photoelectric Smoke

HONEYWELL BG-12LX ADDRESSABLE MANUAL PULL STATION

- Addressable manual fire alarm pull station
- Provides an alarm initiating input signal to conventional fire alarm control panels




Honeywell

ITEM #	NORMAL OPERATING VOLT.
BG-12LX	24VDC

HONEYWELL PWRMOD24 3 AMP NAC POWER EXTENDER MODULE

- Product Type: Fire Alarm Control Panel Power Extender
- Device Supported: Control Panel
- Compatibility: Fire-Lite Alarm Endurance Series Control Panels




Honeywell

ITEM #	NAC POWER EXTENDER
PWRMOD24	3A (Additional)

HONEYWELL SLC-2LS ADDITIONAL SLC LOOP FOR MS-9600LS AND MS-9600UDLS

- Easy mount chassis
- Large enclosure allows 18 amp-hour batteries



Honeywell

ITEM #	SWITCHING POWER SUPPLY
SLC-2LS	7AMP

FIRE DETECTION | HORN STROBES, CABINETS & ESCAPE LADDERS

KIDDE 468044 FIRE EXTINGUISHER SEMI-RECESSED CABINET

- Longer life in outdoor applications
- Safe tempered glass
- Resists chipping, peeling and flaking like enamel
- Contents kept safe and secure
- Reduced accidental breakage



Honeywell

ITEM #	RATED WATTS
468044	9" x 18-1/4" x 6"

KIDDE 468046 FIRE EXTINGUISHER SEMI-RECESSED CABINETS/KEYED STEEL CAM LOCK

- Longer life in outdoor applications
- Safe tempered glass
- Resists chipping, peeling and flaking like enamel
- Contents kept safe and secure
- Reduced accidental breakage



Kidde

ITEM #	RATED WATTS
468046	9" x 18" x 5"

KIDDE 468041 FIRE EXTINGUISHER SURFACE MOUNTED CABINET - 5LB

- Longer life in outdoor applications
- Safe tempered glass
- Resists chipping, peeling and flaking like enamel
- Contents kept safe and secure
- Reduced accidental breakage



Kidde

ITEM #	RATED WATTS
468041	6" x 18" x 6"

SYSTEM SENSOR WALL-MOUNT HORN STROBE

- Connectivity Technology: Wired
- Fire Alarm, Indoor
- Tamper-Resistant
- Input Voltage: 33 V DC



SYSTEM SENSOR

ITEM #	FUEL
BK-P2WL	White
BK-P2RL	Red

SYSTEM SENSOR P2RK OUTDOOR HORN STROBE

- Type: Two-Wire
- Finish: Red
- Mounting: Wall



SYSTEM SENSOR

ITEM #	Peak Output (dBA)	FLASH (CANDELA)
P2RK	88	15-115 Selectable

KIDDE FIRE ESCAPE LADDER

- Quick and easy escape from two- or three-story homes
- Store compactly
- Deploys quickly



Kidde

ITEM #	STORIES	HEIGHT
KL-2S	2 Stories	13ft.
KL-3S	3 Stories	25ft.

DECORATIVE DISK

4 Kelvin Selectable Sizes
5", 7", 9", 11"
ROUND or SQUARE

5 Kelvin Settings
2700K, 3000K,
3500K, 4000K, 5000K

Optional Built-In Emergency
Same Low Profile Design
with Replaceable Backup Battery

120V Triac Dimming or DUAL 120V/0-10V Dimming



SELECTABLE TROFFER

3 Wattage & Kelvin Selectable Sizes
1x4, 2x2, 2x4



Optional Sensors and Emergency Backup
Field or Factory Installation

OPTUS COMMERCIAL CAN

4 Wattage Selectable Sizes
7-9-12 Watts (4")
9-12-19 Watts (6")
11-19-29 Watts (8")
18-27-36 Watts (10")

Kelvin Selectable
3000K, 3500K, 4000K, 5000K



OPTUS

SELECTABLE STRIP

3 Wattage & Kelvin Selectable Sizes
2', 4', 8'



Easy to Ship
8ft Ships Like a 4ft

Optional Sensors and Emergency Backup
Field or Factory Installation

FLOOD LIGHTS

Built-In Photocell
Simple, Replaceable Switch for
On/Off Operation

3 Kelvin & Wattage
Selectable Sizes

15W/25W/35W
50W/70W/90W
105W/120W/150W



ECONOMY ROUND HIGH BAY

3 Wattages in Two Finishes
90W, 135W, 180W



Field Installable Sensors
Easily Upgrade with Optional Sensors
using the Removable Shorting Cap


Energy Efficient
162 lm/W

EMERGENCY HOT SPOT

Retrofit Any Fixture
90 Minutes of Emergency Service

Compact & Efficient

8 Watt Driver
90 Minute Battery Pack
Illuminated Test Button
1,200 Lumen LED Strip

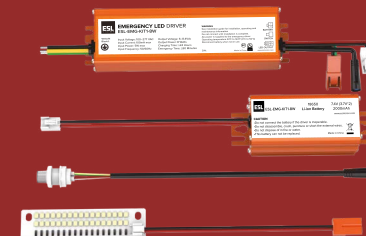

CUTTING-EDGE
LED
TECHNOLOGY & DESIGN



WWW.ESLVISION.COM
888.493.5559

ABB ACH580-01-012A-4 7.5HP, 480V, 12.0A AC DRIVE

- AC Drive for HVAC
- Wall-Mounted
- User Friendly Control Panel with Bluetooth Option
- Versatile for HVAC Applications
- Programmed Protection Circuits



ITEM #	HP(VT)	AMPS(VT)
ACH580-01-012A-4	40HP	52A

ABB ACH580-BDR-052A-4F267 40HP, 480V, AC DRIVE

- AC Drive for HVAC
- Wall-Mounted
- User Friendly Control Panel with Bluetooth Option
- Flux Breaking



ITEM #	HP(VT)	AMPS(VT)
ACH580-BDR-052A-4+F267	40HP	52A

ABB ACH580-01-012A-4 7.5HP, 480V, 12.0A AC DRIVE

- Voltage: 480VAC
- Horsepower: 30HP
- Drive Current: 44A



ITEM #
ACH580-VCR-044A-4+F267

ALLEN BRADLEY 20BD040A0AYNANCO POWERFLEX 30HP 480V INVERTER, AC DRIVE

- Includes IP20 NEMA/UL Type 1, Open/Flange, IP54 NEMA 12
- Provides V/Hz control, sensorless vector control, and vector control with FORCE™ Technology



ITEM #	HP(VT)
20BD040A0AYNANCO	30HP

MARATHON MOTORS 46N404 1-1/2 HP GENERAL PURPOSE MOTOR, 115/208-230V, FRAME 56H

- 1-1/2 HP General Purpose Motor, Capacitor-Start/Run, 1725 Nameplate RPM, Voltage 115/208-230, Frame 56H
- Mounting Position: Horizontal



ITEM #	# OF SPEEDS	MOUNTING
46N404	1	Cradle Base

FASCO D1100 SHADED POLE CONDENSER FAN MOTOR

- OEM replacement motor with sleeve bearing
- Thermally protected
- UL recognized; CSA certified



ITEM #	HP	# OF SPEEDS	VOLTAGE
D1100	1/50	2	115V

FRIEDRICH 2481245 MULTI-ZONE DUCTLESS MINI-SPLIT SYSTEM OUTDOOR UNIT 2 TON HEAT PUMP 230/208V

- Interior/Exterior: Exterior
- Number of Speeds: Heat/Cool
- Operation Type: Outdoor Ductless
- Cooling Capacity: 19200 BTU



ITEM #	COLOR	COVERAGE AREA
2481245	White	1500 sq. ft.

MORRIS TWG840596 DIRECT DRIVE FURNACE BLOWER MOTORS 1 HP 208/230V

- Direct Drive Furnace Blower Motors 1 HP 208/230V 1075/3 Speed provides quick replacement to get your HVAC system running again



ITEM #	HP	SPEED	VOLTAGE
TWG840596	1	1075/3	208/230V

BALDOR RELIANCE EM4310T 60HP, 3560RPM, 3PH, 60HZ MOTOR

- Baldor Reliance EM4310T 60HP, 3560RPM, 3PH, 60HZ Motor
- Synchronous Speed @ Frequency: 3600 RPM @ 60 HZ



ITEM #	OUTPUT @ FREQUENCY
EM4310T	60.000 HP @ 60 HZ

MORRIS TCS-3 CONDENSATE PAN SWITCH


- Detects overflows



ITEM #	SWITCH TYPE
TCS-3	Clip-On Pan Switch w/ Magnetic Reed

MORRIS TCC-1 CONDENSATE COP

- Detects overflows
- Two wire connection for easy hook up to a thermostat "Y" (compressor) circuit
- 5'(1.5 meter) leads, wire nuts, and clamping screws

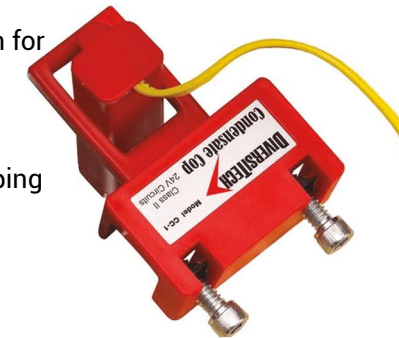

ITEM #	SWITCH TYPE
TCS-1	Small Size 24V/1.5amp NC Reed

MORRIS T72-88330 MOTOR START CAPACITORS VARIABLE CAPACITANCE 330 VAC 72-88 UF

- 330 VAC 72-88 uf stores electrical energy in an electric field
- Round



ITEM #	UF	CAPACITY
T72-88330	72-88	Variable Capacitance

MORRIS MOTOR RUN CAPACITORS SINGLE CAPACITANCE OVAL CAN

- Motor Run Capacitors Single Capacitance Oval Can - 440 VAC stores electrical energy in an electric field
- Oval metal can
- Single capacitance



ITEM #	UF	CAPACITY
T45075H	7.5	Single Capacitance
T45100H	10	Single Capacitance
T45125H	12.5	Single Capacitance
T45150H	15	Single Capacitance
T45175H	17.5	Single Capacitance
T45200H	20	Single Capacitance
T45250H	25	Single Capacitance
T45300H	30	Single Capacitance
T45350H	35	Single Capacitance
T45450H	45	Single Capacitance
T45500H	50	Single Capacitance
T45550H	55	Single Capacitance
T45600H	60	Single Capacitance
T45700H	70	Single Capacitance
T45800H	80	Single Capacitance

YELLOW SURE GRIP WIRE CONNECTORS MASTER PACK 500

- Fully approved up to 600V building wire approval
- 1000V max. in signs, fixtures or luminaries



ITEM #	RATED	USE WITH
W6100-YELW	600V Max.	Copper Wire

RED SURE GRIP WIRE CONNECTORS MASTER PACK 500

- Fully approved up to 600V building wire approval
- 1000V max. in signs, fixtures or luminaries



ITEM #	RATED	USE WITH
W6100-RED	600V Max.	Copper Wire

GREY SURE GRIP WIRE CONNECTORS MASTER PACK 1000

- Fully approved up to 600V building wire approval
- 1000V max. in signs, fixtures or luminaries



ITEM #	RATED	USE WITH
W5700-Grey-Small	600V Max.	Copper Wire

BLUE SURE GRIP WIRE CONNECTORS MASTER PACK 1000

- Fully approved up to 600V building wire approval
- 1000V max. in signs, fixtures or luminaries



ITEM #	RATED	USE WITH
W5600-Blue-Small	600V Max.	Copper Wire

ORANGE GRIP WIRE CONNECTORS MASTER PACK 500

- Fully approved up to 600V building wire approval
- 1000V max. in signs, fixtures or luminaries



ITEM #	RATED	USE WITH
W5000-OR	600V Max.	Copper Wire

RAIN BIRD WATERPROOF WIRE CONNECTORS, 10 PACK

- Easy to use, one-step installation to ensure a solid connection
- The connectors are filled with silicone gel
- Wire Range: Min #22 Max #12



ITEM #	RATED	USE WITH
077985013370	600V Max.	Copper Wire

YELLOW WINGED WIRE CONNECTORS MASTER

- Fully approved up to 600V building wire approval
- Can be used with solid or stranded copper wire
- 1000V max. in signs, fixtures or luminaries



ITEM #	PACK AMOUNT
WP11-YELW	500
WP111-BOX-YELW	100

RED WINGED WIRE CONNECTORS MASTER

- Fully approved up to 600V building wire approval
- Can be used with solid or stranded copper wire
- 1000V max. in signs, fixtures or luminaries



ITEM #	PACK AMOUNT
WP13-RED	500
WP-133-BOX- RED	100

GREEN WINGED WIRE CONNECTORS MASTER

- Fully approved up to 600V building wire approval
- Can be used with solid or stranded copper wire
- 1000V max. in signs, fixtures or luminaries



ITEM #	PACK AMOUNT
WP-7000-GREEN	500
WP-722-BOX-GREEN	100

GREY WINGED WIRE CONNECTORS

- Fully approved up to 600V building wire approval
- Can be used with solid or stranded copper wire
- 1000V max. in signs, fixtures or luminaries



ITEM #	PACK AMOUNT
WP12-TAN	500
WP122-BOX-TAN	100

BLUE WINGED WIRE CONNECTORS MASTER

- Fully approved up to 600V building wire approval
- Can be used with solid or stranded copper wire
- 1000V max. in signs, fixtures or luminaries



ITEM #	PACK AMOUNT
W5400-BLUE	100
WP5400-BOXLRGBLUE	50

BLUE WINGED WIRE CONNECTORS MASTER

- Fully approved up to 600V building wire approval
- Can be used with solid or stranded copper wire
- 1000V max. in signs, fixtures or luminaries



ITEM #	PACK AMOUNT
W5500-GREY	250
WP550-BOX-LRGGRAY	50

IDEAL WT51-B WINGTWIST YELLOW WIRE CONNECTORS, BAG OF 500

- Contoured wing design provides maximum torque
- Flexible shell expands for smooth, progressive tightening providing dependable connections



ITEM #	PACK AMOUNT
WT51-B	500

IDEAL WT52-B WINGTWIST RED WIRE CONNECTORS, BAG OF 500

- Contoured wing design provides maximum torque
- Flexible shell expands for smooth, progressive tightening providing dependable connections



ITEM #	PACK AMOUNT
WT52-B	500

IDEAL WT41-B WINGTWIST TAN WIRE CONNECTORS, BAG OF 500

- Contoured wing design provides maximum torque
- Flexible shell expands for smooth, progressive tightening providing dependable connections



ITEM #	PACK AMOUNT
WT41-B	500

PRECISION CONTROLS PHOTOCELL BUTTON, WALL PLATE

- May be used with other brand wall packs running on 120V
- Time Delay: Minimum 15 seconds.
- Switch Type: Single-pole, single-throw



ITEM #	USE WITH WALL PACKS ON
A105W	120V
A1068W	208V, 220V, 240V or 277V

PRECISION CONTROLS PHOTOCELL BUTTON

- May be used with other brand wall packs running on 120V
- Time Delay: Minimum 15 seconds.
- Switch Type: Single-pole, single-throw



ITEM #	USE WITH WALL PACKS ON
A105	120V
A1068	208V - 277V

PRECISION CONTROLS DIRECT WIRE IN PHOTO CONTROL

- 1 to 3 foot-candles. External light level slide allows field adjustment between 3 to 10 foot-candles
- Moisture proof, color coded lead wire
- Wire length: 6in.



ITEM #	VOLT-AMPERE	USE WITH WALL PACKS ON
T15	1100VA	120V
T30	3000VA	130V
T168	1100VA	208-277V
ST15	1100VA	120V

PRECISION CONTROLS ET15 PHOTO CONTROL SWIVEL TYPE DIRECT WIRE 1100VA 120V

- 1 to 3 foot-candles. External light level slide allows field adjustment between 3 to 10 foot-candles
- Moisture proof, color coded lead wire
- Wire length: 6in.



ITEM #	USE WITH WALL PACKS ON
ET15	120V

PRECISION CONTROLS ET168 PHOTO CONTROL SWIVEL TYPE 1100VA 208-277 VAC

- 1 to 3 foot-candles. External light level slide allows field adjustment between 3 to 10 foot candles
- Moisture proof, color coded lead wire
- Wire length: 6in.



ITEM #	USE WITH WALL PACKS ON
ET168	208-277V

PRECISION CONTROLS P2275 LOCKING TYPE PHOTO CONTROL 1000VA 120V

- May be used with other brand wall packs running on 120V



ITEM #	TURN-ON	TURN-ON/OFF RATIO	TIME DELAY
P2275	1ft. Candles	1:1:5	5 sec.

PRECISION CONTROLS LUMATROL LOCKING-TYPE PHOTO CONTROL 105-285 VOLT / 1800 WATT

- Provides a tighter turn on/turn off ratio
- Reduces energy costs



ITEM #	RATED	USE WITH
ECDV-AP-TD	600V Max.	Copper Wire

INTERMATIC EK4236S STEM AND SWIVEL MOUNT ELECTRONIC PHOTOCONTROL, 120-277V

- Ideal for LED fixtures with long-life expectations
- Fail ON mode



ITEM #	ON/OFF CYCLES	USE WITH
EK4236S	>10,000	HID or LID

INTERMATIC TOP STEM AND SWIVEL MOUNT ELECTRONIC PHOTOCONTROL, 120-277V

- Ideal for LED fixtures with long-life expectations
- Fail ON mode



ITEM #	ON/OFF CYCLES	USE WITH
EK4736S	>10,000	HID or LID

INTERMATIC EK4536 SELECT GRADE LOCKING TYPE ELECTRONIC PHOTOCONTROL

- LED-compatible
- 8-year warranty



ITEM #	ON/OFF CYCLES	USE WITH
EK4536	>10,000	HID or LID

INTERMATIC K4123C STEM MOUNT THERMAL PHOTOCONTROL, 208-277V

- Install on standard outdoor light fixtures and electrical boxes
- Delay feature prevents unwanted OFF switching



ITEM #	FAIL MODE	USAGE ENVIRONMENT
K4123C	On	Outdoor

NSI TORK 2129A PHOTOCONTROL STEM, DIE-CAST ALUMINUM, 120/277V

- Housing Material Die-Cast
- Setting On/Off
- Standards ANSI/UL773A



ITEM #	VOLTAGE	MAX. WATTS
2129A	120/208V	1,800W

KEYSTONE KT-WPLED-PS-UV-KO FULL CUT-OFF WALL PACK BUTTON PHOTOCELL

- Full Cut-Off Wall Pack Button Photocel



ITEM #	SIZE
KT-WPLED-PS-UV-KO	14.17W x 18.11H x 10.24D

KEYSTONE KT-TLP-UV-3PN NEMA ANSI 3-PIN TWIST-LOCK PHOTOCELLS 120-277V


- 3-pin twist-lock photocells for use with LED area lights



ITEM #	VOLTAGE	MAX. WATTS
KT-TLP-UV-3PN	120-277V	1,800VA

HOWARD LIGHTING BUTTON STYLE PHOTOCONTROL

- Use With Howard Industries Wallpack Luminaires
- UL Listed
- Dimensions: 2x1.1x0.8in

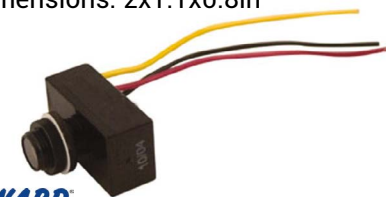

ITEM #	VOLTAGE
BPC120	120V
BPC208/277	208/277V

KEYSTONE KT-TLP-HV-3PN NEMA ANSI 3-PIN TWIST-LOCK PHOTOCELLS 200-480V

- 3-pin twist-lock photocells for use with LED area lights



ITEM #	VOLTAGE	MAX. WATTS
KT-TLP-HV-3PN	200-480V	1,800VA

WESTGATE PC-1 PHOTOCONTROL

- Westgate Manufacturing 277V Stem Mount 1800W Photocell (PC-1H)



ITEM #	VOLTAGE	POWER CONSUMPTION
PC-1	120V AC, 50/60Hz	1.5VA

WESTGATE PC-1H PHOTOCONTROL

- Westgate Manufacturing 277V Stem Mount 1800W Photocell (PC-1H)



ITEM #	VOLTAGE	POWER CONSUMPTION
PC-1H	277V AC, 50/60Hz	1.5VA

WESTGATE PC-1S PHOTOCONTROL

- Westgate Manufacturing Photocell Swivel Arm 120V 1000W (PC-1S)



ITEM #	MIN. OPERATING TEMP.	MAX. OPERATING TEMP.
PC-1S	-40	158

WESTGATE PC-2S PHOTOCONTROL

- Westgate Manufacturing Photocell Swivel Arm 120VAC 1800W (PC-2S)



ITEM #	MIN. OPERATING TEMP.	MAX. OPERATING TEMP.
PC-2S	-40	158

WESTGATE PC-B PHOTOCONTROL

- PC-B is a dusk-to-dawn photocell light switch with input voltage of 120VAC



ITEM #	MIN. OPERATING TEMP.	MAX. OPERATING TEMP.
PC-B	-40	158

WESTGATE PC-BU PHOTOCONTROL

- PC-BU is a dusk-to-dawn photocell light switch with input voltage of 120-277VAC



ITEM #	MIN. OPERATING TEMP.	MAX. OPERATING TEMP.
PC-BU	-40	158

WESTGATE PC-BP PHOTOCONTROL

- PC-BP is a dusk-to-dawn photocell light switch with input voltage of 120VAC



ITEM #	MIN. OPERATING TEMP.	MAX. OPERATING TEMP.
PC-BP	-40	158

WESTGATE PC-BUM PHOTOCONTROL

- Westgate Manufacturing Mini Button Photocell 120-277VAC IP65 600W



ITEM #	MIN. OPERATING TEMP.	MAX. OPERATING TEMP.
PC-BUM	-40	158

WESTGATE PC-TLSC PHOTOCONTROL

- Westgate Manufacturing Twist Lock Shorting Cap For Photocell Socket
- Ideal for dusk to dawn operation



ITEM #	MATERIAL	CASE PACK
PC-TLSC	Polycarbonate Construction	1

WESTGATE PHOTOCONTROL

- Case Pack: 1
- Body Material: Plastic



ITEM #	VOLTAGE	WATTS
PC-TWIST	120-277V	1800W
PC-TWIST-480V	480V	1800W

WESTGATE PC-TLSOC-3PIN PHOTOCONTROL

- 3-Pin Socket Twist Lock For Smart Control Systems



ITEM #	MATERIAL	CASE PACK
PC-TLSOC-3PIN	Plastic	1

WESTGATE PC-TLSOC-7PIN PHOTOCONTROL

- 7-Pin Socket Twist Lock For Smart Control Systems



ITEM #	MATERIAL	CASE PACK
PC-TLSOC-3PIN	Plastic	1

WESTGATE SL-PC 20 WATTS PHOTOCONTROL

- Ideal for doorway, pathway and alleys
- Great for use with optional motion sensors or photocell



ITEM #	WATTAGE	VOLTAGE
SL-PC	20W	90~135V

WESTGATE WEC-3MPC-GY PHOTOCONTROL

- Innovative plug-and-play dusk-to-dawn photocell with a 1/2" threaded



ITEM #	VOLTAGE	POWER CONSUMPTION
WEC-3MPC-GY	120~277V	0.5W Max.

LOTUS LBL-KDB-1 KINETIC DOORBELL - SET OF TRANSMITTER & RECEIVER

- Each transmitter comes with included plug-in receiver



ITEM #	RECEIVER INPUT VOLT.	OPERATION RANGE
LBL-KDB-1	100-240V AC	100ft.

LOTUS LBL-KDB-T1 KINETIC DOORBELL - TRANSMITTER ONLY

- Each transmitter comes with included plug-in receiver
- Can be paired with up to 100 receivers for multiple points of notification around the building they are installed in




ITEM #	RECEIVER INPUT VOLT.	OPERATION RANGE
LBL-KDB-T1	100-240V AC	100ft.

LOTUS LBL-KDB-R1 KINETIC DOORBELL - RECEIVER ONLY


- Each transmitter comes with included plug-in receiver
- Can be paired with up to 100 receivers for multiple points of notification around the building they are installed in




ITEM #	RECEIVER INPUT VOLT.	OPERATION RANGE
LBL-KDB-R1	100-240V AC	100ft.

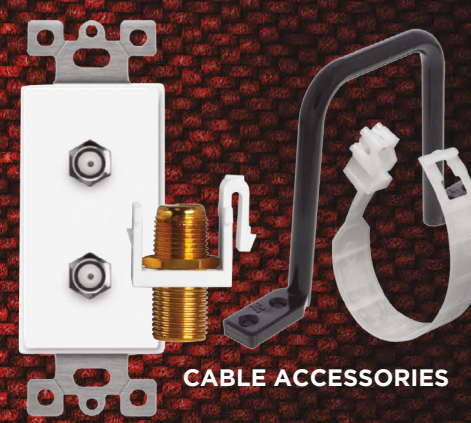

GO TO **litestoreusa.com** to shop our wide selection of wires, cables & cords!

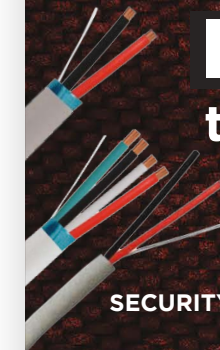

SECURITY CABLES

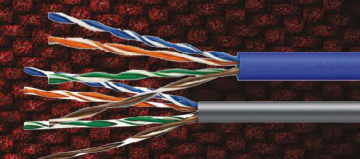


CAT5/CAT6 WIRE



THERMOSTAT WIRE



COAXIAL CABLES

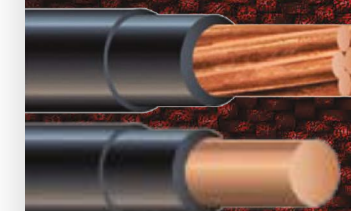

THHN WIRE



MC CABLE



PORTABLE POWER CORDS

TORK TIME SWITCH-ONE CHANNEL SIGNAL TIMER

- Digital programmable switches provide precise control



TORK

ITEM #	VOLTAGE	AMPS
DGS100	120V	20.0A

TORK TIME SWITCH-ONE CHANNEL TIME SWITCH

- Capable of same schedules each day of the week, ON & OFF SET POINTS: 20 per day, minimum setting is one minute



TORK

ITEM #	VOLTAGE	AMPS
E101B	120/277V	40.0A

INTERMATIC ET8215C 7-DAY ASTRONOMIC BASIC ELECTRONIC CONTROL TIME SWITCH

- Offers an easy way to upgrade from a basic mechanical time switch to an electronic time switch
- They come in standard 24-hour, 7-day & 7-day astronomic versions



INTERMATIC

ITEM #	VOLTAGE
ET8215C	120/277 VAC

INTERMATIC T101P 24-HOUR MECHANICAL TIME SWITCH

- Direct 24-hour control of most loads
- Up to 12 ON/OFF operations each day with minimum ON/OFF times of one hour
- Manual override



INTERMATIC

ITEM #	VOLTAGE	AMPS
T101P	120 VAC	16A

INTERMATIC T103P 24-HOUR MECHANICAL TIME SWITCH

- Direct 24-hour control of most loads
- Up to 12 ON/OFF operations each day with minimum ON/OFF times of one hour
- Manual override



INTERMATIC

ITEM #	VOLTAGE	AMPS
T103P	120 VAC	16A

INTERMATIC T104P 24-HOUR MECHANICAL TIME SWITCH

- Direct 24-hour control of most loads
- Up to 12 ON/OFF operations each day with minimum ON/OFF times of one hour
- Manual override



INTERMATIC

ITEM #	VOLTAGE	AMPS
T104P	120 VAC	16A

INTERMATIC WH40 MECHANICAL WATER HEATER TIME SWITCH

- Allow for basic control of electric water heaters
- Offer a minimum ON/OFF time of one hour



INTERMATIC

ITEM #	VOLTAGE	AMPS
WH40	120/277 VAC	40A

INTERMATIC ET2805CR ELECTRONIC TIMER ASTRO 7/365 DAYS 30A

- 100-hour supercapacitor eliminates the need for batteries
- Up to 96 set points or events



INTERMATIC

ITEM #	VOLTAGE	AMPS
ET2805CR	120/277 VAC	30A

KICHLER TRANSFORMER DIGITAL TIMER

- Digital Transformer Timer - Integrated battery backup



KICHLER

ITEM #	VOLTS	COLOR
15556WH	120/277V	White
15557BK	120V	Black

TORK 24 HOUR MECHANICAL TIME SWITCH

- Automatic On-Off control when operation is required at the same time every day, 7 days a week
- Amperage: 40.0 Amps



TORK

ITEM #	VOLTS	COLOR
1109A	120V	Grey
1102	208/277V	Grey
1104NC	208/277V	Cream

PRECISION 24 HR. DIAL TIME SWITCH

- Housing: NEMA 3R Raintight Plastic
- Set Points: Up To 10 On/Off per Day



Precision

ITEM #	VOLTS	AMPS
PMC-CD103	120V	40.0A
PMC-CD102	208/277V	40.0A

SMARTSIGN ENAP "CAUTION - STANDBY GENERATOR" LABEL 5" X 7" POLYESTER ADHESIVE

- 2 mils thick polyester



SmartSign

ITEM #	DIMENSIONS
ENAP	7 x 0.01 x 5 inches

IW1284-OZ-L CLASS 2 HIGH VISIBILITY ORANGE SAFETY VEST, KNITTED FABRIC

- Class 2 High Visibility Orange Safety Vest, Knitted Fabric



LITESTORE
Electrical & Lighting Supply

ITEM #	REFLECTIVE BANDS
IW1284-OZ-L	2-inch

HEAVY-DUTY HARD HAT

- A smooth, easy turning ratchet suspension system sits low on the head to reduce pressure
- Suspension Type: 4 Point Ratchet



LITESTORE
Electrical & Lighting Supply

ITEM #	MAX. GENERATOR RUNNING WATTS
HH	White
HH-BU	Blue
HH-Y	Yellow

US MOTORS H60P2E SEVERE DUTY MOTOR 3 PH PHASE, 60 HP, 1800 RPM, 230/460 V, 364T FRAME

- Motor Category: General Severe Duty Motor
- Motor Phase: 3 HP



ITEM #	HORSEPOWER	SUPPLY VOLTS
H60P2E	60.0HP	230/460 V

BALDOR-RELIANCE MOTOR EM2333T, 15HP, 1765RPM, 3PH, 60HZ, 254T

- Ball bearings
- Suitable for mounting any position
- Heavy gauge steel and cast iron frames



ITEM #	HORSEPOWER	SUPPLY VOLTS
EM2333T	16HP	230/460 V

BALDOR RELIANCE MOTOR EM4314T 60HP, 3 PHASE, 1800 RPM, 230/460 V, 364T FRAME

- General Purpose Motor
- 3 ph, 60 hp, 1800 rpm, 230/460 V, 364T Frame, TEFC Enclosure



ITEM #	HORSEPOWER	SUPPLY VOLTS
EM4314T	60HP	230/460 V

12512ET3G445T-W22 NEMA PREMIUM EFFICIENCY 125 HP 6P 444/5T 3PH MOTOR

- With cast iron frame, flexible mounting, solid and whole feet, and lower noise levels and operating temperatures, the W22 motors are perfectly suitable for a great variety of industrial applications



ITEM #	VOLTS	FREQUENCY
12512ET3G445T-W22	460V	60 Hz

LEESON ELECTRIC 122182 2 HP, 3 PH, 1800 RPM WASHDOWN DUTY MOTOR

- General Purpose Washdown Duty Motor (Painted) - General Purpose Motor (Painted), 2 hp, 3 ph, 1800 rpm, 208-230/460 V, 145TC Frame, TEFC Enclosure



ITEM #	VOLTS	FREQUENCY
122182	208-230/460 V	50/60 Hz

MEDIUM BASE HID SOCKET E26 BASE

- Replaces or Retrofits existing mogul bulb fixtures that require a 5KV pulse rated



ITEM #	VOLTS	WATTS
LH-MEE-01	600V	1500W

MOGUL BASE SOCKET E39 BASE

- UL listed standard mogul base socket
- Starting pulse rating 5KV



ITEM #	VOLTS	WATTS
LH-MEE-01	600V	1500W

D353 MEDIUM TO CANDELABRA REDUCER - RATED 75W - 125V

- Case Quantity: 10
- Bulb Finish: Black



ITEM #	VOLTS	WATTS
D353	125V	75W

D350 MEDIUM TO MOGUL ENLARGER - RATED 100W - 250V

- Case Quantity: 10
- Bulb Finish: Black



ITEM #	VOLTS	WATTS
D350	250V	100W

D351 MOGUL TO MEDIUM REDUCER - RATED 600W - 250V

- Case Quantity: 10
- Bulb Finish: White



ITEM #	VOLTS	WATTS
D350	250V	600W

LH0910 4 PIN CFL E26/E27 LAMP SOCKET ADAPTER

- LH0910 Converts a 4 pin CFL lamp holder/socket to an E26/E27 medium base lamp holder/socket



ITEM #	RATINGS	MOUNT STYLE
LH0910	100-250V	Push-In

SATCO 80-2368 FLANGE ADAPTER FROM GU10 TWIST LOCK BASE TO E26 MEDIUM SCREW SOCKET

- E26 to GU10 screw-in pigtail light socket adapter



ITEM #	ADAPTER
80-2368	Ceramic GU10

KEYSTONE KT-SOCKET-RDC-SE-SIGN STATIONARY LAMPHOLDER - RECESSED DOUBLE CONTACT SOCKET

- Socket Type: R17d
- Safety Rating: UL Indoor/Dry Location



ITEM #	VOLTS	WATTS
KT-SOCKET-RDC-SE-SIGN	600V	660W

KEYSTONE KT-SOCKET-RDC-SPR-SIGN SPRING-TYPE LAMPHOLDER - RECESSED DOUBLE CONTACT SOCKET

- Socket Type: R17d
- Safety Rating: UL Indoor/Dry Location



ITEM #	VOLTS	WATTS
KT-SOCKET-RDC-SPR-SIGN	600V	660W

ETLIN DANIELS FLT8T5-PH-BSI/FLT8T5-FH-BSI LINEAR FLUORESCENT LAMPHOLDER (PAIR SET)

- Maintains lamp axis from T8 to T5 on low slot
- UL listed, CSA approved



ITEM #	VOLTS	WATTS
FLT8T5-PH-BSI FLT8T5-FH-BSI	600V	660W

KEYSTONE KT-SOCKET-SL-PE SINGLE PIN SLIMLINE SOCKET WITH PLUNGER END

- Single Pin Slimline Socket with Plunger End



ITEM #	BASE	COLOR
KT-SOCKET-SL-PE	Single Pin	White

KEYSTONE KT-SOCKET-SL-SE SINGLE PIN SLIMLINE SOCKET WITH STATIONARY END

- Single Pin Slimline Socket with Stationary End



ITEM #	BASE	COLOR
KT-SOCKET-SL-SE	Single Pin	White

ETLIN DANIEL FLT8/T5-FH / FLT8/T5-PH T8 TO T5 OFFSET SOCKET ADAPTER SET (PAIR SET)

- Easily Retrofit T8/T12 Fixture into T5 Fixture
- No Need to Change the Whole Old Housing
- UL listed, CSA approved



ITEM #	BASE	COLOR
FLT8/T5-FH FLT8/T5-PH	Mini Bi-Pin	White

KEYSTONE KT-SOCKET-T8-U-S UN-SHUNTED SHORT T8 SOCKET

- Un-Shunted Short T8 Socket



ITEM #	BASE
KT-SOCKET-T8-U-S	Push-through w/ nub



INCON LIGHTING
11561-14LED-120-30H 16
14W LED Decorative White Ring
Frosted Ribbed Acrylic Lens
Indoor Ceiling Light 3000K



EURI LIGHTING
EFH-130W-MD
LED Flame Bulb
Lantern



WESTGATE LCFD-MCT5-BG
Manufacturing 12 Inch Integrated
LED Modern Dome Pendant 25W
1300lm CCT Selectable Black/Gold



ORBIT INDUSTRIES 1021-BH
Black Cast Aluminum Large
Hooded Bullet Landscape Light



INCON LIGHTING
10512-14LED-120-PEN-30H
14W LED Round Brushed
Nickel Pendant Mount Light
Fixture White Lens 3000K



LED LEDR-1B
Dual Head Black
Emergency Fixture
120/277V



ELH 11972/3
Ridgecrest 3 Light 21in
Satin Brass Vanity Light
Wall Light



LiteStoreUSA.com

1832 Wabasso Drive Unit N
West Palm Beach, FL 33409
United States

Toll Free: 1-888-414-0872

Email: support@litestoreusa.com

